

New products for machining technicians



→ Page 15

NEW -M7

The new M7 geometry is designed for grooving and parting off. With medium-high feed rates, its best performance is achieved in steel.



→ Page 16

NEW -M8

The ground M8 geometry will become the first choice for the machining of stainless steel. This geometry can only be used for grooving and parting off.



→ Page 57

NEW -M33

M33 geometry is the ideal extension to the existing M3 geometry, which is particularly suitable for finish machining. This geometry is also exceptionally well-suited to the machining of tough and ductile materials.



→ Page 48+49

→ Page 65+66

NEW GX Mono with DirectCooling

The new generation of the GX MonoClamp tool holder is available with and without DirectCooling. The update to the GX Mono holder ensures greater stability, improved performance and process security.



Solid drilling and bore machining

- 1 HSS drilling
- 2 Solid carbide drilling
- 3 Indexable insert drilling
- 4 Reaming and Countersinking
- 5 Spindle Tooling

Threading

- 6 Taps and thread formers
- 7 Circular and Thread Milling
- 8 Thread turning

Turning

- 9 Turning Tools
- 10 Multifunctional Tools – EcoCut and FreeTurn
- 11 Grooving Tools
- 12 Miniature turning tools

Milling

- 13 HSS Milling Cutters
- 14 Solid Carbide milling cutters
- 15 Milling tools with indexable inserts

Clamping technology

- 16 Adaptors and Accessories
- 17 Workpiece clamping

- 18 Material examples

Table of contents

Symbol explanation	5
Toolfinder – System Overview	5
Toolfinder – Tool selection	6–9
Toolfinder – Base holder and other systems	10
Product programme	11–101
Technical Information	
Cutting Data	102–104
Depths of Cut and Feedrates	105–110
TC – Reference values for profile depth and number of passes	111
Comparison threading system with TC and conventional	112
Grooving depth reduction	113+114
Clamping Methods	115+116
Torque Moment ModularClamp Module Screws	117
Advantages due to DirectCooling	118
Advantages of the trochoidal turning strategy	118
General references	119
Measures for problems and causes of wear	120–122
Chip Breakers Overview	123–126
Example of Coding Grooving Tools	127
Grade description and overview	128+129

CERATIZIT \ Performance

Premium quality tools for high performance.

The premium quality tools from the **CERATIZIT Performance** product line have been designed for specific applications and are distinguished by their outstanding performance. If you make high demands on the performance of your production and want to achieve the very best results, we recommend the Premium tools in this product line.

Advantages due to DirectCooling

- ▲ Improved chip control
- ▲ Longer service life of the indexable insert
- ▲ Greater process security
- ▲ Application of higher cutting data
- ▲ Reduced wear
- ▲ Universal application



cuttingtools.ceratizit.com/int/en/direct-cooling

Symbol explanation

	Grooving		Internal thread		Main Application
	Parting		External thread		Extended application
	Grooving and Turning		Internal machining		Repeatability
	Copy Turning		Internal and external thread		Int. coolant supply
	Circlip Grooves		External machining		DirectCooling
	Axial Grooving and Turning				

F	M	R	F: Fine Machining
			M: Medium Machining
			R: Rough Machining

	Smooth cut
	Irregular cutting depth
	Interrupted cut

-F2	Chip groove
CTPP345	Carbide Grade

System overview

No. of cutting edges	System	Grooving	Parting	Grooving and Turning	Copy Turning	Axial Grooving and Turning	External thread	Internal thread	Circlip Grooves	Internal machining	External machining		Internal machining		Axial machining		Page No.	
											CW (mm)	CDX (max/mm)	DMIN (mm)	CDX (max/mm)	DAXN (Ø min.)	CDX (max/mm)		
											1	SX						
1	FX										2,2 – 9,7	80					27–34	
1	LX										8 – 10	80	200	34	500	39	79–82	
2	GX 09										2 – 3,5	7	16	6			35–51	
	GX 16										2 – 6	12	20,5	11			35–51	
	GX 24										2 – 6	21	42	19	45	25	52–69	
	TC														20			87–94
	AX										3	15			10	15	83–86	
3	TX										0,5 – 5,15	8	46	2	20	3	70–78	

Toolfinder

ModularClamp


MonoClamp



SX




18



19

21+23

25

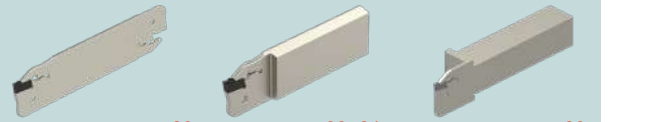

20

22+24


26




FX



32



33



34




GX
09



43



44



47



45



46



50



GX
16



43



44



48



49



45



46








51

Chip groove		Groove width	Grooving	Parting	Grooving and Turning	Copy Turning	Axial Grooving and Turning	Circclip Grooves	Fine Machining	Medium Machining	Rough Machining	Material Legend	Page No.
									F	M	R	Steel Stainless steel Cast iron Non-ferrous metals Heat-resistant Tempered steel Non-metal materials	
SX	-F2	2-4											11
	-M1	2-6											12
	-M2	2-6											13
	-M3	CRE 1,5-3,0											14
	NEW -M7	2-6											15
	NEW -M8	2-6											16
	-27P	2-4											17
FX	-F1	2,2-4,1											27
	-M1	2,2-9,7											28+29
	-27P	2,2-4,1											30
	-R2	3,1-4,1											31
GX 09 GX 16	-F2	GX09/16 2-5											35
	Standard	GX09/16 2-6											36
	-M40	GX09/16 2-6											37
	-M1	GX16 2-4											38
	-27P	GX16 2-6											39
		GX09/16 1-4,25											40
	Standard Radius	GX09/16 CRE 0,8-3,0											41
-27P Radius	GX16 CRE 1,5-2,5											42	

Toolfinder

ModularClamp






MonoClamp

60 61 62

GX
24

63

NEW





Direct
Cooling

64 65

NEW

66 69

67+68

0° 90°

75+76 77

TX

78




LX

81





82






AX

84


0° 90°

85 86

TC

92



93





TC

94


Chip groove		Groove width	Grooving	Parting	Grooving and Turning	Copy Turning	Axial Grooving and Turning	Circclip Grooves	Fine Machining	Medium Machining	Rough Machining	Material Matrix	Page No.
									F	M	R	Steel Stainless steel Cast iron Non-ferrous metals Heat-resistant Tempered steel Non-metal materials	
GX 24	-F2	GX24	3-6										52
	-E	GX24	3-6										53
	-M1	GX24	2-4										54
	-M40	GX24	3-6										55
	-M3	GX24	CRE 1,5-3,0										56
	NEW -M33	GX24	CRE 1,5-3,0										57
	-27P	GX24	3-6										58
	-27PF	GX24	CRE 3-4										59
TX			1,99-2,79										70
			0,57-5,29										71
			CRE 0,25-2,50										72
			1,5-4,0										73
			1,5-3,0										74
LX	-M2		8-10										79
	-M3		CRE 4,0										80
AX	-F50		3									83	

Thread type		Threading		Material Matrix		Page No.	
TC		60°	Full profile				87+88
		60°	Partial profile				89
		55°	Full profile				90
		55°	Partial profile				91



Base holder ModularClamp system

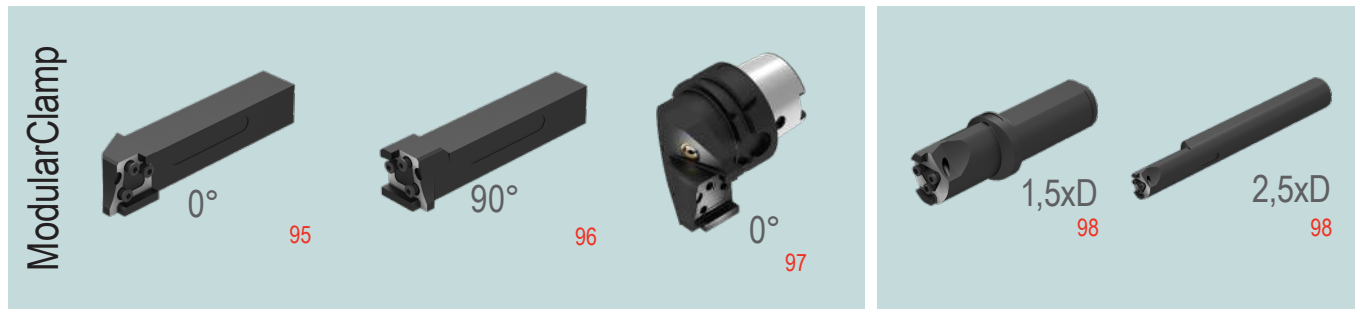

Clamping blocks for blades




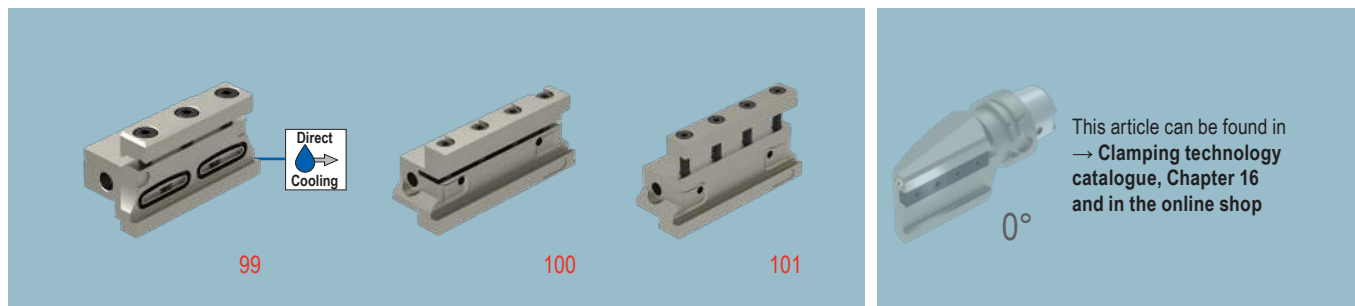


OTHER GROOVING SYSTEMS

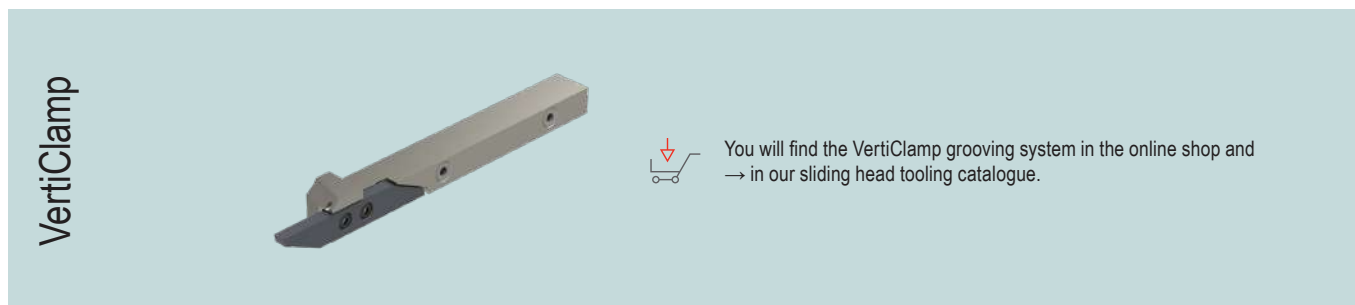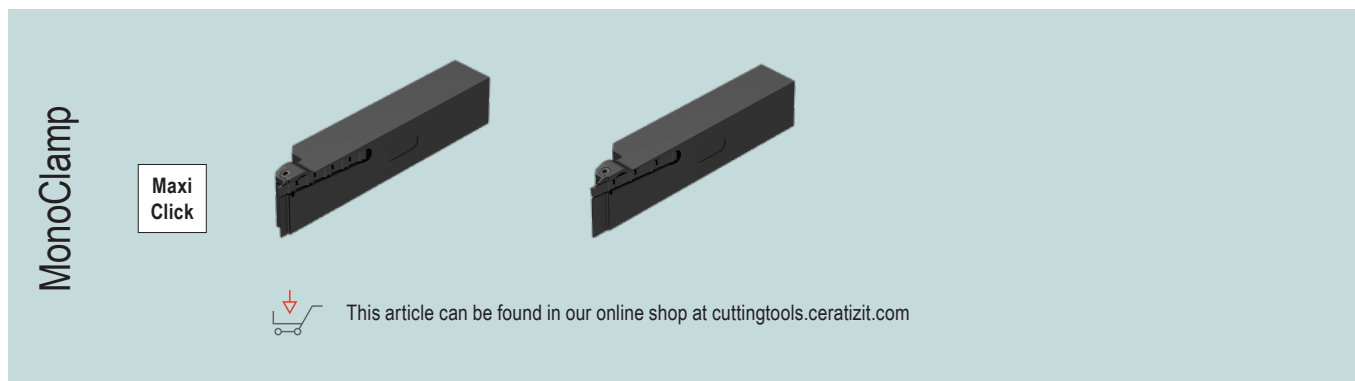

Insert SX

▲ High precision ground geometry

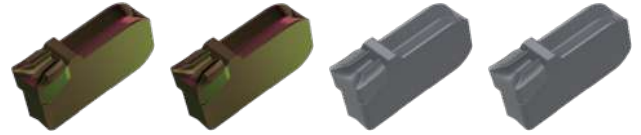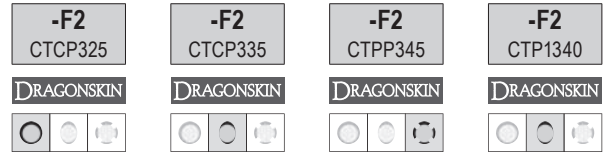

Designation	CW $\pm 0,02$ mm	RE $\pm 0,05$ mm	PDPT mm	for tool holder	70 346 ...		70 346 ...		70 346 ...		70 346 ...	
					£		£		£		£	
SX E2.00 N 0.20	2	0.2	1.5	-SX2	1C/72		1C/72		1C/72		1C/72	
SX E3.00 N 0.30	3	0.3	2.0	-SX3	22.34	923	22.34	523	20.79	822	21.81	622
SX E4.00 N 0.40	4	0.4	2.5	-SX4					22.34	823	23.44	623
									23.65	824	24.81	624

P	●	●	●	●
M	○	○	○	○
K	●	●	●	●
N	○	○	○	○
S	○	○	○	○
H				
O				○

→ v_c Page 103
→ Application recommendation on page 108




Internal machining

External machining



Insert SX

▲ Specially developed geometry with negative edge-chamfers available in right, left and neutral types

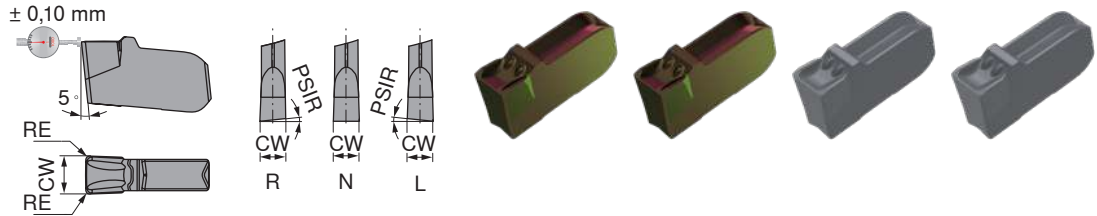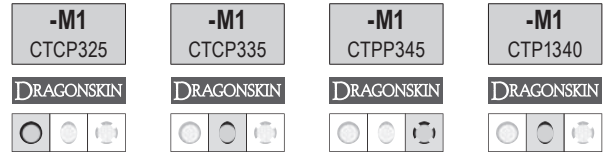

Designation	IH	CW _{+/-0.05} mm	RE _{+/-0.05} mm	PSIR	for tool holder	70 342 ...		70 342 ...		70 342 ...		70 342 ...	
						£	1C/72	£	1C/72	£	1C/72	£	1C/72
SX E2.00 L 6	L	2	0.2	6°	-SX2							13.94	612
SX E3.00 L 6	L	3	0.2	6°	-SX3	14.83	913					14.83	613
SX E4.00 L 6	L	4	0.3	6°	-SX4							15.65	614
SX E2.00 N 0.20	N	2	0.2		-SX2	13.94	922	15.05	52200	13.94	822	14.63	622
SX E3.00 N 0.20	N	3	0.2		-SX3	14.83	923	15.56	523	14.83	823	15.56	623
SX E4.00 N 0.30	N	4	0.3		-SX4	15.65	924	16.42	524	15.65	824	16.42	624
SX E5.00 N 0.30	N	5	0.3		-SX5	16.66	925	18.00	52500	16.66	825	17.47	625
SX E6.00 N 0.40	N	6	0.4		-SX6	17.95	926	19.41	52600	17.95	826	18.83	626
SX E2.00 R 6	R	2	0.2	6°	-SX2							13.94	602
SX E3.00 R 6	R	3	0.2	6°	-SX3	14.83	903					14.83	603
SX E4.00 R 6	R	4	0.3	6°	-SX4							15.65	604
P						●		●		●		●	
M						○		○		●		●	
K						●		●				●	
N												○	
S							○			○		●	
H													
O													○

→ v. Page 103
→ Application recommendation on page 109



Note: reduce feed rate by 20–50 % with R/L version!

You can find more information on page 119

Internal machining	External machining			
	→ 18	→ 19+20	→ 21–24	→ 25+26

Insert SX

▲ All purpose geometry for parting, grooving & turning.



Designation	CW $\pm 0,05$ mm	RE $\pm 0,05$ mm	PDPT mm	for tool holder	70 343 ...		70 343 ...		70 343 ...		70 343 ...	
					£ 1C/72		£ 1C/72		£ 1C/72		£ 1C/72	
SX E2.00 N 0.20	2	0.2	1.5	-SX2	13.94	922	13.94	522	13.94	822	13.94	622
SX E3.00 N 0.30	3	0.3	2.0	-SX3	14.83	923	14.83	523	14.83	823	14.83	623
SX E4.00 N 0.40	4	0.4	2.5	-SX4	15.65	924	15.65	524	15.65	824	15.65	624
SX E5.00 N 0.40	5	0.4	2.7	-SX5	16.66	925	16.66	525	16.66	825	16.66	625
SX E6.00 N 0.50	6	0.5	3.0	-SX6	17.95	926	17.95	526	17.95	826	17.95	626
P					●		●		●		●	
M					○		○		●		●	
K					●		●		●		●	
N												○
S					○				○			●
H												
O												○

→ v_c Page 103
→ Application recommendation on page 108



Internal machining

External machining



Radius Grooving Insert SX

- ▲ for grooving and copy turning
- ▲ very good chip control

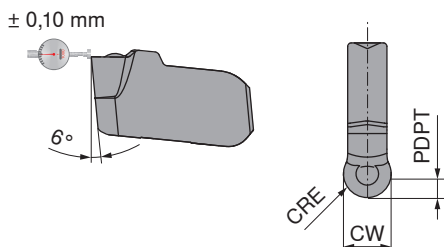

Designation	CW _{+/-0,05} mm	CRE mm	PDPT mm	for tool holder
SX R3.00 N 1.50	3	1.5	1.5	-SX3
SX R4.00 N 2.00	4	2.0	2.0	-SX4
SX R5.00 N 2.50	5	2.5	2.5	-SX5
SX R6.00 N 3.00	6	3.0	3.0	-SX6

70 344 ...		70 344 ...	
£		£	
1C/72		1C/72	
15.77	531	15.77	631
16.66	532	16.66	632
17.59	533	17.59	633
		19.11	634



P	●	●
M	○	●
K	●	●
N		○
S		●
H		
O		○

→ v_c Page 103
→ Application recommendation on page 109

Internal machining		External machining			
		→ 18	→ 19+20	→ 21-24	→ 25+26

Insert SX

▲ For grooving and parting off in steel at medium to high feed rates



NEW

-M7
CTP1340

DRAGONSKIN



70 347 ...

Designation	CW $\pm 0,05$ mm	RE $\pm 0,05$ mm	PDPT mm	for tool holder	£ 1C/72	
SX E2.00 N 0.20	2	0.2	1.5	-SX2	15.05	62200
SX E3.00 N 0.20	3	0.2	2.0	-SX3	16.03	62300
SX E4.00 N 0.30	4	0.3	2.5	-SX4	16.90	62400
SX E5.00 N 0.30	5	0.3	2.7	-SX5	18.00	62500
SX E6.00 N 0.40	6	0.4	3.0	-SX6	19.41	62600

P	●
M	●
K	●
N	○
S	●
H	
O	○

→ v_c Page 103
→ Application recommendation on page 108




Internal machining

External machining

	→ 18	→ 19+20	→ 21-24	→ 25+26			

Insert SX

- ▲ Ground geometry
- ▲ First choice for the grooving and parting off of stainless steel



NEW

-M8
CTP1340

DRAGONSKIN



70 348 ...

Designation	CW	RE	PDPT	for tool holder
	<small>+/-0,05</small> mm	<small>+/-0,05</small> mm	mm	
SX E2.00 N 0.20	2	0.2	1.5	-SX2
SX E3.00 N 0.20	3	0.2	2.0	-SX3
SX E4.00 N 0.30	4	0.3	2.5	-SX4
SX E5.00 N 0.30	5	0.3	2.7	-SX5
SX E6.00 N 0.40	6	0.4	3.0	-SX6

£	
1C/72	
22.47	62200
24.16	62300
25.55	62400
27.20	62500
29.33	62600

P	●
M	●
K	●
N	○
S	●
H	
O	○

→ v_c Page 103
→ Application recommendation on page 108




Internal machining

External machining



Insert SX

- ▲ Insert with highly positive cutting edge geometry and sharp cutting edge
- ▲ Specialist for aluminum and other soft long-chipping non-ferrous metals



Designation	CW $\pm 0,02$ mm	RE $\pm 0,05$ mm	PDPT mm	for tool holder
SX E2.00 N 0.20	2	0.2	2.0	-SX2
SX E3.00 N 0.30	3	0.3	2.5	-SX3
SX E4.00 N 0.40	4	0.4	3.0	-SX4

70 349 ...
£
1C/72
17.34 122
18.57 123
19.65 124

P	
M	
K	●
N	●
S	○
H	
O	○

→ v_c Page 103
→ Application recommendation on page 109

Internal machining

External machining




ModularClamp MSS – Radial grooving module SX

▲ for parting, grooving and finish turning

Scope of supply:

Grooving module only

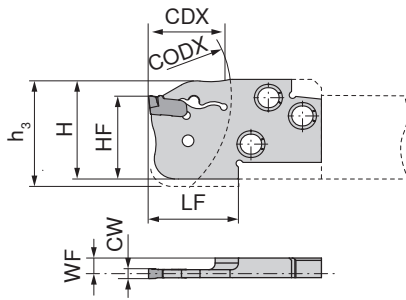

Illustrations show right-hand versions




ISO designation	HF mm	CW mm	WF mm	LF mm	H mm	h ₃ mm	CODX mm	CDX mm	for grooving inserts	Left-hand	Right-hand		
										70 897 ...	70 896 ...		
										£ 2C/71	£ 2C/71		
E20 R/L 20-SX2	20	2	3.57	22	24	27	60	20	SX 2..	99.14	020	99.14	020
E20 R/L 20-SX3	20	3	3.20	22	24	27	60	20	SX 3..	99.14	120	99.14	120
E25 R/L 20-SX2	25	2	5.07	22	30		75	20	SX 2..	99.87	025	99.87	025
E25 R/L 25-SX3	25	3	4.70	27	30		75	25	SX 3..	99.87	125	99.87	125
E25 R/L 35-SX3	25	3	4.70	37	30		75	35	SX 3..	100.83	225	100.83	225
E25 R/L 25-SX4	25	4	4.30	27	30		75	25	SX 4..	99.87	325	99.87	325
E25 R/L 35-SX4	25	4	4.30	37	30		75	35	SX 4..	100.83	425	100.83	425



Ejector SX

**Spare parts
for grooving inserts**

		£	
SX 2..	SX 2-3	32.20	836
SX 3..	SX 2-3	32.20	836
SX 4..	SX 4-6	32.84	837



→ 11-17

→ 95+96


→ 97

 Please order SX assembly key separately if required.


MonoClamp – Radial Blade SX-DC Standard

Scope of supply:

Blade incl. 1 sealing screw

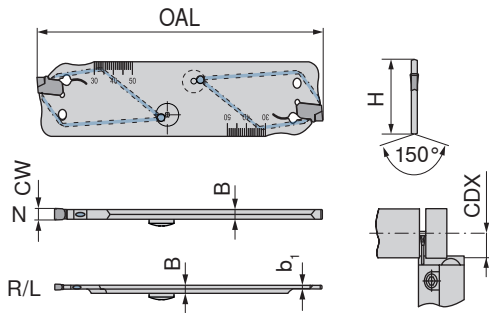


ISO designation	CW mm	H mm	B mm	b ₁ mm	OAL mm	CDX mm	for grooving inserts	R/L/N	70 884 ...	
									£	
XLCF L 2602-DC-SX2	2	26	2.4	1.6	110	25	SX .2..	L	174.32	712
XLCF R 2602-DC-SX2	2	26	2.4	1.6	110	25	SX .2..	R	174.32	512
XLCF N 2603-DC-SX3	3	26	2.5		110	35	SX .3..	N	174.32	613
XLCF N 2604-DC-SX4	4	26	3.3		110	40	SX .4..	N	174.32	614
XLCF L 3202-DC-SX2	2	32	2.4	1.6	150	26	SX .2..	L	188.88	702
XLCF R 3202-DC-SX2	2	32	2.4	1.6	150	26	SX .2..	R	188.88	502
XLCF N 3203-DC-SX3	3	32	2.5		150	50	SX .3..	N	188.88	603
XLCF N 3204-DC-SX4	4	32	3.3		150	50	SX .4..	N	188.88	604
XLCF N 3205-DC-SX5	5	32	4.3		150	55	SX .5..	N	188.88	605
XLCF N 3206-DC-SX6	6	32	5.2		150	60	SX .6..	N	188.88	606



Key D



Ejector SX



Sealing screw

Spare parts for grooving inserts	80 950 ...		70 950 ...		70 950 ...	
	£		£		£	
SX .2..	Y7		2A/28		2A/28	
SX .3..	20.03	128	32.20	836	14.89	450
SX .4..	20.03	128	32.84	837	14.89	450
SX .5..	20.03	128	32.84	837	14.89	450
SX .6..	20.03	128	32.84	837	14.89	450



→ 11-17	→ 99	→ Chapter 16	→ Chapter 16					
---------	------	--------------	--------------	--	--	--	--	--





Please order SX assembly key separately if required.

MonoClamp – Radial Blade SX Standard

Scope of supply:

Blade only

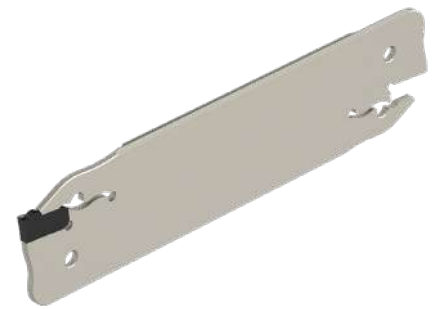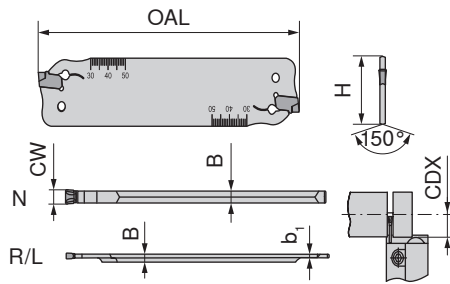

ISO designation	CW mm	H mm	B mm	b ₁ mm	OAL mm	CDX mm	for grooving inserts	R/L/N
XLCF L 2602-SX2	2	26	2.4	1.5	110	25	SX .2..	L
XLCF R 2602-SX2	2	26	2.4	1.5	110	25	SX .2..	R
XLCF N 2603-SX3	3	26	2.4		110	35	SX .3..	N
XCLF N 2604-SX4	4	26	3.2		110	40	SX .4..	N
XLCF L 3202-SX2	2	32	2.4	1.5	150	25	SX .2..	L
XLCF R 3202-SX2	2	32	2.4	1.5	150	25	SX .2..	R
XLCF N 3203-SX3	3	32	2.4		150	50	SX .3..	N
XLCF N 3204-SX4	4	32	3.2		150	50	SX .4..	N
XLCF N 3205-SX5	5	32	4.2		150	55	SX .5..	N
XLCF N 3206-SX6	6	32	5.2		150	60	SX .6..	N

70 884 ...

£	
2A/25	
102.16	212
102.16	012
102.16	113
102.16	114
106.89	202
106.89	002
106.89	103
106.89	104
106.89	105
106.89	106



Ejector SX

Spare parts
for grooving inserts

		£	
SX .2..	SX 2-3	32.20	836
SX .3..	SX 2-3	32.20	836
SX .4..	SX 4-6	32.84	837
SX .5..	SX 4-6	32.84	837
SX .6..	SX 4-6	32.84	837

70 950 ...

£	
2A/28	



→ 11-17

→ 100+101

→ Chapter 16


→ Chapter 16

Please order SX assembly key separately if required.


MonoClamp – Radial Blade SX-DC reinforced

Scope of supply:

Blade only

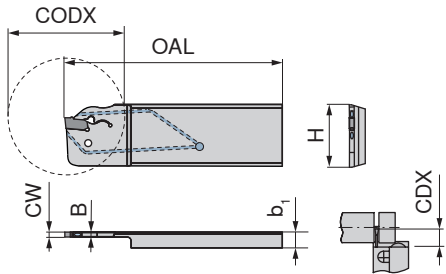

Illustrations show right-hand versions

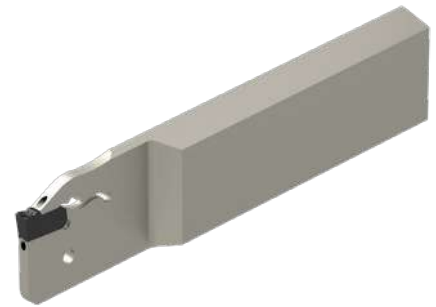

ISO designation	CW mm	H mm	B mm	b ₁ mm	OAL mm	CODX mm	CDX mm	for grooving inserts	R/L/N	70 879 ...
XLCF L 2608-DC-SX3	3	26	2.5	8	110	66	33	SX .3..	L	£ 2A/25 174.32 713
XLCF R 2608-DC-SX3	3	26	2.5	8	110	66	33	SX .3..	R	£ 174.32 513
XLCF L 3208-DC-SX3	3	32	2.5	8	110	66	33	SX .3..	L	£ 188.88 703
XLCF R 3208-DC-SX3	3	32	2.5	8	110	66	33	SX .3..	R	£ 188.88 503



Spare parts
for grooving inserts

Spare parts for grooving inserts	70 950 ...
SX .3..	£ 2A/28 32.20 836
SX .4..	£ 32.84 837





→ 11-17

→ 99

→ Chapter 16

→ Chapter 16

Correct Tool Selection

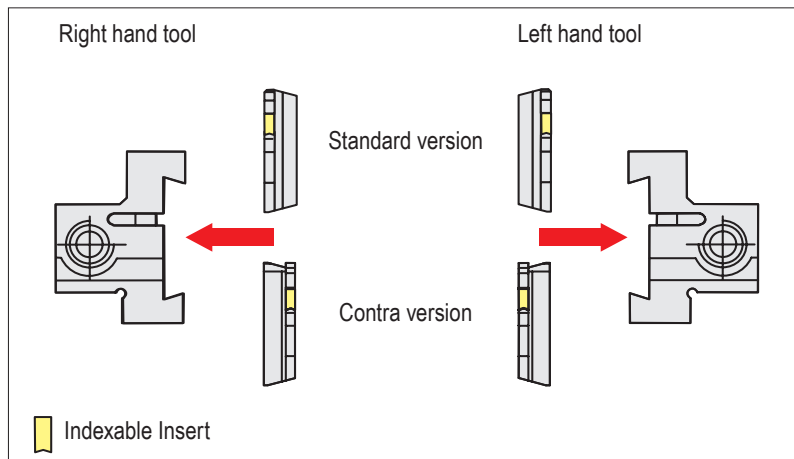


Please order SX assembly key separately if required.

MonoClamp – Radial Blade SX reinforced

Scope of supply:

Blade only

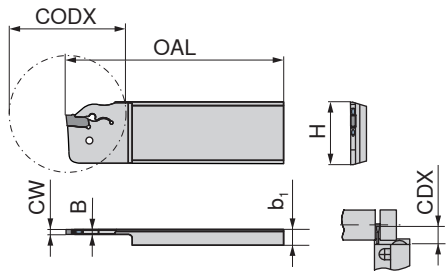

Illustrations show right-hand versions



ISO designation	CW mm	H mm	B mm	b ₁ mm	OAL mm	CODX mm	CDX mm	for grooving inserts	R/L/N
XLCF L 2608-SX3	3	26	2.5	8	110	44	22	SX .3..	L
XLCF R 2608-SX3	3	26	2.5	8	110	44	22	SX .3..	R
XLCF L 3208-SX3	3	32	2.5	8	110	66	33	SX .3..	L
XLCF R 3208-SX3	3	32	2.5	8	110	66	33	SX .3..	R
XLCF L 3208-SX4	4	32	3.4	8	110	66	33	SX .4..	L
XLCF R 3208-SX4	4	32	3.4	8	110	66	33	SX .4..	R

70 879 ...

£	
2A/25	
156.42	213 ¹⁾
156.42	013 ¹⁾
147.08	203
147.08	003
147.08	204
147.08	004

1) can be used in both directions



Ejector SX

Spare parts for grooving inserts

		£	
SX .3..	SX 2-3	32.20	836
SX .4..	SX 4-6	32.84	837

70 950 ...




→ 11-17

→ 100+101

→ Chapter 16


→ Chapter 16

 Please order SX assembly key separately if required.


MonoClamp – SX-DC reinforced Contra radial blade

Scope of supply:

Blade only

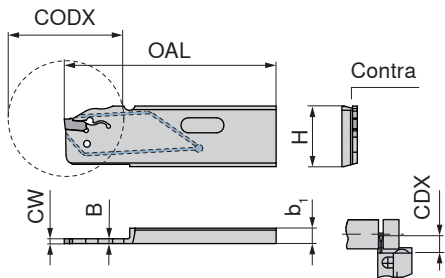

Illustrations show right-hand versions

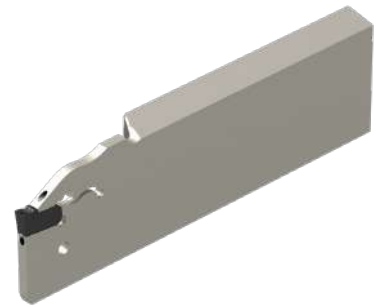

ISO designation	CW mm	H mm	B mm	b ₁ mm	OAL mm	CODX mm	CDX mm	for grooving inserts	Version	R/L/N	70 877 ...
XLCF L 3208C-DC-SX3	3	32	2.5	8	110	66	33	SX .3..	Contra	L	£ 2A/25 188.88 703
XLCF R 3208C-DC-SX3	3	32	2.5	8	110	66	33	SX .3..	Contra	R	£ 2A/25 188.88 503





Spare parts
for grooving inserts
SX .3..

70 950 ...
£ 2A/28 32.20 836
SX 2-3



→ 11-17 → 99 → Chapter 16 → Chapter 16


Correct Tool Selection

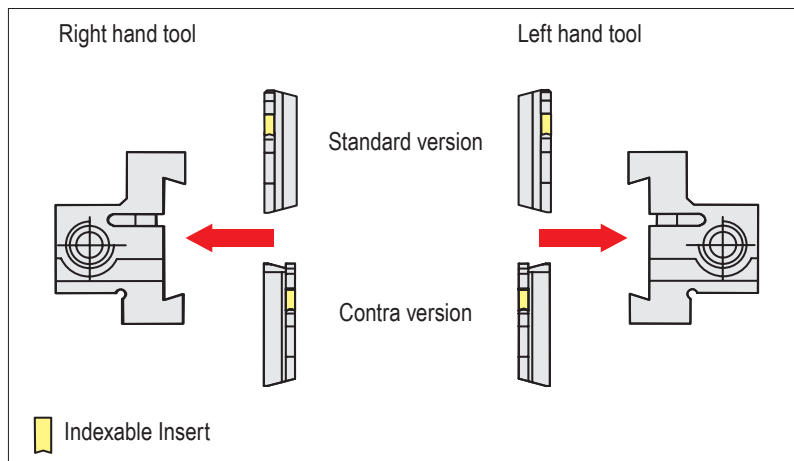

Please order SX assembly key separately if required.

MonoClamp – SX reinforced Contra radial blade

Scope of supply:
Blade only

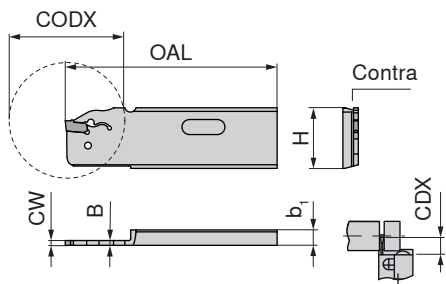

Illustrations show right-hand versions

ISO designation	CW mm	H mm	B mm	b ₁ mm	OAL mm	CODX mm	CDX mm	for grooving inserts	Version	R/L/N
XLCF L 3208C-SX3	3	32	2.5	8	110	66	33	SX .3..	Contra	L
XLCF R 3208C-SX3	3	32	2.5	8	110	66	33	SX .3..	Contra	R

70 877 ...

£

2A/25

147.08 203

147.08 003

Spare parts
for grooving inserts
SX .3..



Ejector SX

70 950 ...

£

2A/28

SX 2-3

32.20 836



→ 11-17

→ 100+101

→ Chapter 16


→ Chapter 16

Please order SX assembly key separately if required.


MonoClamp – Radial Monoholder SX-DC

Scope of supply:

Mono holder incl. screw plug and grub screw

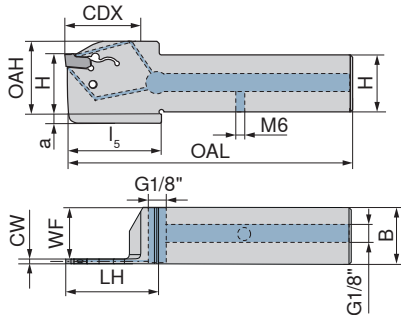


Illustrations show right-hand versions

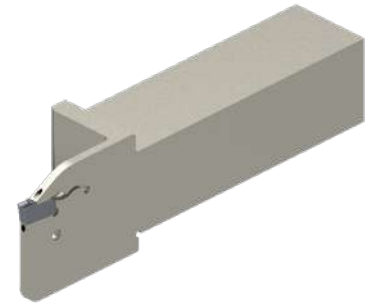

ISO designation	H mm	B mm	CW mm	WF mm	OAL mm	LH mm	I ₅ mm	OAH mm	CDX mm	a mm	for grooving inserts	Left-hand		Right-hand	
												70 847 ...	21201	70 847 ...	21200
E12 R/L 0022-1212X-K-DC-SX2	12	12	2	11.20	71	27	28	22	22	5	SX .2..	£ 2C/71 168.66	21201	£ 2C/71 168.66	21200
E16 R/L 0026-1616X-K-DC-SX2	16	16	2	15.20	87	32	33	26	26	4	SX .2..	£ 178.24	21601	£ 178.24	21600
E16 R/L 0026-1616X-K-DC-SX3	16	16	3	14.75	87	32	33	26	26	4	SX .3..	£ 178.24	31601	£ 178.24	31600
E20 R/L 0026-2020X-K-DC-SX2	20	20	2	19.20	102	32	33	31	26	5	SX .2..	£ 201.91	22001	£ 201.91	22000
E20 R/L 0026-2020X-K-DC-SX3	20	20	3	18.75	102	32	33	31	26	5	SX .3..	£ 201.91	32001	£ 201.91	32000
E20 R/L 0033-2020X-K-DC-SX4	20	20	4	18.30	109	39	40	32	33	5	SX .4..	£ 201.91	42001	£ 201.91	42000
E25 R/L 0033-2525X-K-DC-SX2	25	25	2	24.20	126	41	42	36	33	5	SX .2..	£ 217.38	22501	£ 217.38	22500
E25 R/L 0026-2525X-K-DC-SX3	25	25	3	23.75	117	33		31	26		SX .3..	£ 217.38	32501	£ 217.38	32500
E25 R/L 0033-2525X-K-DC-SX3	25	25	3	23.75	126	41	42	36	33	5	SX .3..	£ 217.38	32601	£ 217.38	32600
E25 R/L 0033-2525X-K-DC-SX4	25	25	4	23.30	126	41	42	36	33	5	SX .4..	£ 217.38	42501	£ 217.38	42500
E25 R/L 0040-2525X-K-DC-SX4	25	25	4	23.30	133	48	49	38	40	6	SX .4..	£ 217.38	42601	£ 217.38	42600
E25 R/L 0040-2525X-K-DC-SX5	25	25	5	22.85	133	48	49	38	40	6	SX .5..	£ 217.38	52501	£ 217.38	52500
E25 R/L 0040-2525X-K-DC-SX6	25	25	6	22.35	133	48	49	38	40	6	SX .6..	£ 217.38	62501	£ 217.38	62500

Spare parts for grooving inserts	Ejector SX		Coolant screw plug		Grubscrew	
	70 950 ...	£ 2A/28	70 950 ...	£ 2A/28	70 950 ...	£ 2A/28
SX .2..	SX 2-3	32.20 836	G 1/8"	4.11 294	M6x6	3.35 86700
SX .3..	SX 2-3	32.20 836	G 1/8"	4.11 294	M6x6	3.35 86700
SX .4..	SX 4-6	32.84 837	G 1/8"	4.11 294	M6x6	3.35 86700
SX .5..	SX 4-6	32.84 837	G 1/8"	4.11 294	M6x6	3.35 86700
SX .6..	SX 4-6	32.84 837	G 1/8"	4.11 294	M6x6	3.35 86700





→ 11-17 → Chapter 16

Please order SX assembly key separately if required.

MonoClamp – Radial Monoholder SX

Scope of supply:

Mono holder only

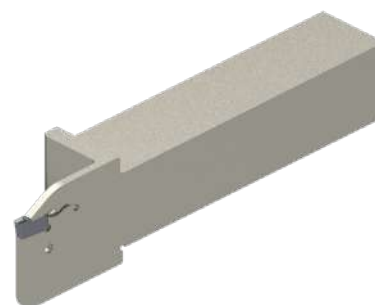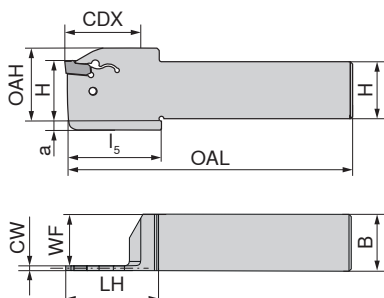

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAL mm	LH mm	l ₅ mm	OAH mm	CDX mm	a mm	for grooving inserts	Left-hand	Right-hand		
												70 846 ...	70 846 ...		
												£	£		
												2C/71	2C/71		
E12 R/L 0022-1212K-K-SX2	12	12	2	11.20	125	27	28	22	22	5	SX .2..	114.03	21201	114.03	21200
E16 R/L 0026-1616K-K-SX2	16	16	2	15.20	125	32	33	26	26	4	SX .2..	116.37	21601	116.37	21600
E16 R/L 0026-1616K-K-SX3	16	16	3	14.75	125	32	33	26	26	4	SX .3..	116.37	31601	116.37	31600
E20 R/L 0026-2020K-K-SX2	20	20	2	19.20	125	32	33	31	26	5	SX .2..	136.58	22001	136.58	22000
E20 R/L 0026-2020K-K-SX3	20	20	3	18.75	125	32	33	31	26	5	SX .3..	136.58	32001	136.58	32000
E20 R/L 0033-2020K-K-SX4	20	20	4	18.30	125	39	40	32	33	5	SX .4..	136.58	42001	136.58	42000
E25 R/L 0033-2525M-K-SX2	25	25	2	24.20	150	41	42	36	33	5	SX .2..	144.87	22501	144.87	22500
E25 R/L 0033-2525M-K-SX3	25	25	3	23.75	150	41	42	36	33	5	SX .3..	144.87	32601	144.87	32600
E25 R/L 0026-2525M-K-SX3	25	25	3	23.75	150	33		31	26		SX .3..	144.87	32501	144.87	32500
E25 R/L 0040-2525M-K-SX4	25	25	4	23.30	150	48	49	38	40	6	SX .4..	144.87	42601	144.87	42600
E25 R/L 0033-2525M-K-SX4	25	25	4	23.30	150	41	42	37	33	5	SX .4..	144.87	42501	144.87	42500
E25 R/L 0040-2525M-K-SX5	25	25	5	22.85	150	48	49	38	40	6	SX .5..	144.87	52501	144.87	52500
E25 R/L 0040-2525M-K-SX6	25	25	6	22.35	150	48	49	38	40	6	SX .6..	144.87	62501	144.87	62500



Spare parts for grooving inserts

		£	
		2A/28	
SX .2..	SX 2-3	32.20	836
SX .3..	SX 2-3	32.20	836
SX .4..	SX 4-6	32.84	837
SX .5..	SX 4-6	32.84	837
SX .6..	SX 4-6	32.84	837







→ 11-17 → Chapter 16

Please order SX assembly key separately if required.

Insert FX


- ▲ Excellent cutting geometry with low cutting forces
- ▲ Very good swarf control also with low feed rates
- ▲ Reduced built-up edge

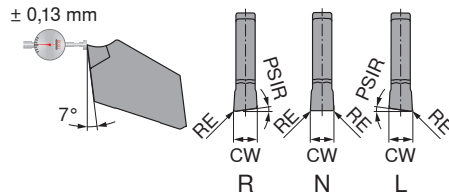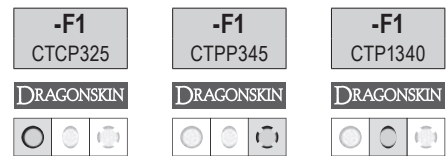

Designation	IH	CW _{-0,1} mm	RE _{+/-0,05} mm	PSIR	for tool holder	70 331 ...		70 331 ...		70 331 ...	
						£ 1A/15		£ 1A/15		£ 1A/15	
FX 2.2 L 5-F1	L	2.2	0.15	5°	-FX 2.2			15.90	847	15.90	647
FX 3.1 L 5-F1	L	3.1	0.20	5°	-FX 3.1			15.90	851	15.90	651
FX 3.1 L 8-F1	L	3.1	0.20	8°	-FX 3.1			15.90	855		
FX 2.2 N 0.15-F1	N	2.2	0.15		-FX 2.2	15.90	998	15.90	848	15.90	648
FX 3.1 N 0.40-F1	N	3.1	0.40		-FX 3.1	15.90	906	15.90	856	15.90	656
FX 3.1 N 0.20-F1	N	3.1	0.20		-FX 3.1	15.90	902	15.90	852	15.90	652
FX 4.1 N 0.20-F1	N	4.1	0.20		-FX 4.1			17.06	860	17.06	660
FX 4.1 N 0.50-F1	N	4.1	0.50		-FX 4.1			17.06	864		
FX 2.2 R 5-F1	R	2.2	0.15	5°	-FX 2.2			15.90	849	15.90	649
FX 3.1 R 5-F1	R	3.1	0.20	5°	-FX 3.1			15.90	853	15.90	653
FX 3.1 R 8-F1	R	3.1	0.20	8°	-FX 3.1			15.90	857		
P								●	●	●	
M								○	●	●	
K								●			
N											○
S								○	○		●
H											
O											○




→ v_c Page 103
→ Application recommendation on page 110

Note: reduce feed rate by 20–50 % with R/L version!

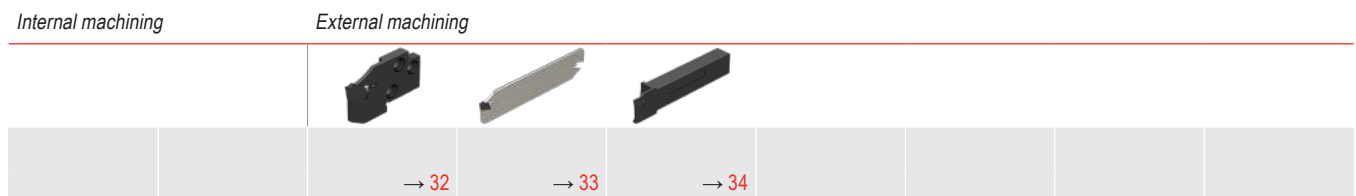

Insert FX

▲ narrow version

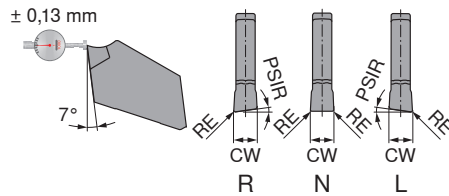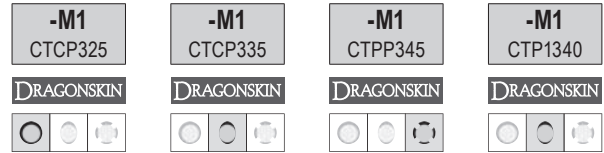

Designation	IH	CW _{-0.1} mm	RE _{±0.05} mm	PSIR	for tool holder	70 330 ...		70 330 ...		70 330 ...		70 330 ...	
						£		£		£		£	
FX 2.2 L 4-M1	L	2.2	0.1	5°	-FX 2.2	1A/15		1A/15	550	1A/15	800	1A/15	600
FX 2.2 N 0.10-M1	N	2.2	0.1		-FX 2.2	15.90	902	15.90	552	15.90	802	15.90	602
FX 2.2 R 4-M1	R	2.2	0.1	4°	-FX 2.2			15.90	554	15.90	804	15.90	604
P						●		●		●		●	
M						○		○		●		●	
K						●		●		●		●	
N													○
S							○				○		●
H													
O													○

→ v_c Page 103
→ Application recommendation on page 110

1 Note: reduce feed rate by 20–50 % with R/L version!

Internal machining

External machining







→ 32

→ 33

→ 34

Insert FX

▲ wide version

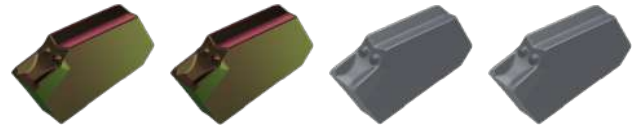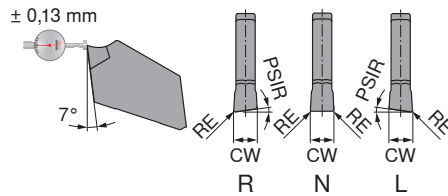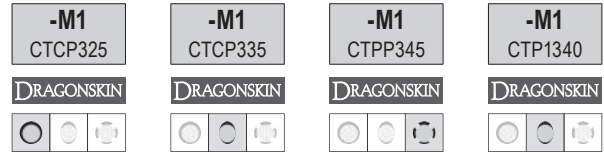

Designation	IH	CW <small>±0,05</small> mm	RE <small>±0,05</small> mm	PSIR	for tool holder	70 332 ...		70 332 ...		70 332 ...		70 332 ...	
						£	1A/15	£	1A/15	£	1A/15	£	1A/15
FX 3.1 L 6-M1	L	3.1	0.15	6°	-FX 3.1	15.90	900	15.90	550	15.90	800	15.90	600
FX 4.1 L 6-M1	L	4.1	0.20	6°	-FX 4.1	17.06	908	17.06	556	17.06	806	17.06	606
FX 3.1 N 0.15-M1	N	3.1	0.15		-FX 3.1	15.90	902	15.90	552	15.90	802	15.90	602
FX 4.1 N 0.20-M1	N	4.1	0.20		-FX 4.1	17.06	908	17.06	558	17.06	808	17.06	608
FX 5.1 N 0.25-M1	N	5.1	0.25		-FX 5.1	18.23	914	18.23	564	18.23	814	18.23	614
FX 6.5 N 0.30-M1	N	6.5	0.30		-FX 6.5	18.73	920	18.73	570	18.73	820	18.73	620
FX 8.2 N 0.40-M1	N	8.2	0.40		XLCEN 4608	21.31	924	21.31	574			21.31	624
FX 9.7 N 0.40-M1	N	9.7	0.40		XLCEN 4609	30.88	926	30.88	576			30.88	626
FX 3.1 R 6-M1	R	3.1	0.15	6°	-FX 3.1	15.90	904	15.90	554	15.90	804	15.90	604
FX 4.1 R 6-M1	R	4.1	0.20	6°	-FX 4.1	17.06	910	17.06	560	17.06	810	17.06	610

P	●	●	●	●
M	○	○	●	●
K	●	●	●	●
N	●	●	●	○
S	○	○	○	●
H				
O				○

→ v_c Page 103

→ Application recommendation on page 110

Note: reduce feed rate by 20–50 % with R/L version!



Internal machining

External machining





Insert FX

- ▲ Insert with highly positive cutting edge geometry and sharp cutting edge, polished chip breaker
- ▲ Reduced built-up edge



-27P
H216T

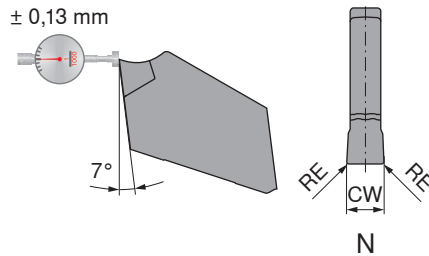

70 334 ...

Designation	IH	CW _{0,1} mm	RE _{±0,05} mm	for tool holder	£	
FX 2.2 N 0.10	N	2.2	0.10	-FX 2.2	1A/90	650
FX 3.1 N 0.15	N	3.1	0.15	-FX 3.1	14.83	652
FX 4.1 N 0.15	N	4.1	0.15	-FX 4.1	15.90	654

P	
M	
K	●
N	●
S	○
H	
O	○

→ v. Page 103
→ Application recommendation on page 110




Internal machining

External machining



Insert FX

- ▲ Insert with excellent swarf control for a wide range of feed rates
- ▲ Very stable cutting edge

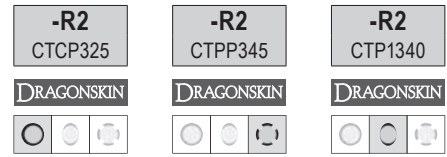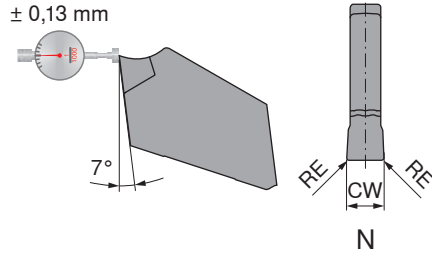

Designation	IH	CW _{-0.1} mm	RE _{+/-0.05} mm	for tool holder	70 335 ...		70 335 ...		70 335 ...	
					£ 1A/15		£ 1A/15		£ 1A/15	
FX 3.1 N 0.40-R2	N	3.1	0.4	-FX 3.1	15.90	902	15.90	852	15.90	652
FX 4.1 N 0.50-R2	N	4.1	0.5	-FX 4.1	17.06	908	17.06	858	17.06	658
P					●		●		●	
M					○		●		●	
K					●				●	
N										○
S					○		○			●
H										
O										○

→ v_c Page 103
→ Application recommendation on page 110


Internal machining

External machining




ModularClamp MSS – Radial grooving module FX short/long

Scope of supply:
Grooving module only



Illustrations show right-hand versions



ISO designation	HF mm	CW mm	WF mm	LF mm	H mm	CODX mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
									70 876 ...	70 875 ...	70 876 ...	70 875 ...
									£		£	
									2C/71		2C/71	
E20 R/L 20-FX 2.2	23	2.2	3.58	22	27	60	20	FX 2.2 ..	99.14	020	99.14	020
E20 R/L 20-FX 3.1	23	3.1	3.20	22	27	60	20	FX 3.1 ..	99.14	120	99.14	120
E20 R/L 20-FX 4.1	23	4.1	2.80	22	27	60	20	FX 4.1 ..	99.14	220	99.14	220
E25 R/L 20-FX 2.2	25	2.2	5.08	22	30	75	20	FX 2.2 ..	99.87	025	99.87	025
E25 R/L 25-FX 3.1	25	3.1	4.70	27	30	75	25	FX 3.1 ..	99.87	125	99.87	125
E25 R/L 35-FX 3.1	25	3.1	4.70	37	30	75	35	FX 3.1 ..	100.83	525	100.83	525
E25 R/L 25-FX 4.1	25	4.1	4.30	27	30	75	25	FX 4.1 ..	99.87	225	99.87	225
E25 R/L 35-FX 4.1	25	4.1	4.30	37	30	75	35	FX 4.1 ..	100.83	625	100.83	625
E25 R/L 25-FX 5.1	25	5.1	3.90	27	30	75	25	FX 5.1 ..	99.87	325	99.87	325
E25 R/L 35-FX 5.1	25	5.1	3.90	37	30	75	35	FX 5.1 ..	100.83	725	100.83	725
E25 R/L 25-FX 6.5	25	6.5	3.30	27	30	75	25	FX 6.5 ..	99.87	425	99.87	425
E25 R/L 35-FX 6.5	25	6.5	3.30	37	30	75	35	FX 6.5 ..	100.83	825	100.83	825



70 950 ...	
£	
2A/28	
5.02	375
5.02	376
5.02	376
5.02	376
5.02	376

Spare parts
for grooving inserts



- FX 2.2 ..
- FX 3.1 ..
- FX 4.1 ..
- FX 5.1 ..
- FX 6.5 ..



→ 27-31	→ 95+96	→ 97							
---------	---------	------	--	--	--	--	--	--	--

MonoClamp – Radial Blade FX

Scope of supply:
Blade and ejector

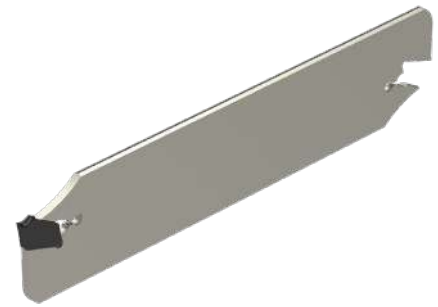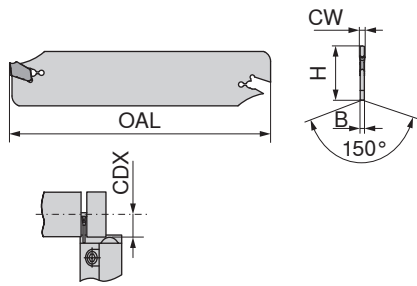

ISO designation	H mm	B mm	OAL mm	CW mm	CDX mm	for grooving inserts
XLCEN 2602 J 22 FX	26	1.65	110	2.2	25	FX 2.2 ..
XLCFN 2603 J 31 FX	26	2.40	110	3.1	35	FX 3.1 ..
XLCFN 2604 J 41 FX	26	3.20	110	4.1	40	FX 4.1 ..
XLCEN 3202 M 22 FX	32	1.65	150	2.2	30	FX 2.2 ..
XLCFN 3203 M 31 FX	32	2.40	150	3.1	50	FX 3.1 ..
XLCFN 3204 M 41 FX	32	3.20	150	4.1	50	FX 4.1 ..
XLCFN 3205 M 51 FX	32	4.00	150	5.1	55	FX 5.1 ..
XLCFN 3206 M 65 FX	32	5.20	150	6.5	55	FX 6.5 ..
XLCEN 4608 S 82 FX	46	6.80	250	8.2	80	FX 8.2 ..
XLCEN 4609 S 97 FX	46	8.00	250	9.7	80	FX 9.7 ..

70 832 ...

£	
2A/25	
93.45	101
94.91	102
102.41	103
93.45	004
94.91	104
102.41	105
112.31	106
121.57	107
290.09	108
290.09	109

Spare parts
for grooving inserts

	£	
FX 2.2 ..	5.02	375
FX 3.1 ..	5.02	376
FX 4.1 ..	5.02	376
FX 5.1 ..	5.02	376
FX 6.5 ..	5.02	376
FX 8.2 ..	6.29	377
FX 9.7 ..	6.29	377



70 950 ...

£	
2A/28	



→ 27-31

→ 100+101



→ Chapter 16

→ Chapter 16

MonoClamp – Radial Monoholder FX

Scope of supply:

Mono holder incl. ejector

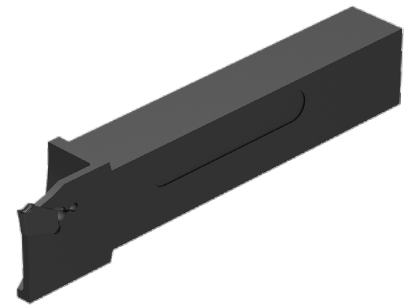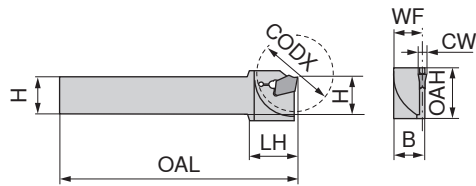

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	OAH mm	CW mm	WF mm	CODX mm	for grooving inserts	Left-hand		Right-hand	
										70 837 ...	70 836 ...		
										£ 2A/25		£ 2A/25	
XLCE R/L 1010 M-FX2.2	10	10	150	19.4	21	2.2	9.18	30	FX 2.2 ..	114.63	101	114.63	101
XLCE R/L 1212 F-FX2.2	12	12	80	21.0	21	2.2	11.18	30	FX 2.2 ..	114.63	102	114.63	102
XLCE R/L 1414 M-FX2.2	14	14	150	19.4	21	2.2	13.18	30	FX 2.2 ..	118.09	104	118.09	104
XLCE R/L 1612 H-FX2.2	16	12	100	21.0	21	2.2	11.18	30	FX 2.2 ..	119.92	105	119.92	105
XLCE R/L 1612 H-FX3.1	16	12	100	21.4	25	3.1	10.80	35	FX 3.1 ..	119.92	106	119.92	106
XLCE R/L 2016 K-FX3.1	20	16	125	26.4	26	3.1	14.80	40	FX 3.1 ..	121.57	107	121.57	107
XLCE R/L 2016 K-FX4.1	20	16	125	26.4	26	4.1	14.40	40	FX 4.1 ..	121.57	109	121.57	109
XLCE R/L 2520 M-FX3.1	25	20	150	35.2	34	3.1	18.80	50	FX 3.1 ..	124.90	108	124.90	108
XLCE R/L 2520 M-FX4.1	25	20	150	35.2	34	4.1	18.40	50	FX 4.1 ..	124.90	110	124.90	110



Ejector

Spare parts
for grooving inserts



	£	
FX 2.2 ..	5.02	375
FX 3.1 ..	5.02	376
FX 4.1 ..	5.02	376



→ 27-31 → Chapter 16

Insert GX 09/16

- ▲ Insert with ground periphery
- ▲ Suitable also for parting off tubes and thin-walled workpieces




Designation	INSL mm	CW $\pm 0,02$ mm	RE $\pm 0,05$ mm	PDPT mm	for tool holder	70 360 ...	
						£	
GX 09-1 E2.00 N 0.20	9	2.0	0.2	1.5	GX 09-1	29.91	600
GX 09-1 E2.50 N 0.20	9	2.5	0.2	1.5	GX 09-1	29.91	602
GX 09-2 E3.00 N 0.30	9	3.0	0.3	2.0	GX 09-2	29.91	604
GX 16-1 E2.00 N 0.20	16	2.0	0.2	2.5	GX 16-1	30.41	650
GX 16-2 E3.00 N 0.30	16	3.0	0.3	3.0	GX 16-2	30.41	652
GX 16-3 E4.00 N 0.40	16	4.0	0.4	3.5	GX 16-3	33.30	654
GX 16-3 E5.00 N 0.40	16	5.0	0.4	3.5	GX 16-3	33.30	656

P	●
M	●
K	●
N	○
S	●
H	
O	○

→ v. Page 103
→ Application recommendation on page 105


Internal machining

External machining

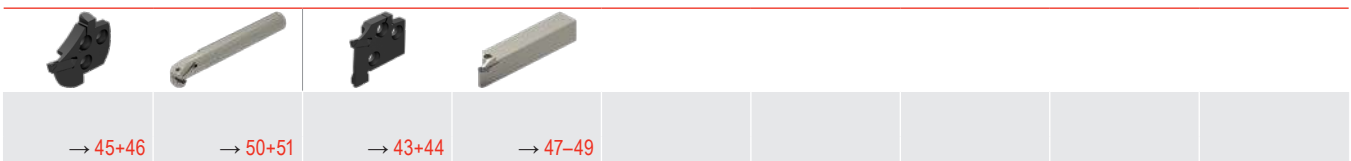

Insert GX 09/16 – Standard

▲ Suitable for parting thin-walled workpieces




Designation	INSL mm	CW mm	RE mm	PDPT mm	for tool holder	70 350 ...		70 350 ...		70 350 ...	
						£		£		£	
GX 09-1 E2.00 N 0.20	9	2.0	0.2	1.5	GX 09-1	29.91	984			29.91	634
GX 09-1 E2.50 N 0.20	9	2.5	0.2	1.5	GX 09-1	29.91	988			29.91	638
GX 09-2 E3.00 N 0.30	9	3.0	0.3	2.0	GX 09-2	29.91	992			29.91	642
GX 16-1 E2.00 N 0.20	16	2.0	0.2	2.5	GX 16-1	30.41	900	30.41	500	30.41	600
GX 16-1 E2.50 N 0.20	16	2.5	0.2	2.5	GX 16-1	30.41	904	30.41	504	30.41	604
GX 16-2 E3.00 N 0.30	16	3.0	0.3	3.0	GX 16-2	30.41	908	30.41	508	30.41	608
GX 16-2 E3.00 N 0.50	16	3.0	0.5	3.0	GX 16-2	30.41	910				
GX 16-2 E3.50 N 0.30	16	3.5	0.3	3.0	GX 16-2	30.41	912	30.41	512	30.41	612
GX 16-3 E4.00 N 0.40	16	4.0	0.4	3.5	GX 16-3	33.30	916	33.30	516	33.30	616
GX 16-3 E5.00 N 0.40	16	5.0	0.4	3.5	GX 16-3	33.30	924	33.30	524	33.30	624
GX 16-4 E6.00 N 0.50	16	6.0	0.5	4.0	GX 16-4	35.13	928			35.13	628
GX 16-4 E6.00 N 0.80	16	6.0	0.8	4.0	GX 16-4	35.13	930				
P						●		●		●	
M						○		○		●	
K						●		●		●	
N											○
S							○				●
H											
O											○

→ v. Page 103
→ Application recommendation on page 105



Internal machining

External machining

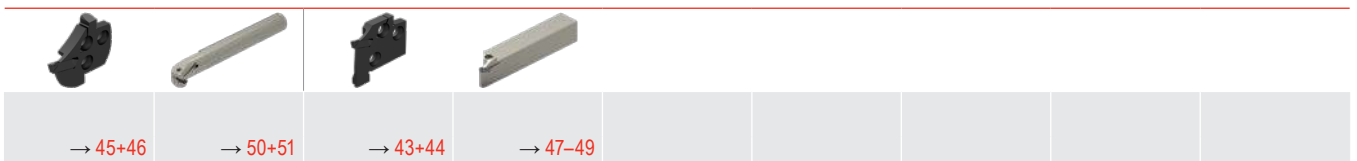

Insert GX 09/16

▲ Very good swarf control

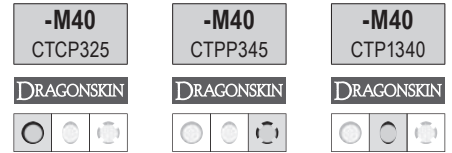


Designation	INSL mm	CW mm	RE mm	PDPT mm	for tool holder	70 351 ...		70 351 ...		70 351 ...	
						£		£		£	
GX 09-1 E2.00 N 0.20	9	2	0.2	1.5	GX 09-1	19.53	986	19.53	886	19.53	686
GX 09-2 E3.00 N 0.30	9	3	0.3	2.0	GX 09-2	19.53	994	19.53	894	19.53	694
GX 16-1 E2.00 N 0.20	16	2	0.2	2.5	GX 16-1	19.79	902	19.79	802	19.79	602
GX 16-2 E3.00 N 0.30	16	3	0.3	3.0	GX 16-2	19.79	910	19.79	810	19.79	610
GX 16-3 E4.00 N 0.40	16	4	0.4	3.5	GX 16-3	22.04	918	22.04	818	22.04	618
GX 16-3 E5.00 N 0.40	16	5	0.4	3.5	GX 16-3	24.27	926	24.27	826	24.27	626
GX 16-4 E6.00 N 0.50	16	6	0.5	4.0	GX 16-4	26.47	930	26.47	830	26.47	630

P	●	●	●
M	○	●	●
K	●	●	●
N	●	●	○
S	○	○	●
H	●	●	●
O	●	●	○

→ v_c Page 103
→ Application recommendation on page 105




Internal machining

External machining

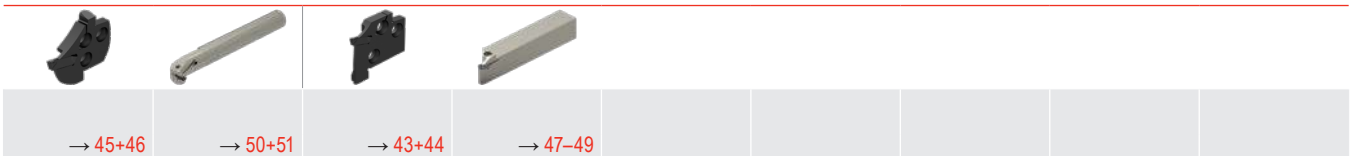

Insert GX 16

▲ Very good swarf control

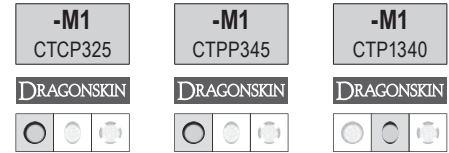


Designation	INSL mm	CW mm	RE mm	PDPT mm	for tool holder	70 362 ...		70 362 ...		70 362 ...	
						£		£		£	
GX 16-1 E2.00 N 0.20	16	2	0.2	2.0	GX 16-1	1C/72		1C/72	800	19.79	600
GX 16-2 E3.00 N 0.20	16	3	0.2	2.5	GX 16-2	19.79	902	19.79	802	19.79	602
GX 16-3 E4.00 N 0.30	16	4	0.3	3.0	GX 16-3	22.04	904	22.04		22.04	604

P	●	●	●
M	○	●	●
K	●		●
N			○
S	○	○	●
H			
O			○

→ v_c Page 103
→ Application recommendation on page 106




Internal machining

External machining

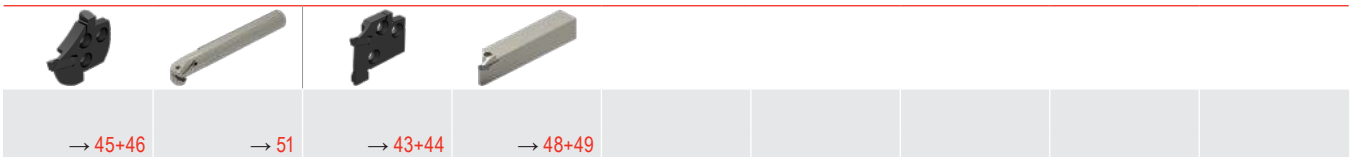

Insert GX 16

- ▲ Insert with highly positive cutting edge geometry and sharp cutting edge
- ▲ ground periphery



Designation	INSL mm	CW $\pm 0,02$ mm	RE $\pm 0,05$ mm	PDPT mm	for tool holder
GX 16-1 E2.00 N 0.20	16	2	0.2	2.5	GX 16-1
GX 16-2 E3.00 N 0.30	16	3	0.3	3.0	GX 16-2
GX 16-3 E4.00 N 0.40	16	4	0.4	3.5	GX 16-3
GX 16-4 E6.00 N 0.50	16	6	0.5	4.0	GX 16-4


70 350 ...
£
1C/72
23.07 650
23.07 658
25.17 670
26.47 678

P	
M	
K	●
N	●
S	○
H	
O	○




→ v_c Page 103
→ Application recommendation on page 105

Internal machining

External machining

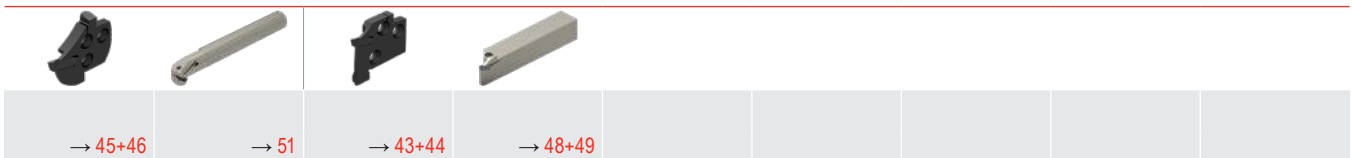

Circlip groove insert GX 09/16 – Standard

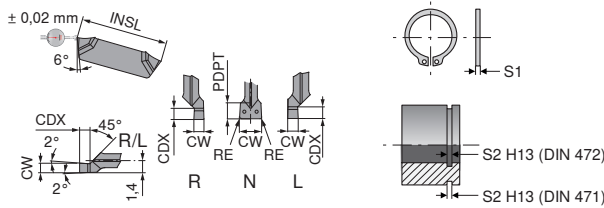


Designation	IH	INSL mm	s ₁ mm	s ₂ mm	CW $\pm 0,02$ mm	RE $\pm 0,05$ mm	CDX mm	PDPT mm	for tool holder	70 352 ...	
										£	624
GX 09-1 S1.00 L	L	9	0.80	0.90	1.00		1.14		R/L 02-GX 09-1	1C/72	684
GX 09-1 S1.20 L	L	9	1.00	1.10	1.20		1.34		R/L 02-GX 09-1	29.91	686
GX 09-1 S1.40 L	L	9	1.20	1.30	1.40		1.53		R/L 02-GX 09-1	29.91	688
GX 09-1 S1.70 L	L	9	1.50	1.60	1.70		1.82		R/L 02-GX 09-1	29.91	690
GX 09-1 S1.95 N	N	9	1.75	1.85	1.95	0.1		2.0	GX 09-1	29.91	692
GX 09-1 S2.25 N	N	9	2.00	2.15	2.25	0.1		2.0	GX 09-1	29.91	694
GX 09-2 S2.75 N	N	9	2.50	2.65	2.75	0.1		2.0	GX 09-2	29.91	696
GX 09-2 S3.25 N	N	9	3.00	3.15	3.25	0.1		2.0	GX 09-2	29.91	698
GX 09-1 S1.00 R	R	9	0.80	0.90	1.00		1.14		R/L 02-GX 09-1	29.91	676
GX 09-1 S1.20 R	R	9	1.00	1.10	1.20		1.34		R/L 02-GX 09-1	29.91	678
GX 09-1 S1.40 R	R	9	1.20	1.30	1.40		1.53		R/L 02-GX 09-1	29.91	680
GX 09-1 S1.70 R	R	9	1.50	1.60	1.70		1.82		R/L 02-GX 09-1	29.91	682
GX 16-2 S0.60 L	L	16	0.40	0.50	0.60		0.75		R/L 03-GX 16-2	30.41	607
GX 16-2 S0.80 L	L	16	0.60	0.70	0.80		0.94		R/L 03-GX 16-2	30.41	609
GX 16-2 S0.90 L	L	16	0.70	0.80	0.90		1.04		R/L 03-GX 16-2	30.41	611
GX 16-2 S1.00 L	L	16	0.80	0.90	1.00		1.14		R/L 03-GX 16-2	30.41	612
GX 16-2 S1.20 L	L	16	1.00	1.10	1.20		1.34		R/L 03-GX 16-2	30.41	614
GX 16-2 S1.40 L	L	16	1.20	1.30	1.40		1.53		R/L 03-GX 16-2	30.41	616
GX 16-2 S1.70 L	L	16	1.50	1.60	1.70		1.82		R/L 03-GX 16-2	30.41	618
GX 16-2 S1.95 L	L	16	1.75	1.85	1.95		2.07		R/L 03-GX 16-2	30.41	620
GX 16-2 S2.25 L	L	16	2.00	2.15	2.25		2.36		R/L 03-GX 16-2	30.41	622
GX 16-2 S2.75 N	N	16	2.50	2.65	2.75	0.1		3.0	GX 16-2	30.41	624
GX 16-2 S3.25 N	N	16	3.00	3.15	3.25	0.1		3.0	GX 16-2	30.41	626
GX 16-3 S4.25 N	N	16	4.00	4.15	4.25	0.2		3.5	GX 16-3	33.30	628
GX 16-2 S0.60 R	R	16	0.40	0.50	0.60		0.75		R/L 03-GX 16-2	30.41	695
GX 16-2 S0.80 R	R	16	0.60	0.70	0.80		0.94		R/L 03-GX 16-2	30.41	697
GX 16-2 S0.90 R	R	16	0.70	0.80	0.90		1.04		R/L 03-GX 16-2	30.41	699
GX 16-2 S1.00 R	R	16	0.80	0.90	1.00		1.14		R/L 03-GX 16-2	30.41	600
GX 16-2 S1.20 R	R	16	1.00	1.10	1.20		1.34		R/L 03-GX 16-2	30.41	602
GX 16-2 S1.40 R	R	16	1.20	1.30	1.40		1.53		R/L 03-GX 16-2	30.41	604
GX 16-2 S1.70 R	R	16	1.50	1.60	1.70		1.82		R/L 03-GX 16-2	30.41	606
GX 16-2 S1.95 R	R	16	1.75	1.85	1.95		2.07		R/L 03-GX 16-2	30.41	608
GX 16-2 S2.25 R	R	16	2.00	2.15	2.25		2.36		R/L 03-GX 16-2	30.41	610
P										●	●
M										●	●
K										●	●
N										○	○
S										●	●
H											
O										○	○

→ v. Page 103
→ Application recommendation on page 105


i Attention - applies only to internal machining:
Right-hand insert → left-hand module or monobloc boring bar
Left-hand insert → right-hand module or monobloc boring bar

Internal machining

External machining

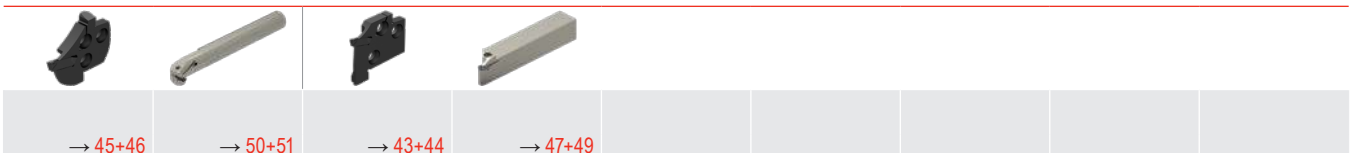

Radius groove insert GX 09/16

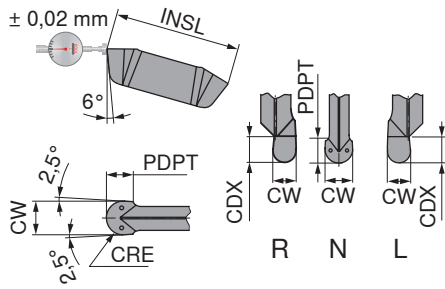


Designation	IH	INSL mm	CW mm	CRE mm	PDPT mm	CDX mm	for tool holder	70 354 ...		70 354 ...		70 354 ...	
								£		£		£	
GX 09-1 R1.00 N	N	9	2.0	1.0	1.0		GX 09-1	1C/72		36.05	992		
GX 09-1 R1.20 N	N	9	2.4	1.2	1.2		GX 09-1			36.05	996		
GX 16-2 R0.80 L	L	16	1.6	0.8		1.78	R/L 03-GX 16-2	36.97	912				
GX 16-2 R1.00 L	L	16	2.0	1.0		2.18	R/L 03-GX 16-2	36.97	916				
GX 16-2 R1.20 L	L	16	2.4	1.2		2.58	R/L 03-GX 16-2	36.97	920				
GX 16-2 R1.50 N	N	16	3.0	1.5	1.5		GX 16-2			36.97	924	36.97	624
GX 16-3 R2.00 N	N	16	4.0	2.0	2.0		GX 16-3			40.13	928	40.13	628
GX 16-3 R2.50 N	N	16	5.0	2.5	2.5		GX 16-3			40.13	932	40.13	632
GX 16-4 R3.00 N	N	16	6.0	3.0	3.0		GX 16-4			41.98	936	41.98	636
GX 16-2 R0.80 R	R	16	1.6	0.8		1.78	R/L 03-GX 16-2	36.97	900				
GX 16-2 R1.00 R	R	16	2.0	1.0		2.18	R/L 03-GX 16-2	36.97	904				
GX 16-2 R1.20 R	R	16	2.4	1.2		2.58	R/L 03-GX 16-2	36.97	908				
P								●	●	●	●	●	●
M								○	○	○	○	○	○
K								●	●	●	●	●	●
N								○	○	○	○	○	○
S								○	○	○	○	○	○
H													
O													○

→ v. Page 103
→ Application recommendation on page 105



11

Attention - applies only to internal machining:
Right-hand insert → left-hand module or monobloc boring bar
Left-hand insert → right-hand module or monobloc boring bar

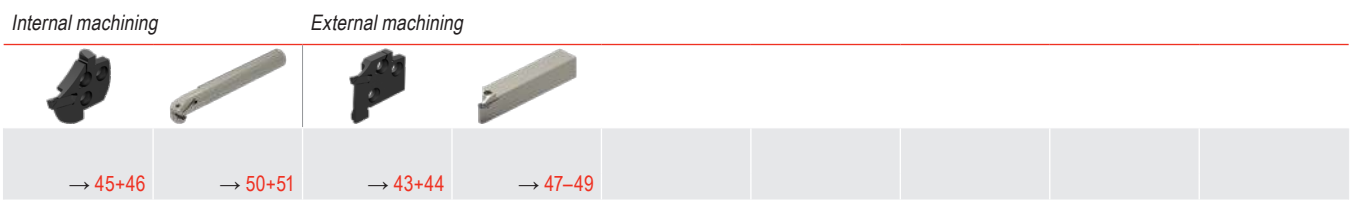

Radius groove insert GX 16

- ▲ Insert with highly positive cutting edge geometry and sharp cutting edge
- ▲ ground periphery



Designation	INSL mm	CW _{+/-0,02} mm	CRE mm	PDPT mm	for tool holder
GX 16-2 R1.50 N	16	3	1.5	1.5	GX 16-2
GX 16-3 R2.00 N	16	4	2.0	2.0	GX 16-3
GX 16-3 R2.50 N	16	5	2.5	2.5	GX 16-3

70 354 ...


£	
1C/72	
27.78	674
30.03	678
30.03	682

P	
M	
K	●
N	●
S	○
H	
O	○

→ v_c Page 103
→ Application recommendation on page 106

Internal machining


External machining

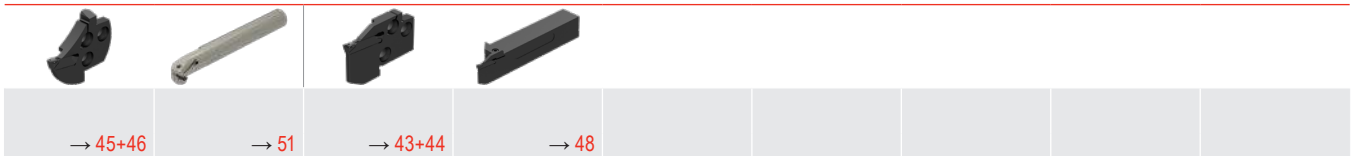

ModularClamp MSS – Radial grooving module GX 09/16

- ▲ For circlip grooves ≤ 2,75 mm
- ▲ For radius grooves up to ≤ 1,2 mm
- ▲ For external recessing

Scope of supply:
Grooving module only



Illustrations show right-hand versions



ISO designation	CW mm	WF mm	LF mm	HF mm	H mm	CODX mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
									70 871 ...	70 870 ...	70 871 ...	70 870 ...
E16 R/L 02-GX 09-1	<1,95	3.15	8	16	19.5	48	2	GX 09-1 ..R/L	£ 2C/71 99.14	116	£ 2C/71 99.14	116
E20 R/L 03-GX 16-2	<2,75	3.40	13	20	24.0	60	3	GX 16-2 ..R/L	99.14	120	99.14	120
E25 R/L 03-GX 16-2	<2,75	4.90	13	25	30.0	75	3	GX 16-2 ..R/L	99.87	125	99.87	125




→ 35-42	→ 95+96	→ 97										
---------	---------	------	--	--	--	--	--	--	--	--	--	--

ModularClamp MSS – Radial grooving module GX 09/16

- ▲ For grooving and turning
- ▲ For circlip grooves ≤ 5,25 mm
- ▲ For radius grooves up to ≤ 2,5 mm
- ▲ For external recessing

Scope of supply:
Grooving module only



Illustrations show right-hand versions



ISO designation	CW mm	WF mm	LF mm	HF mm	H mm	CODX mm	CDX mm	for grooving inserts	Left-hand		Right-hand			
									70 866 ...	£	70 865 ...	£		
E16 R/L 07-GX 09-1	2,00 - 2,75	3.15	8	16	19.5	48	7	GX 09-1 ..N	2C/71	99.14	016	2C/71	99.14	016
E16 R/L 07-GX 09-2	2,76 - 3,75	2.80	8	16	19.5	48	7	GX 09-2 ..N	99.14	116	99.14	99.14	116	
E20 R/L 12-GX 16-1	2,00 - 2,75	3.75	13	20	24.0	60	12	GX 16-1 ..N	99.14	020	99.14	99.14	020	
E20 R/L 12-GX 16-2	2,76 - 3,75	3.40	13	20	24.0	60	12	GX 16-2 ..N	99.14	120	99.14	99.14	120	
E20 R/L 12-GX 16-3	3,76 - 5,00	2.93	13	20	24.0	60	12	GX 16-3 ..N	99.14	220	99.14	99.14	220	
E25 R/L 12-GX 16-1	2,00 - 2,75	5.25	13	25	30.0	75	12	GX 16-1 ..N	99.87	025	99.87	99.87	025	
E25 R/L 12-GX 16-2	2,76 - 3,75	4.90	13	25	30.0	75	12	GX 16-2 ..N	99.87	125	99.87	99.87	125	
E25 R/L 12-GX 16-3	3,76 - 5,00	4.43	13	25	30.0	75	12	GX 16-3 ..N	99.87	225	99.87	99.87	225	
E25 R/L 12-GX 16-4	5,01 - 6,50	3.80	13	25	30.0	75	12	GX 16-4 ..N	99.87	325	99.87	99.87	325	





→ 35-42	→ 95+96	→ 97												
---------	---------	------	--	--	--	--	--	--	--	--	--	--	--	--

ModularClamp MSS – Radial Grooving module GX 09/16 for Internal machining

- ▲ For circlip grooves ≤ 2,75 mm
- ▲ For radius grooves up to ≤ 1,2 mm

Scope of supply:
Grooving module only



Illustrations show right-hand versions

ISO designation	CW mm	LB mm	WF mm	H mm	CDX mm	DMIN mm	for grooving inserts	Left-hand		Right-hand	
								70 886 ...	70 885 ...	£	£
I16 R/L 02-GX 09-1	<1,95	3.8	10.0	16.4	2	20	GX 09-1 ..R/L	2C/71	016	2C/71	016
I20 R/L 02-GX 09-1	<1,95	3.8	12.0	20.3	2	25	GX 09-1 ..R/L	99.14	020	99.14	020
I25 R/L 02-GX 09-1	<1,95	3.8	15.5	24.9	2	32	GX 09-1 ..R/L	99.87	025	99.87	025
I32 R/L 03-GX 16-2	<2,75	5.9	20.0	32.2	3	40	GX 16-2 ..R/L	100.83	032	100.83	032
I40 R/L 03-GX 16-2	<2,75	5.9	24.5	39.6	3	50	GX 16-2 ..R/L	101.67	040	101.67	040

i Right hand module → left hand insert only
Left hand module → right hand insert only





→ 35-42	→ 98									
---------	------	--	--	--	--	--	--	--	--	--

ModularClamp MSS – Radial Grooving module 09/16 for Internal machining

- ▲ For circlip grooves ≤ 5,25 mm
- ▲ For radius grooves up to ≤ 2,5 mm

Scope of supply:
Grooving module only



Illustrations show right-hand versions

ISO designation	CW mm	LB mm	WF mm	H mm	CDX mm	DMIN mm	for grooving inserts	Left-hand		Right-hand	
								70 881 ...	70 880 ...	£	£
I16 R/L 04-GX 09-1	2,00 - 2,75	3.8	10.0	16.4	4	20	GX 09-1 ..N	99.14	017	99.14	017
I16 R/L 04-GX 09-2	2,76 - 3,75	3.8	10.0	16.4	4	20	GX 09-2 ..N	99.14	117	99.14	117
I20 R/L 05-GX 09-1	2,00 - 2,75	3.8	12.0	20.3	5	25	GX 09-1 ..N	99.14	021	99.14	021
I20 R/L 05-GX 09-2	2,76 - 3,75	3.8	12.0	20.3	5	25	GX 09-2 ..N	99.14	121	99.14	121
I25 R/L 06-GX 09-1	2,00 - 2,75	3.8	15.5	24.9	6	32	GX 09-1 ..N	99.87	026	99.87	026
I25 R/L 06-GX 09-2	2,76 - 3,75	3.8	15.5	24.9	6	32	GX 09-2 ..N	99.87	126	99.87	126
I32 R/L 09-GX 16-1	2,00 - 2,75	5.9	20.0	32.2	9	40	GX 16-1 ..N	100.83	033	100.83	033
I32 R/L 09-GX 16-2	2,76 - 3,75	5.9	20.0	32.2	9	40	GX 16-2 ..N	100.83	133	100.83	133
I32 R/L 09-GX 16-3	3,76 - 5,00	5.9	20.0	32.2	9	40	GX 16-3 ..N	100.83	233	100.83	233
I32 R/L 09-GX 16-4	5,01 - 6,50	5.9	20.0	32.2	9	40	GX 16-4 ..N	100.83	333	100.83	333
I40 R/L 10-GX 16-1	2,00 - 2,75	5.9	24.5	39.6	10	50	GX 16-1 ..N	101.67	041	101.67	041
I40 R/L 10-GX 16-2	2,76 - 3,75	5.9	24.5	39.6	10	50	GX 16-2 ..N	101.67	141	101.67	141
I40 R/L 10-GX 16-3	3,76 - 5,00	5.9	24.5	39.6	10	50	GX 16-3 ..N	101.67	241	101.67	241
I40 R/L 10-GX 16-4	5,01 - 6,50	5.9	24.5	39.6	10	50	GX 16-4 ..N	101.67	341	101.67	341





→ 35-42

→ 98

MonoClamp – Radial Monoholder GX 09

Scope of supply:


Mono holder incl. Torx key and clamping screw

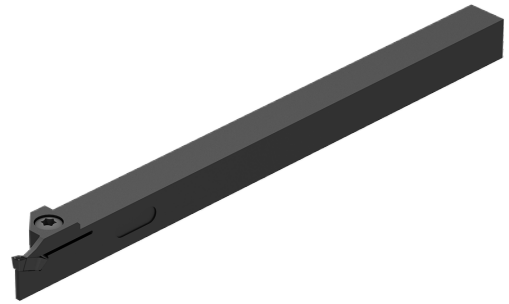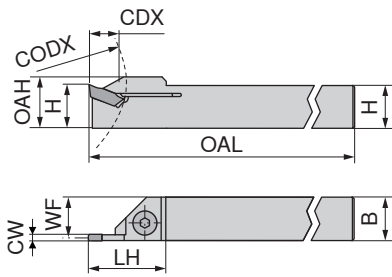

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	CODX mm	CDX mm	for grooving inserts GX 09 ..	Left-hand		Right-hand	
											70 863 ...	70 862 ...		
E10 R/L 00-1010M-GX09	10	10	2,00 - 3,50	9.35	12	150	18	30	7	GX 09 ..	£ 2C/71 142.55	010	£ 2C/71 142.55	010

i When using 'R' or 'L' tools the tool must be modified at the end face to ensure cutting clearance.



Spare parts for grooving inserts

GX 09 ..

Key D		Clamping screw	
80 950 ...	70 950 ...		
£ Y7 15.56	£ 2A/28 11.94	113	442




→ 35-41 → Chapter 16

MonoClamp – Radial Monoholder GX-DC 16

Scope of supply:



Mono holder incl. Torx key and clamping screw

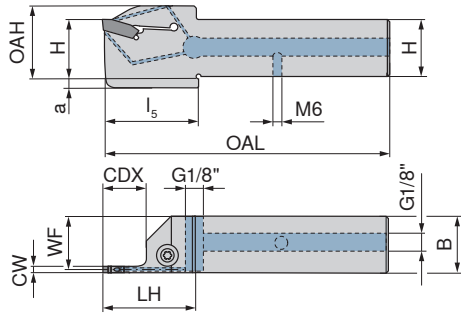

Illustrations show right-hand versions



ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	I _s mm	a mm	CDX mm	for grooving inserts	NEW Left-hand		NEW Right-hand	
												70 842 ...	£	70 842 ...	£
E16 R/L 0013S2-1616X-S-DC-GX16	16	16	2	15.20	21	90	35	36	4	13	GX 16-1 E2..	21601	168.49	21600	168.49
E16 R/L 0013S3-1616X-S-DC-GX16	16	16	3	14.85	21	90	35	36	4	13	GX 16-2 E3..	31601	168.49	31600	168.49
E16 R/L 0013S4-1616X-S-DC-GX16	16	16	4	14.40	21	90	35	36	4	13	GX 16-3 E4..	41601	168.49	41600	168.49
E16 R/L 0013S5-1616X-S-DC-GX16	16	16	5	14.00	21	90	35	36	4	13	GX 16-3 E5..	51601	168.49	51600	168.49
E20 R/L 0013S2-2020X-S-DC-GX16	20	20	2	19.20	25	104	35			13	GX 16-1 E2..	22001	193.95	22000	193.95
E20 R/L 0013S3-2020X-S-DC-GX16	20	20	3	18.85	25	104	35			13	GX 16-2 E3..	32001	193.95	32000	193.95
E20 R/L 0013S4-2020X-S-DC-GX16	20	20	4	18.40	25	104	35			13	GX 16-3 E4..	42001	193.95	42000	193.95
E20 R/L 0013S5-2020X-S-DC-GX16	20	20	5	18.00	25	104	35			13	GX 16-3 E5..	52001	193.95	52000	193.95
E25 R/L 0013S3-2525X-S-DC-GX16	25	25	3	23.85	30	119	35			13	GX 16-2 E3..	32501	206.24	32500	206.24
E25 R/L 0013S4-2525X-S-DC-GX16	25	25	4	23.40	30	119	35			13	GX 16-3 E4..	42501	206.24	42500	206.24
E25 R/L 0013S5-2525X-S-DC-GX16	25	25	5	23.00	30	119	35			13	GX 16-3 E5..	52501	206.24	52500	206.24



Spare parts for grooving inserts	80 950 ...		70 950 ...	
	£		£	
GX 16-1 E2..	Y7		2A/28	
GX 16-2 E3..	20.03	128	11.01	865
GX 16-3 E4..	20.03	128	11.01	865
GX 16-3 E5..	20.03	128	11.01	865




→ 35-42 → Chapter 16

MonoClamp – Radial Monoholder GX 16

Scope of supply:

Mono holder incl. Torx key and clamping screw


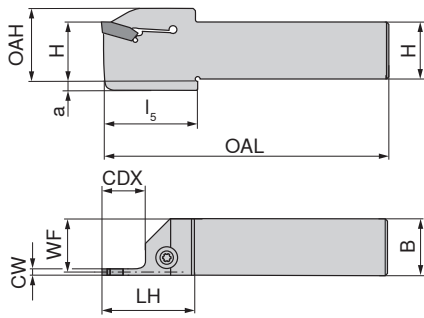


Illustrations show right-hand versions



ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	I _s mm	a mm	CDX mm	for grooving inserts	NEW Left-hand		NEW Right-hand	
												70 843 ...	70 843 ...	£	£
E12 R/L 0013S2-1212K-S-GX16	12	12	2	11.20	17	125	25	26	4	13	GX 16-1 E2..	104.15	21201	104.15	21200
E12 R/L 0013S3-1212K-S-GX16	12	12	3	10.85	17	125	25	26	4	13	GX 16-2 E3..	104.15	31201	104.15	31200
E16 R/L 0013S2-1616K-S-GX16	16	16	2	15.20	21	125	25	26	4	13	GX 16-1 E2..	111.21	21601	111.21	21600
E16 R/L 0013S3-1616K-S-GX16	16	16	3	14.85	21	125	25	26	4	13	GX 16-2 E3..	111.21	31601	111.21	31600
E16 R/L 0013S4-1616K-S-GX16	16	16	4	14.40	21	125	25	26	4	13	GX 16-3 E4..	111.21	41601	111.21	41600
E16 R/L 0013S5-1616K-S-GX16	16	16	5	14.00	21	125	25	26	4	13	GX 16-3 E5..	111.21	51601	111.21	51600
E20 R/L 0013S2-2020K-S-GX16	20	20	2	19.20	25	125	25			13	GX 16-1 E2..	128.00	22001	128.00	22000
E20 R/L 0013S3-2020K-S-GX16	20	20	3	18.85	25	125	25			13	GX 16-2 E3..	128.00	32001	128.00	32000
E20 R/L 0013S4-2020K-S-GX16	20	20	4	18.40	25	125	25			13	GX 16-3 E4..	128.00	42001	128.00	42000
E20 R/L 0013S5-2020K-S-GX16	20	20	5	18.00	25	125	25			13	GX 16-3 E5..	128.00	52001	128.00	52000
E25 R/L 0013S3-2525M-S-GX16	25	25	3	23.85	30	150	25			13	GX 16-2 E3..	136.12	32501	136.12	32500
E25 R/L 0013S4-2525M-S-GX16	25	25	4	23.40	30	150	25			13	GX 16-3 E4..	136.12	42501	136.12	42500
E25 R/L 0013S5-2525M-S-GX16	25	25	5	23.00	30	150	25			13	GX 16-3 E5..	136.12	52501	136.12	52500

When using 'R' or 'L' tools the tool must be modified at the end face to ensure cutting clearance.

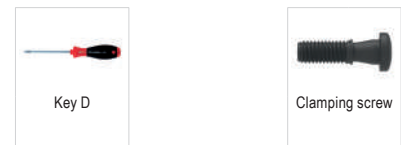

Spare parts for grooving inserts


	80 950 ...		70 950 ...	
	£		£	
GX 16-1 E2..	20.03	128	11.01	865
GX 16-2 E3..	20.03	128	11.01	865
GX 16-3 E4..	20.03	128	11.01	865
GX 16-3 E5..	20.03	128	11.01	865



MonoClamp – Radial Mono-boring bars GX 09

Scope of supply:

Boring bar incl. key and clamping screw

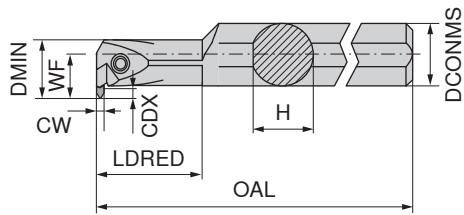


Illustrations show right-hand versions

ISO designation	H mm	DCONMS mm	DMIN mm	CW mm	CDX mm	WF mm	OAL mm	LDRED mm	for grooving inserts GX 09 ..	Left-hand		Right-hand		
										70 859 ...	70 858 ...	70 859 ...	70 858 ...	
I12 R/L 90-2,5D-GX09	15.25	16	16	2,00 - 3,75	3	11	150	30			£ 2C/71 174.79	£ 2C/71 174.79	012	012



i Right hand boring bar → left hand insert only
Left hand boring bar → right hand insert only

i When using "R" or "L" tools the insert support seat requires modification to prevent the insert fouling.



Spare parts for grooving inserts

GX 09 ..



		80 950 ...		70 950 ...	
		£ Y7 15.56	113	£ 2A/28 10.35	441
	T15			M3,5x12,5	




→ 35-41 → Chapter 16

MonoClamp – Radial Mono-boring bars GX 16

Scope of supply:

Boring bar incl. key and clamping screw

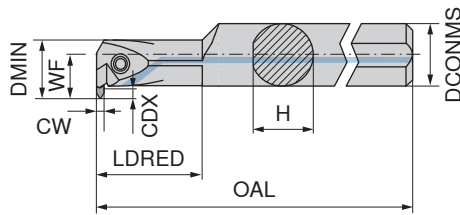


Illustrations show right-hand versions

ISO designation	H mm	DCONMS mm	DMIN mm	CW mm	CDX mm	WF mm	OAL mm	LDRED mm	for grooving inserts	Left-hand		Right-hand	
										70 893 ...	70 892 ...	70 893 ...	70 892 ...
I16 R/L 90-2.0D-GX16-1	15.25	16	20.5	2,00 - 2,75	5.0	13.5	150	32	GX 16-1	£ 2C/71		£ 2C/71	
I16 R/L 90-2.0D-GX16-2	15.25	16	20.5	2,76 - 3,75	5.0	13.5	150	32	GX 16-2	153.88	516	153.88	516
I20 R/L 90-2.0D-GX16-2	19.00	20	25.0	2,76 - 3,75	5.5	15.5	180	40	GX 16-2	153.88	616	153.88	616
I20 R/L 90-2.0D-GX16-2	19.00	20	25.0	2,76 - 3,75	5.5	15.5	180	40	GX 16-2	166.24	620	166.24	620
I25 R/L 90-2.0D-GX16-2	24.00	25	32.0	2,76 - 3,75	8.0	20.5	200	50	GX 16-2	193.25	625	193.25	625
I25 R/L 90-2.0D-GX16-3	24.00	25	32.0	3,76 - 5,00	10.0	22.5	200	50	GX 16-3	193.25	725	193.25	725
I32 R/L 90-2.0D-GX16-2	31.00	32	42.0	2,76 - 3,75	11.0	27.5	250	64	GX 16-2	224.66	632	224.66	632
I32 R/L 90-2.0D-GX16-3	31.00	32	42.0	3,76 - 5,00	11.0	27.5	250	64	GX 16-3	224.66	732	224.66	732

i Right hand boring bar → left hand insert only
Left hand boring bar → right hand insert only

i When using "R" or "L" tools the insert support seat requires modification to prevent the insert fouling.



11

Spare parts for grooving inserts


		80 950 ...		70 950 ...	
		£ Y7		£ 2A/28	
GX 16-1	T15	15.56	113	9.90	403
GX 16-2	T15	15.56	113	9.90	403
GX 16-3	T15	15.56	113	9.90	403




→ 35-42 → Chapter 16

Insert GX 24

- ▲ Insert with ground periphery
- ▲ Suitable also for parting off tubes and thin-walled workpieces



F	M	R

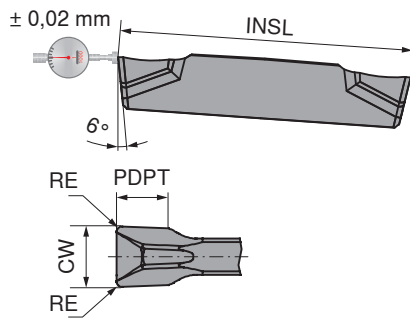

-F2 CTCP325	-F2 CTPP345	-F2 CTP1340
DRAGONSKIN	DRAGONSKIN	DRAGONSKIN



Designation	INSL mm	CW mm	RE mm	PDPT mm	for tool holder
GX 24-2 E3.00 N 0.30	24	3.0	0.3	2.5	GX 24-2
GX 24-2 E3.50 N 0.30	24	3.5	0.3	2.5	GX 24-2
GX 24-3 E4.00 N 0.40	24	4.0	0.4	3.0	GX 24-3
GX 24-3 E5.00 N 0.40	24	5.0	0.4	3.5	GX 24-3
GX 24-4 E6.00 N 0.50	24	6.0	0.5	4.0	GX 24-4

70 350 ...	70 350 ...	70 350 ...
£	£	£
1C/72	1C/72	1C/72
31.33	31.33	31.33
962	862	662
33.82	33.82	33.82
966	866	666
37.10	37.10	37.10
970	870	671
	40.79	40.79
	872	672

P	●	●	●
M	○	●	●
K	●	○	○
N	○	○	○
S	○	○	●
H			
O			○

→ v, Page 103
→ Application recommendation on page 105




Internal machining

External machining



Insert GX 24

- ▲ Universal application
- ▲ First choice for axial grooving

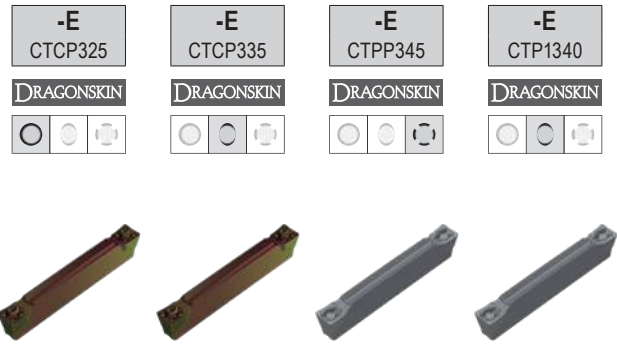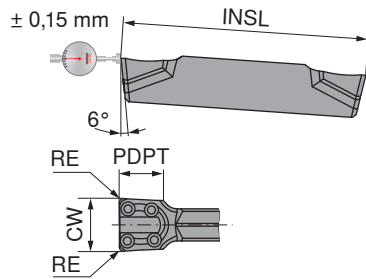

Designation	INSL mm	CW mm	RE mm	PDPT mm	for tool holder	70 350 ...		70 350 ...		70 350 ...		70 350 ...	
						£		£		£		£	
GX 24-2 E3.00 N 0.30	24	3	0.3	2.5	GX 24-2	21.09	932	21.09	532	21.09	832	21.09	632
GX 24-3 E4.00 N 0.40	24	4	0.4	3.0	GX 24-3	23.07	936	23.07	536	23.07	836	23.07	636
GX 24-3 E5.00 N 0.40	24	5	0.4	3.0	GX 24-3	25.17	940	25.17	540	25.17	840	25.17	640
GX 24-4 E6.00 N 0.50	24	6	0.5	3.5	GX 24-4	27.66	944	27.66	544	27.66	844	27.66	644

P	●	●	●	●
M	○	○	●	●
K	●	●	●	●
N	○	○	○	○
S	○	○	○	●
H				
O				○

→ v_c Page 103
→ Application recommendation on page 105




Internal machining

External machining



Insert GX 24

▲ Very good swarf control

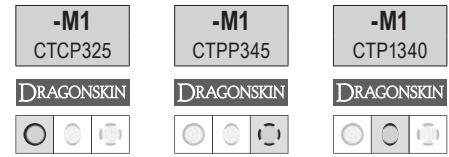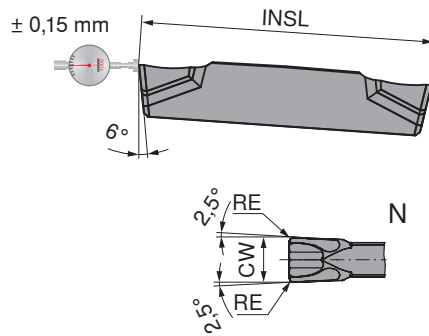

Designation	INSL mm	CW $\pm 0,05$ mm	RE $\pm 0,05$ mm	for tool holder
GX 24-1 E2.00 N 0.20	24	2	0.2	GX 24-1
GX 24-2 E3.00 N 0.20	24	3	0.2	GX 24-2
GX 24-3 E4.00 N 0.30	24	4	0.3	GX 24-3

70 363 ...		70 363 ...		70 363 ...	
£		£		£	
1C/72		1C/72		1C/72	
21.09	900	21.09	800	21.09	600
21.09	902	21.09	802	21.09	602
23.07	904	23.07	804	23.07	604

P	●	●	●
M	○	●	●
K	●	●	●
N	○	○	○
S	○	○	●
H			
O			○

→ v. Page 103
→ Application recommendation on page 106




Internal machining

External machining



Insert GX 24

▲ Very good swarf control

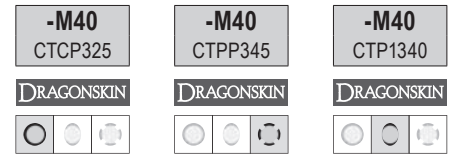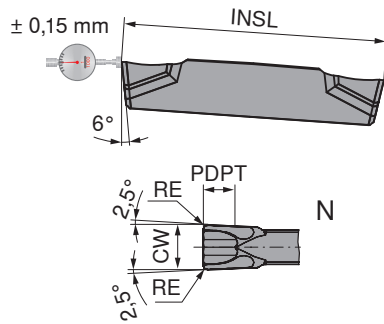

Designation	INSL mm	CW $\pm 0,05$ mm	RE $\pm 0,05$ mm	PDPT mm	for tool holder
GX 24-3 E4.00 N 0.40	24	4	0.4	4.0	GX 24-3
GX 24-3 E5.00 N 0.40	24	5	0.4	4.0	GX 24-3
GX 24-4 E6.00 N 0.50	24	6	0.5	4.0	GX 24-4

70 364 ...		70 364 ...		70 364 ...	
£		£		£	
1C/72		1C/72		1C/72	
21.09	900	21.09	800	21.09	600
23.07	902	23.07	802	23.07	602
25.17	904	25.17	804	25.17	604
27.66	906	27.66	806	27.66	606

P	●	●	●
M	○	●	●
K	●		●
N			○
S	○	○	●
H			
O			○




→ v_c Page 103
→ Application recommendation on page 105

Internal machining

External machining



Radius groove insert GX 24



Designation	INSL mm	CW $\pm 0,05$ mm	CRE mm	PDPT mm	for tool holder	70 354 ...		70 354 ...	
						£		£	
GX 24-2 R1.50 N	24.4	3	1.5	1.5	GX 24-2	1C/72		1C/72	
GX 24-3 R2.00 N	24.4	4	2.0	2.5	GX 24-3	28.04	952	28.04	552
GX 24-3 R2.50 N	24.4	5	2.5	3.0	GX 24-3	30.03	954	30.03	554
GX 24-4 R3.00 N	24.4	6	3.0	4.0	GX 24-4	31.33	956	31.33	556
						33.69	958	33.69	558

P	●	●
M	○	○
K	●	●
N		
S	○	
H		
O		

→ v. Page 103
→ Application recommendation on page 106



Internal machining

External machining



Radius groove insert GX 24

▲ Suitable for the machining of tough and ductile materials



NEW

-M33
CTCP325

DRAGONSKIN



70 365 ...

Designation	INSL mm	CW _{+/-0,05} mm	CRE mm	PDPT mm	for tool holder	£	
GX 24-2 R1.50 N	24.4	3	1.5	1.5	GX 24-2	1C/72	95200
GX 24-3 R2.00 N	24.4	4	2.0	2.5	GX 24-3	28.04	95400
GX 24-3 R2.50 N	24.4	5	2.5	3.0	GX 24-3	30.03	95600
GX 24-4 R3.00 N	24.4	6	3.0	4.0	GX 24-4	31.33	95800
						33.69	95800

P	●
M	○
K	●
N	○
S	○
H	
O	

→ v. Page 103
→ Application recommendation on page 106



Internal machining

External machining




Insert GX 24

- ▲ Insert with highly positive cutting edge geometry and sharp cutting edge
- ▲ ground periphery

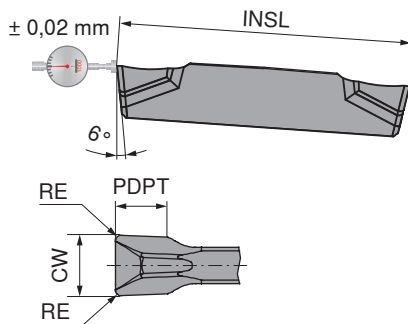

-27P
H216T



70 350 ...

Designation	INSL mm	CW $\pm 0,02$ mm	RE $\pm 0,05$ mm	PDPT mm	for tool holder
GX 24-2 E3.00 N 0.30	24	3	0.3	2.5	GX 24-2
GX 24-3 E4.00 N 0.40	24	4	0.4	3.0	GX 24-3
GX 24-3 E5.00 N 0.40	24	5	0.4	3.5	GX 24-3
GX 24-4 E6.00 N 0.50	24	6	0.5	4.0	GX 24-4

£	
1C/72	
25.17	682
27.66	684
28.84	686
29.91	688

P	
M	
K	●
N	●
S	○
H	
O	○

→ v. Page 103
→ Application recommendation on page 105





Internal machining

External machining



Radius grooving insert GX 24

- ▲ Insert with highly positive cutting edge geometry and sharp cutting edge
- ▲ ground periphery



Designation	INSL mm	CW _{+/-0,02} mm	CRE mm	PDPT mm	for tool holder
GX 24-4 R3.00 N	25.4	6	3	4	GX 24-4
GX 24-5 R4.00 N	25.4	8	4	5	GX 24-5

70 353 ...	
£	
1C/72	
37.62	500
39.70	506

P	
M	
K	●
N	●
S	○
H	
O	○

→ v_c Page 103
→ Application recommendation on page 106

Internal machining


External machining




ModularClamp MSS – Radial grooving module GX 24

- ▲ For deep radial parting and grooving
- ▲ For turning

Scope of supply:
Grooving module only



Illustrations show right-hand versions



ISO designation	CW mm	WF mm	LF mm	HF mm	H mm	CODX mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
									70 868 ...	70 867 ...	70 868 ...	70 867 ...
E20 R/L 21-GX 24-1	2,00 - 2,75	3.60	22	20	24	60	21	GX 24-1	£ 2C/71		£ 2C/71	
E20 R/L 21-GX 24-2	3	3.40	22	20	24	60	21	GX 24-2	99.14	020	99.14	020
E20 R/L 21-GX 24-3	4/5	2.93	22	20	24	30	21	GX 24-3	99.14	120	99.14	120
										22000		22000
E25 R/L 21-GX 24-1	2,00 - 2,75	5.10	22	25	30	75	21	GX 24-1	99.87	025	99.87	025
E25 R/L 21-GX 24-2	3	4.90	22	25	30	75	21	GX 24-2	99.87	125	99.87	125
E25 R/L 21-GX 24-3	4/5	4.43	22	25	30	75	21	GX 24-3	99.87	225	99.87	225
E25 R/L 21-GX 24-4	6	3.80	22	25	30	75	21	GX 24-4	99.87	325	99.87	325
E25 R/L 21-GX 24-5	8	2.95	22	25	30	75	21	GX 24-5	99.87	425	99.87	425



→ 52-59


→ 95+96

→ 97


ModularClamp MSS – Axial grooving module GX 24 short

- ▲ For axial grooving
- ▲ For face turning

Scope of supply:
Grooving module only

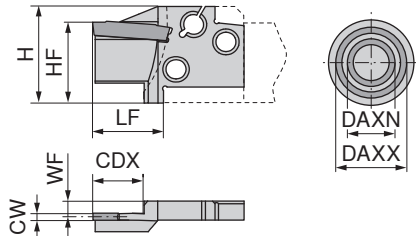

Illustrations show right-hand versions



ISO designation	DAXN mm	DAXX mm	CW mm	WF mm	LF mm	HF mm	H mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
										70 891 ...	70 890 ...	70 891 ...	70 890 ...
										£		£	
E20 R/L 14-GX 24-2 A	50	70	3	3.40	22	20	24	14	GX 24-2	128.72	100	128.72	100
E20 R/L 14-GX 24-2 A	70	100	3	3.40	22	20	24	14	GX 24-2	128.72	102	128.72	102
E20 R/L 14-GX 24-2 A	100	150	3	3.40	22	20	24	14	GX 24-2	128.72	104	128.72	104
E25 R/L 15-GX 24-2 A	50	70	3	4.90	22	25	30	15	GX 24-2	129.86	200	129.86	200
E25 R/L 15-GX 24-2 A	70	100	3	4.90	22	25	30	15	GX 24-2	129.86	202	129.86	202
E25 R/L 15-GX 24-2 A	100	150	3	4.90	22	25	30	15	GX 24-2	129.86	204	129.86	204
E25 R/L 15-GX 24-3 A	50	70	4/5	4.43	22	25	30	15	GX 24-3	129.86	206	129.86	206
E25 R/L 15-GX 24-3 A	70	100	4/5	4.43	22	25	30	15	GX 24-3	129.86	208	129.86	208
E25 R/L 15-GX 24-3 A	100	150	4/5	4.43	22	25	30	15	GX 24-3	129.86	210	129.86	210
E25 R/L 15-GX 24-3 A	150	300	4/5	4.43	22	25	30	15	GX 24-3	129.86	212	129.86	212
E25 R/L 15-GX 24-4 A	50	70	6	3.80	22	25	30	15	GX 24-4	129.86	214	129.86	214
E25 R/L 15-GX 24-4 A	70	100	6	3.80	22	25	30	15	GX 24-4	129.86	216	129.86	216
E25 R/L 15-GX 24-4 A	100	150	6	3.80	22	25	30	15	GX 24-4	129.86	218	129.86	218
E25 R/L 15-GX 24-4 A	150	300	6	3.80	22	25	30	15	GX 24-4	129.86	220	129.86	220



→ 52-59



→ 95+96

→ 97

ModularClamp MSS – Axial grooving module GX 24 long


- ▲ For axial grooving
- ▲ For face turning



Scope of supply:
Grooving module only

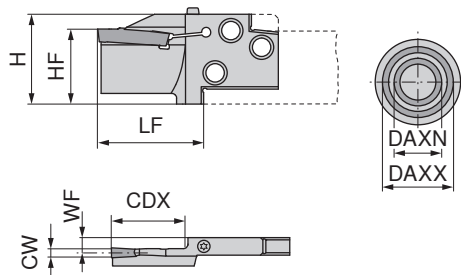

Illustrations show right-hand versions

ISO designation	DAXN mm	DAXX mm	CW mm	WF mm	LF mm	HF mm	H mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
										70 895 ...	200	70 894 ...	200
E25 R/L 21-GX 24-3 AS	50	70	4/5	4.53	35	25	30	21	GX 24-3	£ 2C/71		£ 2C/71	
E25 R/L 21-GX 24-3 AS	70	100	4/5	4.53	35	25	30	21	GX 24-3	132.53	202	132.53	202
E25 R/L 21-GX 24-3 AS	100	150	4/5	4.53	35	25	30	21	GX 24-3	132.53	204	132.53	204
E25 R/L 21-GX 24-3 AS	150	300	4/5	4.53	35	25	30	21	GX 24-3	132.53	206	132.53	206
E25 R/L 25-GX 24-4 AS	50	70	6	3.90	35	25	30	25	GX 24-4	132.53	210	132.53	210
E25 R/L 25-GX 24-4 AS	70	100	6	3.90	35	25	30	25	GX 24-4	132.53	212	132.53	212
E25 R/L 25-GX 24-4 AS	100	150	6	3.90	35	25	30	25	GX 24-4	132.53	214	132.53	214
E25 R/L 25-GX 24-4 AS	150	300	6	3.90	35	25	30	25	GX 24-4	132.53	216	132.53	216

 Axial modules version "GX 24 long" can be clamped on both sides.



Spare parts for grooving inserts	80 950 ...		70 950 ...	
	£ Y7		£ 2A/28	
GX 24-3	15.56	113	4.73	160
GX 24-4	15.56	113	4.73	160



→ 52-59


→ 95+96

→ 97

ModularClamp MSS – Radial Grooving module GX 24 for Internal machining

▲ for grooving and turning

Scope of supply:
Grooving module only



Neutral

70 880 ...

ISO designation	CW mm	LB mm	WF mm	H mm	CDX mm	DMIN mm	for grooving inserts	£	
I40 N 19-GX 24-2	2,76 - 3,75	6.2	33.5	40.7	19	60	GX 24-2 ..N	2C/71	340
I40 N 19-GX 24-3	3,76 - 5,00	6.2	33.5	40.7	19	60	GX 24-3 ..N	115.44	440
I40 N 19-GX 24-4	5,01 - 6,50	6.2	33.5	40.7	19	60	GX 24-4 ..N	115.44	540





→ 52-59

→ 98

MonoClamp – Radial Blade GX 24

Scope of supply:

Blade incl. key and clamping screw

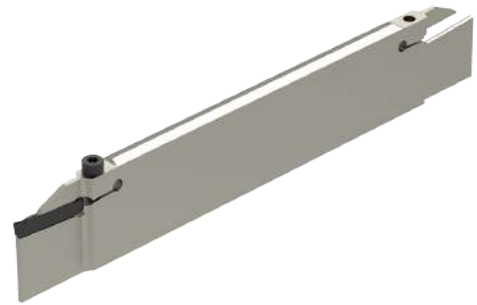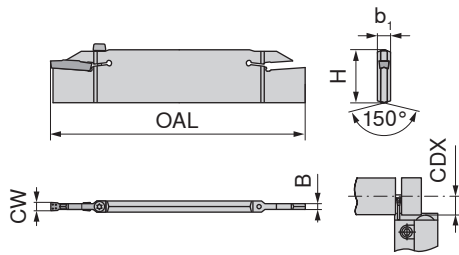

ISO designation	CW mm	H mm	B mm	b ₁ mm	OAL mm	CDX mm	for grooving inserts
XLCF N 3203-GX24-1S	2	32	1.05	6.2	180	21	GX 24-1
XLCF N 3203-GX24-2S	3	32	2.10	6.2	180	21	GX 24-2
XLCF N 3204-GX24-3S	4/5	32	3.05	6.2	180	21	GX 24-3
XLCF N 3206-GX24-4S	6	32	4.20	6.2	180	21	GX 24-4

70 834 ...

£	
2A/25	102
96.71	103
98.18	104
104.69	106
123.74	

**Spare parts
for grooving inserts**

		80 950 ...		70 950 ...	
		£		£	
GX 24-1	T15	15.56	113	M3,5x14	4.73 160
GX 24-2	T15	15.56	113	M3,5x14	4.73 160
GX 24-3	T15	15.56	113	M3,5x14	4.73 160
GX 24-4	T15	15.56	113	M3,5x14	4.73 160



Key D



Clamping screw

80 950 ...

70 950 ...

£
Y7

£
2A/28



→ 52-59


→ 100+101

→ Chapter 16


MonoClamp – Radial Monoholder GX-DC 24

Scope of supply:

Mono holder incl. key and clamping screw



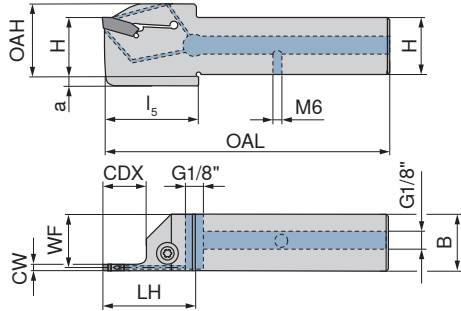


Illustrations show right-hand versions

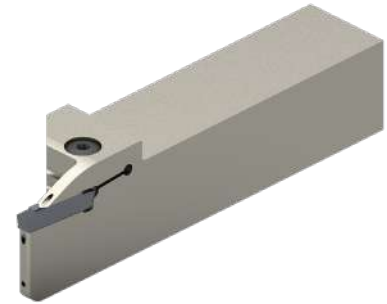

ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	I _s mm	CDX mm	a mm	for grooving inserts	NEW Left-hand		NEW Right-hand	
												70 844 ...	£	70 844 ...	£
E16 R/L 0021S2-1616X-S-DC-GX24	16	16	2	15.2	22	94	39	40	21	4	GX 24-1 E2..	21601	181.13	21600	181.13
E16 R/L 0021S3-1616X-S-DC-GX24	16	16	3	14.8	22	94	39	40	21	4	GX 24-2 E3..	31601	181.13	31600	181.13
E20 R/L 0021S2-2020X-S-DC-GX24	20	20	2	19.2	26	109	40		21		GX 24-1 E2..	22001	208.49	22000	208.49
E20 R/L 0021S3-2020X-S-DC-GX24	20	20	3	18.8	26	109	40		21		GX 24-2 E3..	32001	208.49	32000	208.49
E20 R/L 0021S4-2020X-S-DC-GX24	20	20	4	18.3	26	109	40		21		GX 24-3 E4..	42001	208.49	42000	208.49
E20 R/L 0021S5-2020X-S-DC-GX24	20	20	5	18.0	26	109	40		21		GX 24-3 E5..	52001	208.49	52000	208.49
E25 R/L 0021S3-2525X-S-DC-GX24	25	25	3	23.8	31	124	40		21		GX 24-2 E3..	32501	222.86	32500	222.86
E25 R/L 0021S4-2525X-S-DC-GX24	25	25	4	23.3	31	124	40		21		GX 24-3 E4..	42501	222.86	42500	222.86
E25 R/L 0021S5-2525X-S-DC-GX24	25	25	5	23.0	31	124	40		21		GX 24-3 E5..	52501	222.86	52500	222.86
E25 R/L 0021S6-2525X-S-DC-GX24	25	25	6	22.5	31	124	40		21		GX 24-4 E6..	62501	222.86	62500	222.86

Spare parts for grooving inserts		80 950 ...		70 950 ...	
		£		£	
GX 24-1 E2..	T15 - IP	20.03	128	11.01	865
GX 24-2 E3..	T15 - IP	20.03	128	11.01	865
GX 24-3 E4..	T15 - IP	20.03	128	11.01	865
GX 24-3 E5..	T15 - IP	20.03	128	11.01	865
GX 24-4 E6..	T15 - IP	20.03	128	11.01	865




→ 52-59 → Chapter 16

MonoClamp – Radial Monoholder GX 24

Scope of supply:


Mono holder incl. key and clamping screw

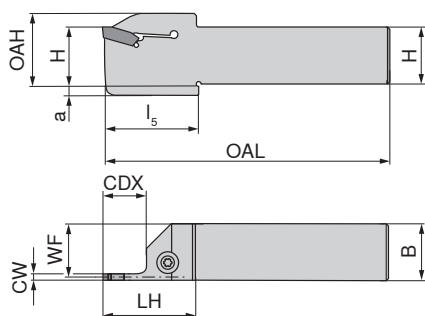

Illustrations show right-hand versions




ISO designation	H mm	B mm	CW mm	WF mm	OAH mm	OAL mm	LH mm	I ₅ mm	CDX mm	a mm	for grooving inserts	NEW Left-hand		NEW Right-hand	
												70 845 ...	70 845 ...	70 845 ...	70 845 ...
E16 R/L 0021S2-1616K-S-GX24	16	16	2	15.2	22	125	39	40	21	4	GX 24-1 E2..	£ 2C/71	21601	£ 2C/71	21600
E16 R/L 0021S3-1616K-S-GX24	16	16	3	14.8	22	125	39	40	21	4	GX 24-2 E3..	£ 119.55	31601	£ 119.55	31600
E20 R/L 0021S2-2020K-S-GX24	20	20	2	19.2	26	125	40		21		GX 24-1 E2..	£ 137.60	22001	£ 137.60	22000
E20 R/L 0021S3-2020K-S-GX24	20	20	3	18.8	26	125	40		21		GX 24-2 E3..	£ 137.60	32001	£ 137.60	32000
E20 R/L 0021S4-2020K-S-GX24	20	20	4	18.3	26	125	40		21		GX 24-3 E4..	£ 137.60	42001	£ 137.60	42000
E20 R/L 0021S5-2020K-S-GX24	20	20	5	18.0	26	125	40		21		GX 24-3 E5..	£ 137.60	52001	£ 137.60	52000
E25 R/L 0021S3-2525M-S-GX24	25	25	3	23.8	31	150	40		21		GX 24-2 E3..	£ 147.09	32501	£ 147.09	32500
E25 R/L 0021S4-2525M-S-GX24	25	25	4	23.3	31	150	40		21		GX 24-3 E4..	£ 147.09	42501	£ 147.09	42500
E25 R/L 0021S5-2525M-S-GX24	25	25	5	23.0	31	150	40		21		GX 24-3 E5..	£ 147.09	52501	£ 147.09	52500
E25 R/L 0021S6-2525M-S-GX24	25	25	6	22.5	31	150	40		21		GX 24-4 E6..	£ 147.09	62501	£ 147.09	62500



**Spare parts
for grooving inserts**

		80 950 ...	70 950 ...
		£ Y7	£ 2A/28
GX 24-1 E2..	T15 - IP	20.03 128	M5x18 - 15IP 11.01 865
GX 24-2 E3..	T15 - IP	20.03 128	M5x18 - 15IP 11.01 865
GX 24-3 E4..	T15 - IP	20.03 128	M5x18 - 15IP 11.01 865
GX 24-3 E5..	T15 - IP	20.03 128	M5x18 - 15IP 11.01 865
GX 24-4 E6..	T15 - IP	20.03 128	M5x18 - 15IP 11.01 865




→ 52-59 → Chapter 16

MonoClamp – Radial Mono-boring bars GX 24

Scope of supply:

Boring bar incl. key and clamping screw

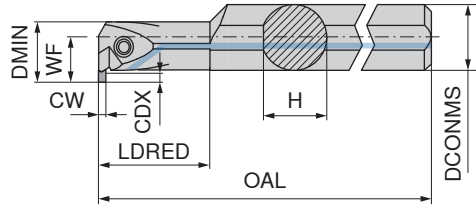

ISO designation	H mm	DCONMS mm	DMIN mm	CW mm	CDX mm	WF mm	OAL mm	LDRED mm	for grooving inserts	Left-hand		Right-hand	
										70 895 ...	70 894 ...	70 895 ...	70 894 ...
I32 R/L 90-2.0D-GX24-2	31.0	32	42	2,76 - 3,75	11	27.5	250	64	GX 24-2	£ 2C/71		£ 2C/71	
I32 R/L 90-2.0D-GX24-3	31.0	32	42	3,76 - 5,00	11	27.5	250	64	GX 24-3	224.66	132	224.66	132
I40 R/L 90-2.0D-GX24-3	38.5	40	53	3,76 - 5,00	12	32.5	300	80	GX 24-3	279.14	240	279.14	240




→ 52-59 → Chapter 16



MonoClamp – Radial Mono-boring bars GX 24

Scope of supply:

Boring bar incl. key and clamping screw

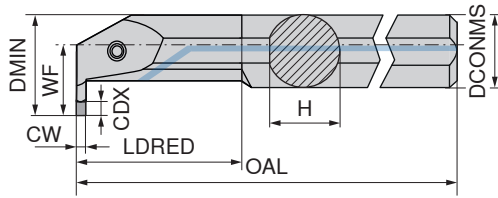

ISO designation	H mm	DCONMS mm	DMIN mm	CW mm	CDX mm	WF mm	OAL mm	LDRED mm	for grooving inserts	Left-hand		Right-hand	
										70 895 ...		70 894 ...	
I32 R/L 90-2.0D-GX24-4	31.0	32	47	5,01 - 6,50	17.5	30.4	250	64	GX 24-4	£ 2C/71 224.66	332	£ 2C/71 224.66	332
I40 R/L 90-2.0D-GX24-4	38.5	40	57	5,01 - 6,50	17.5	34.4	300	80	GX 24-4	£ 279.14	340	£ 279.14	340



**Spare parts
for grooving inserts**

	80 950 ...		70 950 ...	
	£		£	
GX 24-2	Y7		2A/28	
GX 24-3	16.66	114	6.60	404
GX 24-4	16.66	114	6.60	404




→ 52-59 → Chapter 16

MonoClamp – Axial Monoholder GX24


Scope of supply:

Mono holder incl. key and clamping screw

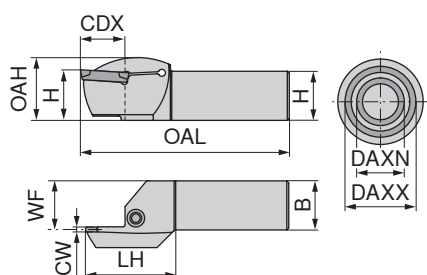

Illustrations show right-hand versions

ISO designation	H mm	B mm	CW mm	WF mm	DAXN mm	DAXX mm	OAH mm	OAL mm	LH mm	CDX mm	for grooving inserts	Left-hand	Right-hand
												70 904 ...	70 903 ...
												£	£
E25 R/L 0012-2525X-GX24-2	25	25	3	24.7	45	50	32	115	45	12	GX 24-2	202	202
E25 R/L 0016-2525X-GX24-2	25	25	3	24.7	50	60	32	115	45	16	GX 24-2	204	204
E25 R/L 0019-2525X-GX24-2	25	25	3	24.7	60	75	32	115	45	19	GX 24-2	206	206
E25 R/L 0019-2525X-GX24-2	25	25	3	24.7	75	100	32	115	45	19	GX 24-2	208	208
E25 R/L 0022-2525X-GX24-2	25	25	3	24.7	100	130	32	115	45	22	GX 24-2	210	210
E25 R/L 0022-2525X-GX24-2	25	25	3	24.7	130	180	32	115	45	22	GX 24-2	212	212
E25 R/L 0022-2525X-GX24-2	25	25	3	24.7	180	300	32	115	45	22	GX 24-2	214	214
E25 R/L 0012-2525X-GX24-3	25	25	4+5	24.2	45	50	32	115	45	12	GX 24-3	232	232
E25 R/L 0020-2525X-GX24-3	25	25	4+5	24.2	50	60	32	115	45	20	GX 24-3	234	234
E25 R/L 0020-2525X-GX24-3	25	25	4+5	24.2	60	75	32	115	45	20	GX 24-3	236	236
E25 R/L 0022-2525X-GX24-3	25	25	4+5	24.2	75	100	32	115	45	22	GX 24-3	238	238
E25 R/L 0022-2525X-GX24-3	25	25	4+5	24.2	100	150	32	115	45	22	GX 24-3	240	240
E25 R/L 0022-2525X-GX24-3	25	25	4+5	24.2	150	300	32	115	45	22	GX 24-3	242	242
E25 R/L 0022-2525X-GX24-4	25	25	6	23.2	50	70	32	115	45	22	GX 24-4	262	262
E25 R/L 0025-2525X-GX24-4	25	25	6	23.2	70	100	32	115	45	25	GX 24-4	264	264
E25 R/L 0025-2525X-GX24-4	25	25	6	23.2	100	150	32	115	45	25	GX 24-4	266	266
E25 R/L 0025-2525X-GX24-4	25	25	6	23.2	150	300	32	115	45	25	GX 24-4	268	268




Key D



Clamping screw

**Spare parts
for grooving inserts**



		80 950 ...	70 950 ...
		£	£
GX 24-2	T15 - IP	20.03 128	M5x18 - 15IP 11.01 865
GX 24-3	T15 - IP	20.03 128	M5x18 - 15IP 11.01 865
GX 24-4	T15 - IP	20.03 128	M5x18 - 15IP 11.01 865




→ 52-59 → Chapter 16

TX grooving insert for grooving and parting off

- ▲ Cutting depth 5.0 mm
- ▲ Cutting width 1.99–2.79 mm

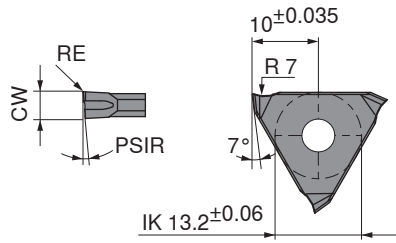

Illustrations show right-hand versions



ISO designation	CW _{-0.05} mm	RE mm	PSIR	for tool holder
TX R/L 0518.00.1	1.99	0.1	5°	R/L 207 ... / 780 ... 1
TX R/L 0521.00.2	2.29	0.1	5°	R/L 207 ... / 780 ... 2
TX R/L 0526.00.2	2.79	0.1	5°	R/L 207 ... / 780 ... 2

Left-hand		Right-hand	
73 302 ...		73 301 ...	
£		£	
Y6		Y6	
58.52	204	56.92	204
56.34	206	58.78	206
56.34	208	58.78	208



P	●	●
M	●	●
K	●	●
N	●	●
S	●	●
H	○	○
O	●	●

→ v_c Page 104

Grooving depth

Full material

Pipe



max. 10 mm

D ≤ 50 mm: Wall thickness B = approx. 5 mm
D ≥ 50 mm: Wall thickness B = approx. 4 mm

Internal machining

External machining



→ 78


→ 75-77

TX insert for circlip grooves

▲ For circlip grooves according to DIN 471 / 472



CWX500

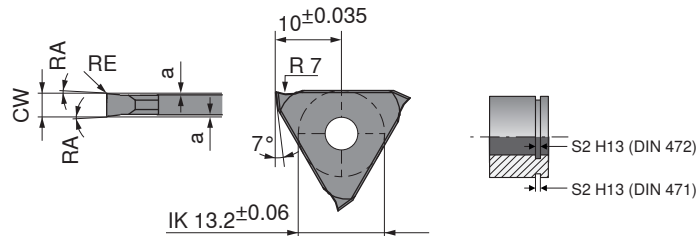

Neutral

Designation	s ₂ mm	CW _{-0.05} mm	RE mm	RA °	a _{+/-0.02} mm	for tool holder	73 300 ...	
							£	
TX N 0050.00.1	0.50	0.57	0.05	1	0.07	R/L ... 1	38.89	204
TX N 0060.00.1	0.60	0.67	0.05	1	0.07	R/L ... 1	38.89	206
TX N 0070.00.1	0.70	0.77	0.05	1	0.08	R/L ... 1	38.89	208
TX N 0080.00.1	0.80	0.87	0.05	1	0.08	R/L ... 1	38.89	210
TX N 0090.00.1	0.90	0.97	0.05	1	0.08	R/L ... 1	38.89	212
TX N 0100.00.1	1.00	1.07	0.10	1	0.09	R/L ... 1	38.89	214
TX N 0110.00.1	1.10	1.24	0.10	3	0.15	R/L ... 1	38.89	216
TX N 0130.00.1	1.30	1.44	0.10	3	0.15	R/L ... 1	38.89	218
TX N 0160.00.1	1.60	1.74	0.10	3	0.20	R/L ... 1	38.89	220
TX N 0185.00.1	1.85	1.99	0.10	3	0.20	R/L ... 1	38.89	222
TX N 0215.00.2	2.15	2.29	0.10	3	0.20	R/L ... 2	38.89	224
TX N 0265.00.2	2.65	2.79	0.10	3	0.20	R/L ... 2	38.89	226
TX N 0315.00.3	3.15	3.29	0.10	3	0.20	R/L ... 3	44.37	228
TX N 0415.00.4	4.15	4.29	0.10	3	0.20	R/L ... 4	44.61	230
TX N 0515.00.4	5.15	5.29	0.10	3	0.20	R/L ... 4	46.03	232

P	●
M	●
K	●
N	●
S	●
H	○
O	●

11

→ v_c Page 104

Internal machining

External machining



→ 78


→ 75-77

Radial TX insert for corner recessing

▲ Full radius for cutting width 0.5–5.0 mm



CWX500

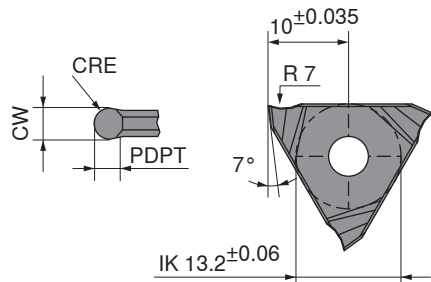

Neutral

73 304 ...


Designation	CRE mm	CW ± 0.05 mm	PDPT mm	for tool holder	£	
TX N 0002.05.1	0.25	0.5	0.20	R/L ...1	56.58	212
TX N 0005.10.1	0.50	1.0	0.35	R/L ...1	56.58	214
TX N 0006.12.1	0.60	1.2	0.40	R/L ...1	56.58	216
TX N 0008.16.1	0.80	1.6	0.55	R/L ...1	56.58	218
TX N 0010.20.2	1.00	2.0	0.70	R/L ...2	59.03	204
TX N 0012.25.2	1.25	2.5	0.85	R/L ...2	65.44	220
TX N 0015.30.3	1.50	3.0	1.00	R/L ...3	62.42	206
TX N 0020.40.4	2.00	4.0	1.20	R/L ...4	61.98	208
TX N 0025.50.4	2.50	5.0	1.50	R/L ...4	63.03	210

P	●
M	●
K	●
N	●
S	●
H	○
O	●


→ v_c Page 104

Internal machining


External machining

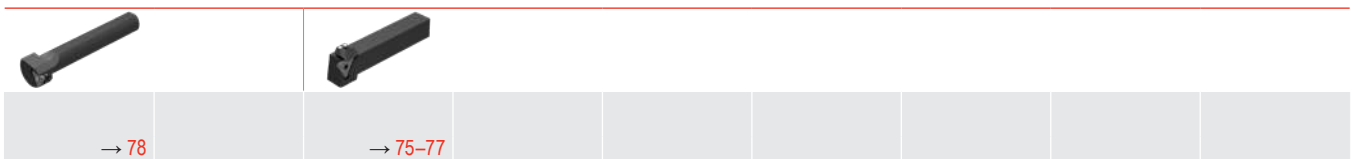

TX insert for fine and copy turning



CWX500

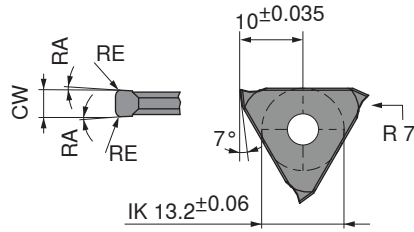

Neutral

73 303 ...

Designation	CW mm ^{+0.03}	RE mm	RA °	for tool holder	73 303 ...	
					£	
TX N 0150.02.1	1.5	0.2	3	R/L 207 ... / 738 ... / 660 ... 1	48.55	204
TX N 0200.02.1	2.0	0.2	3	R/L 207 ... / 738 ... / 660 ... 1	48.55	206
TX N 0200.04.1	2.0	0.4	3	R/L 207 ... / 738 ... / 660 ... 1	48.55	208
TX N 0300.06.2	3.0	0.6	3	R/L 207 ... / 738 ... / 660 ... 2	51.20	212
TX N 0300.02.2	3.0	0.2	3	R/L 207 ... / 738 ... / 660 ... 2	51.20	210
TX N 0300.08.2	3.0	0.8	3	R/L 207 ... / 738 ... / 660 ... 2	51.20	214
TX N 0400.08.3	4.0	0.8	3	R/L 207 ... / 738 ... / 660 ... 3	51.63	218
TX N 0400.02.3	4.0	0.2	3	R/L 207 ... / 738 ... / 660 ... 3	51.63	216
TX N 0400.12.3	4.0	1.2	3	R/L 207 ... / 738 ... / 660 ... 3	51.63	220

P	●
M	●
K	●
N	●
S	●
H	○
O	●

→ v. Page 104

Internal machining

External machining




→ 78


→ 75-77

TX insert for axial grooving

- ▲ Up to cutting depth 3.5 mm
- ▲ Cutting width 1.5–5.0 mm
- ▲ Groove-Ø external $D_a \geq 20$ mm

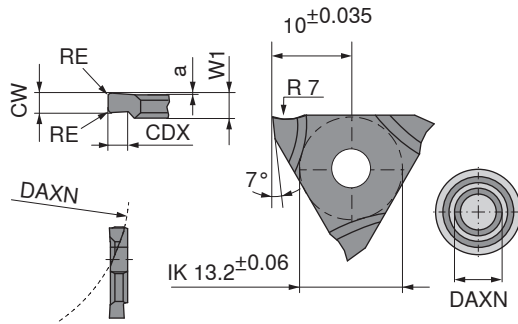

Illustrations show right-hand versions



Left-hand Right-hand

ISO designation	CW mm	W1 mm	CDX mm	a mm	DAXN mm	RE mm	for tool holder
TX R/L 2015.2.2	1.5	2.7	2	0.2	20	0.2	R/L 207 ... 2
TX R/L 3020.2.2	2.0	2.7	3	0.2	30	0.2	R/L 207 ... 2
TX R/L 3030.2.3	3.0	3.7	3	0.2	30	0.2	R/L 207 ... 3

Left-hand		Right-hand	
73 306 ...		73 305 ...	
£		£	
Y6		Y6	
55.66	204	55.66	204
55.66	206	55.66	206
56.31	208	56.31	208

P		●	●
M		●	●
K		●	●
N		●	●
S		●	●
H		○	○
O		●	●

→ v_c Page 104

Internal machining

External machining





→ 75+76

MonoClamp – Radial/Axial TX Grooving Holder 0°, 6 mm cutting depth

- ▲ For radial and axial grooving
- ▲ Cutting width 0.5 – 6.3 mm

Scope of supply:
Grooving holder only

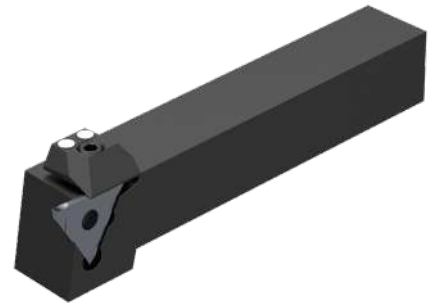

Illustrations show right-hand versions

ISO designation	H mm	B _{+/-0,1} mm	OAL mm	l ₂ mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
							73 501 ...	73 500 ...	£	£
R/L 207.1212.1	12	12	100	24	4	TX R/N/L ...1	248.77	112	246.07	112
R/L 207.1616.1	16	16	125	22	4	TX R/N/L ...1	221.97	116	219.62	116
R/L 207.2020.1	20	20	125	21	4	TX R/N/L ...1	172.13	120	170.32	120
R/L 207.2525.1	25	25	150		4	TX R/N/L ...1	181.07	125	179.23	125
R/L 207.1212.2	12	12	100	24	6	TX R/N/L ...2	248.77	212	246.07	212
R/L 207.1616.2	16	16	125	22	6	TX R/N/L ...2	221.97	216	219.62	216
R/L 207.2020.2	20	20	125	21	6	TX R/N/L ...2	172.13	220	170.32	220
R/L 207.2525.2	25	25	150		6	TX R/N/L ...2	181.07	225	179.23	225
R/L 207.1212.3	12	12	100	24	6	TX R/N/L ...3	248.77	312	246.07	312
R/L 207.1616.3	16	16	125	22	6	TX R/N/L ...3	221.97	316	219.62	316
R/L 207.2020.3	20	20	125	21	6	TX R/N/L ...3	172.13	320	170.32	320
R/L 207.2525.3	25	25	150		6	TX R/N/L ...3	181.07	325	179.23	325
R 207.3232.3	32	32	170		6	TX R/N/L ...3			208.31	332
R/L 207.1616.4	16	16	125	22	6	TX R/N/L ...4	221.97	416	221.97	416
R/L 207.2020.4	20	20	125	21	6	TX R/N/L ...4	172.13	420	172.13	420
R/L 207.2525.4	25	25	150		6	TX R/N/L ...4	181.07	425	181.07	425

Spare parts for grooving inserts	right hand		left hand		Key I	Clamping screw	Guide pin		
	73 950 ...	£	73 950 ...	£			73 950 ...	£	
TX R/N/L ...1	50.04	020	50.04	024	2A/28	10.53	028	1.26	030
TX R/N/L ...2	50.04	020	50.04	024	2A/28	10.53	028	1.26	030
TX R/N/L ...3	50.04	020	50.04	024	2A/28	10.53	028	1.26	030
TX R/N/L ...4	55.58	022	55.58	026	2A/28	10.53	028	1.26	030





→ 70-74 → Chapter 16

MonoClamp – Radial TX Grooving holder 0° 8 mm cutting depth

- ▲ For radial parting and grooving
- ▲ Cutting width 1,9 - 6,3 mm

Scope of supply:
Grooving holder only

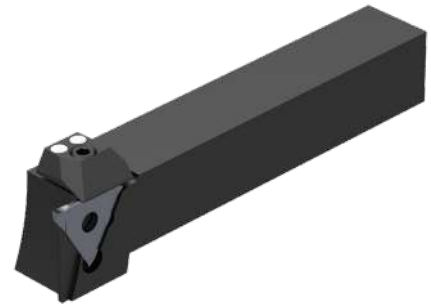

Illustrations show right-hand versions

ISO designation	H mm	B _{+/-0,1} mm	OAL mm	l ₂ mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
							73 503 ...	73 502 ...		
							£ Y6		£ Y6	
R/L 780.2020.2	20	20	125	24	8	TX R/N/L ...2	183.42	120	183.42	120
R/L 780.2525.2	25	25	150		8	TX R/N/L ...2	193.57	125	193.57	125
R/L 780.2020.3	20	20	125	24	8	TX R/N/L ...3	183.42	220	183.42	220
R/L 780.2525.3	25	25	150		8	TX R/N/L ...3	193.57	225	193.57	225
R/L 780.2020.4	20	20	125	24	8	TX R/N/L ...4	183.42	320	183.42	320
R/L 780.2525.4	25	25	150		8	TX R/N/L ...4	193.57	325	193.57	325

Spare parts for grooving inserts	right hand		left hand		Key I		Clamping screw		Guide pin	
	73 950 ...	73 950 ...	73 950 ...	73 950 ...	70 950 ...	73 950 ...	73 950 ...			
	£ Y6	£ Y6	£ Y6	£ Y6	£ 2A/28	£ Y6	£ Y6			
TX R/N/L ...2	50.04	020	50.04	024	2.83 176	10.53 028	1.26 030			
TX R/N/L ...2			50.04	024	2.83 176	10.53 028	1.26 030			
TX R/N/L ...3	50.04	020	50.04	024	2.83 176	10.53 028	1.26 030			
TX R/N/L ...3			50.04	024	2.83 176	10.53 028	1.26 030			
TX R/N/L ...4	55.58	022	55.58	026	2.83 176	10.53 028	1.26 030			
TX R/N/L ...4			55.58	026	2.83 176	10.53 028	1.26 030			





→ 70-74 → Chapter 16

MonoClamp – Radial TX Grooving holder 90° 6 mm cutting depth

- ▲ For radial grooving
- ▲ Cutting width 0,5 - 6,3 mm

Scope of supply:
Grooving holder only

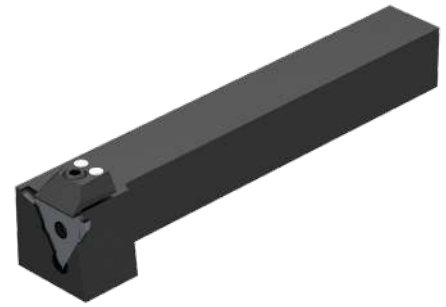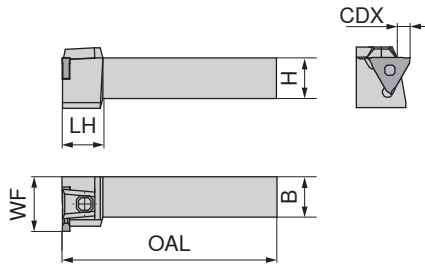

Illustrations show right-hand versions

ISO designation	H mm	B $\pm 0,1$ mm	OAL mm	LH mm	WF $\pm 0,07$ mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
								73 505 ...	73 504 ...		
R/L 738.2020.1	20	20	150	20	27	4	TX R/N/L ...1	£ Y6 214.23	120	£ Y6 214.23	120
R/L 738.2525.1	25	25	150		32	4	TX R/N/L ...1	206.26	125	221.97	125
R/L 738.2020.2	20	20	150	20	27	6	TX R/N/L ...2	214.23	220	214.23	220
R/L 738.2525.2	25	25	150		32	6	TX R/N/L ...2	221.97	225	221.97	225
R/L 738.2020.3	20	20	150	20	27	6	TX R/N/L ...3	217.97	320	214.23	320
R/L 738.2525.3	25	25	150		32	6	TX R/N/L ...3	221.97	325	221.97	325
R/L 738.2020.4	20	20	150	20	27	6	TX R/N/L ...4	214.23	420	208.52	420
R/L 738.2525.4	25	25	150		32	6	TX R/N/L ...4	221.97	425	221.97	425

Spare parts for grooving inserts	right hand		left hand		Key I		Clamping screw		Guide pin	
	73 950 ...	73 950 ...	73 950 ...	73 950 ...	70 950 ...	73 950 ...	73 950 ...			
TX R/N/L ...1	£ Y6 50.04	020	£ Y6 50.04	024	£ 2A/28 2.83	176	M6x20 10.53	028	Ø 4x18 1.26	030
TX R/N/L ...1			50.04	024	2.83	176	10.53	028	1.26	030
TX R/N/L ...2			50.04	024	2.83	176	10.53	028	1.26	030
TX R/N/L ...2	50.04	020			2.83	176	10.53	028	1.26	030
TX R/N/L ...3			50.04	024	2.83	176	10.53	028	1.26	030
TX R/N/L ...3	50.04	020			2.83	176	10.53	028	1.26	030
TX R/N/L ...4	55.58	022			2.83	176	10.53	028	1.26	030
TX R/N/L ...4			55.58	026	2.83	176	10.53	028	1.26	030




→ 70-74 → Chapter 16

MonoClamp – Radial Boring bar TX

- ▲ For radial internal grooving
- ▲ Cutting width 0,5 - 6,3 mm

Scope of supply:
Boring bar only

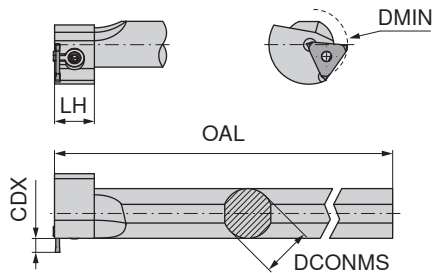

Illustrations show right-hand versions

ISO designation	DCONMS _{gr} mm	DMIN mm	OAL mm	LH mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
							73 511 ...	73 510 ...	£ Y6	£ Y6
R/L 660.0025.1	25	46	170	20	2	TX R/N/L ...1	302.63	125	296.83	125
R/L 660.0032.1	32	46	200	20	2	TX R/N/L ...1	361.90	132	367.71	132
R/L 660.0040.1	40	46	250		2	TX R/N/L ...1	361.90	140	360.91	140
R/L 660.0025.2	25	46	170	20	2	TX R/N/L ...2	297.37	225	296.83	225
R/L 660.0032.2	32	46	200	20	2	TX R/N/L ...2	361.90	232	367.71	232
R/L 660.0040.2	40	46	250		2	TX R/N/L ...2	361.90	240	360.91	240
R/L 660.0025.3	25	46	170	20	2	TX R/N/L ...3	297.37	325	296.83	325
R/L 660.0032.3	32	46	200	20	2	TX R/N/L ...3	361.90	332	367.71	332
R/L 660.0040.3	40	46	250		2	TX R/N/L ...3	361.90	340	360.91	340

Bore-Ø _{min.} in mm	46	50	60	80	100	for grooving insert
CDX _{max.} (mm)	2	3	4	4,5	5	TX R/N/L ...1
	2	3	4	4,5	5	TX R/N/L ...2
	2	3	4	4,5	5	TX R/N/L ...3
	2	3	4	4,5	5	TX R/N/L ...4



Clamping element



Key I



Clamping screw

Spare parts
for grooving inserts



	£ Y6	011	SW3	£ 2A/28	176	M6x30	£ Y6	009
TX R/N/L ...1	61.74	011	SW3	2.83	176	M6x30	10.53	009
TX R/N/L ...2	61.74	011	SW3	2.83	176	M6x30	10.53	009
TX R/N/L ...3	61.74	011	SW3	2.83	176	M6x30	10.53	009



→ 70-73 → Chapter 16

Insert LX

- ▲ Grooving width 8 and 10 mm
- ▲ Axial grooving from Ø 500 mm onwards
- ▲ Internal grooving and turning, from Ø 200 mm onwards




Designation	INSL mm	CW mm	RE mm	PDPT mm	for tool holder	70 337 ...		70 337 ...		70 337 ...	
						£ 1A/15		£ 1A/15		£ 1A/15	
LXE 8.00N0.80-M2	19	8	0.8	5	E32 N ..LX	21.69	928	21.69	578	21.69	682
LXE 10.00N0.80-M2	19	10	0.8	5	E32 N ..LX	28.92	932	28.92	582	28.92	678
P						●		●		●	
M						○		○		○	
K						●		●		●	
N											○
S							○				●
H											
O											○

→ v. Page 103
→ Application recommendation on page 109




Internal machining

External machining

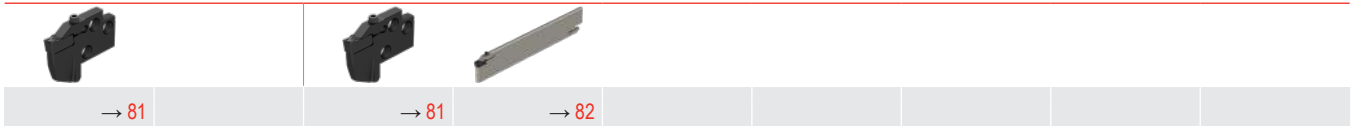

Radial Grooving Insert LX

- ▲ Grooving width 8 mm
- ▲ Axial grooving from Ø 500 mm
- ▲ Internal grooving and turning, from Ø 200 mm

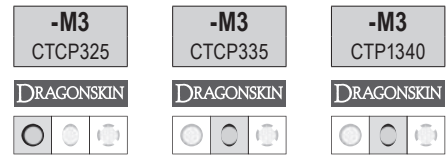


Designation	INSL mm	CW mm <small><i>±0,08</i></small>	CRE mm	PDPT mm	for tool holder	70 337 ...		70 337 ...		70 337 ...	
						£ 1A/15	908	£ 1A/15	518	£ 1A/15	618
LXR 4.00N-M3	19	8	4	5	E32 N ...-LX	23.12	908	23.12	518	23.12	618
P						●		●		●	
M						○		○		○	
K						●		●		●	
N											○
S						○					●
H											
O											○

→ v_c Page 103
→ Application recommendation on page 109

Internal machining


External machining

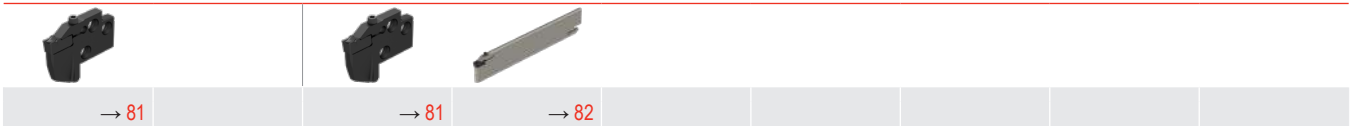

ModularClamp MSS – Axial and radial grooving module LX



- ▲ Grooving width 8 and 10 mm
- ▲ Axial grooving from Ø 500 mm onwards
- ▲ Internal grooving and turning, from Ø 200 mm onwards

Scope of supply:
Grooving module only




Neutral

ISO designation	CW mm	WF mm	LF mm	HF mm	H mm	CDX (1) mm	CDX (2) mm	CDX (3) mm	for grooving inserts	70 835 ...	
										£	032
E32 N 25-LX	8 / 10	3.4	27	32	44	25	19	14	LX ..	2C/71	110.65
E32 N 32-LX	8 / 10	3.4	37	32	44	32	26	21	LX ..	110.65	132
E32 N 45-LX	8 / 10	3.4	47	32	44	45	39	34	LX ..	110.65	232

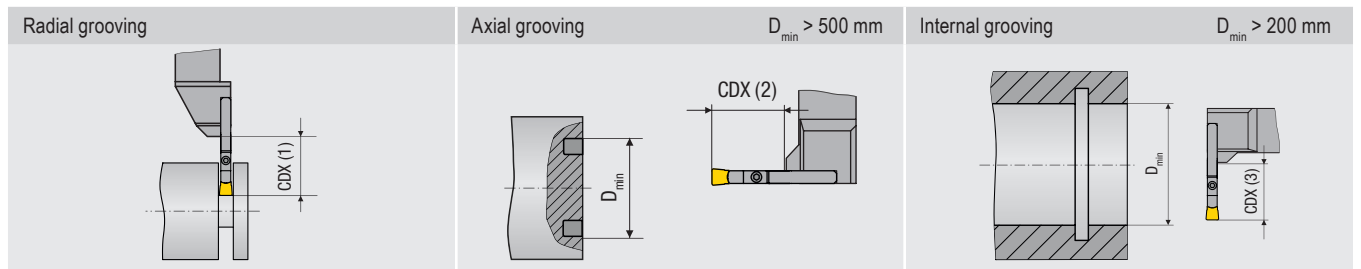

Key D



Clamping screw

**Spare parts
for grooving inserts**
LX ..

80 950 ...		70 950 ...	
£	114	£	204
Y7	16.66	2A/28	5.50
T20		M4x18	




→ 79+80	→ 95+96	→ 95	→ 98					
---------	---------	------	------	--	--	--	--	--

MonoClamp – Blade LX

Scope of supply:

Blade incl. key and clamping screw

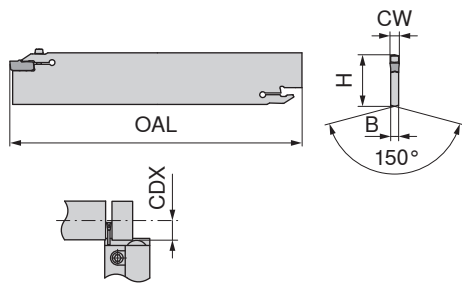

ISO designation	H mm	B mm	OAL mm	CW mm	CDX mm	for grooving inserts
XLCEN 4608-LX	46	6.8	250	8/10	80	LX..

70 833 ...

£
2A/25
290.09

108

**Spare parts
for grooving inserts**

LX ..



Key D



Clamping screw

80 950 ...

£
Y7
16.66

114

70 950 ...

£
2A/28
5.50

204

T20

M4x18



→ 79+80

→ 100+101

→ Chapter 16


Grooving insert AX

- ▲ very good chip control
- ▲ DAXN minimum groove diameter refers to the outside diameter



-F50
CTP1340

DRAGONSKIN

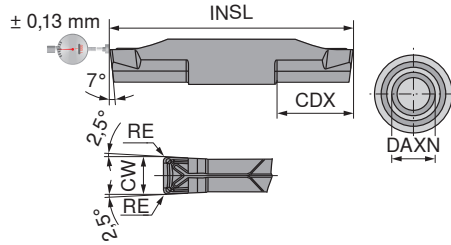

70 327 ...

Designation	IH	INSL	CW ± 0.02	RE ± 0.05	CDX	DAXN	for tool holder
		mm	mm	mm	mm	mm	
AX 05 E3.00 N 0.30	N	24	3	0.3	5	10	E.. R/L.. -AX 05
AX 10 E3.00 N 0.30	N	34	3	0.3	10	20	E.. R/L.. -AX 10
AX 15 E3.00 N 0.30	N	44	3	0.3	15	30	E.. R/L.. -AX 15

£	
1C/72	
31.73	005
32.92	010
34.60	015

P	●
M	●
K	●
N	○
S	●
H	
O	○

→ v. Page 103
→ Application recommendation on page 110

Internal machining


External machining



ModularClamp MSS – Axial grooving module AX



▲ for axial grooving and turning

Scope of supply:
Grooving module only

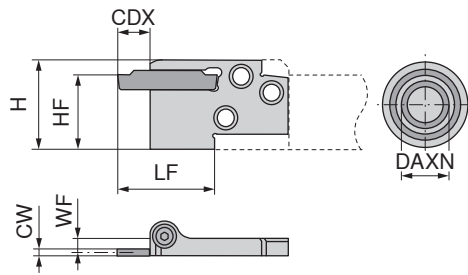

Illustrations show right-hand versions

ISO designation	HF mm	CW mm	WF mm	LF mm	H mm	DAXN mm	CDX mm	for grooving inserts	Left-hand		Right-hand	
									70 827 ...	70 828 ...	£	£
E16 R/L 05-AX 05	16	3	2.5	24.0	20.5	10	5	AX05	2C/71	016	2C/71	016
E20 R/L 05-AX 05	20	3	3.1	28.0	25.0	10	5	AX05	108.93	020	108.93	020
E25 R/L 05-AX 05	25	3	4.6	27.5	30.0	10	5	AX05	110.16	025	110.16	025
E20 R/L 10-AX 10	20	3	3.1	33.0	25.0	20	10	AX10	108.93	120	108.93	120
E25 R/L 10-AX 10	25	3	4.6	32.5	30.0	20	10	AX10	110.16	125	110.16	125
E20 R/L 15-AX 15	20	3	3.1	44.0	25.0	30	15	AX15	108.93	220	108.93	220
E25 R/L 15-AX 15	25	3	4.6	43.5	30.0	30	15	AX15	110.16	225	110.16	225



Spare parts
for Article no.

Article no.	Key D	80 950 ...		70 950 ...	
		£	Y7	£	2A/28
70 827 016 / 70 828 016	T15	15.56	113	M3,5x12,5	10.35 441
70 827 020 / 70 828 020	T15	15.56	113	M4x14	9.90 403
70 827 025 / 70 828 025	T20	16.66	114	M5x18	6.60 404
70 827 120 / 70 828 120	T15	15.56	113	M4x14	9.90 403
70 827 125 / 70 828 125	T20	16.66	114	M5x18	6.60 404
70 827 220 / 70 828 220	T15	15.56	113	M4x14	9.90 403
70 827 225 / 70 828 225	T20	16.66	114	M5x18	6.60 404




→ 83	→ 95+96	→ 97							
------	---------	------	--	--	--	--	--	--	--

MonoClamp – Axial AX Grooving Holder 0°, up to 15 mm groove depth



Scope of supply:

Grooving holder incl. key and clamping screw

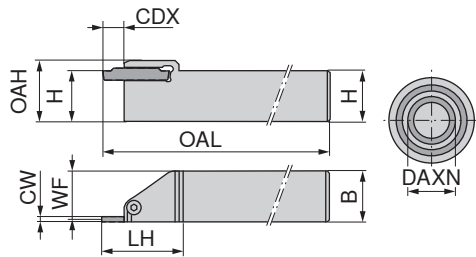


Illustrations show right-hand versions

ISO designation	H mm	B mm	OAL mm	LH mm	OAH mm	CDX mm	CW mm	WF mm	DAXN mm	for grooving inserts	Left-hand		Right-hand	
											70 823 ...	70 824 ...	70 823 ...	70 824 ...
E20 R/L 0005-2020-AX 05	20	20	140	28	25	5	3	18.7	10	AX05	£ 2C/71		£ 2C/71	
E20 R/L 0010-2020-AX 10	20	20	140	38	25	10	3	18.7	20	AX10	152.49	02000	152.49	02000
E20 R/L 0015-2020-AX 15	20	20	140	49	25	15	3	18.7	30	AX15	152.49	22000	152.49	22000
E25 R/L 0005-2525-AX 05	25	25	160	28	30	5	3	23.7	10	AX05	163.35	02500	163.35	02500
E25 R/L 0010-2525-AX 10	25	25	160	38	30	10	3	23.7	20	AX10	163.35	12500	163.35	12500
E25 R/L 0015-2525-AX 15	25	25	160	49	30	15	3	23.7	30	AX15	163.35	22500	163.35	22500



**Spare parts
for Article no.**

		80 950 ...		70 950 ...	
		£		£	
70 824 02000 / 70 823 02000	T20	12.20	106	2A/28	6.60 404
70 824 12000 / 70 823 12000	T20	12.20	106	M5x18	6.60 404
70 824 22000 / 70 823 22000	T20	12.20	106	M5x18	6.60 404
70 824 02500 / 70 823 02500	T20	12.20	106	M5x18	6.60 404
70 824 12500 / 70 823 12500	T20	12.20	106	M5x18	6.60 404
70 824 22500 / 70 823 22500	T20	12.20	106	M5x18	6.60 404




→ 83 → Chapter 16

MonoClamp – Axial AX Grooving Holder 90°, up to 15 mm groove depth



Scope of supply:

Grooving holder incl. key and clamping screw

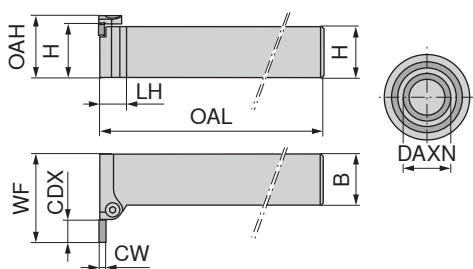


Illustrations show right-hand versions

ISO designation	H mm	B mm	WF mm	OAH mm	OAL mm	LH mm	CDX mm	DAXN mm	CW mm	for grooving inserts	Left-hand		Right-hand	
											70 825 ...	70 826 ...	£	£
E20 R/L 9005-2020-AX 05	20	20	28	25	110	12	5	10	3	AX05	£ 2C/71	02000	£ 2C/71	02000
E20 R/L 9010-2020-AX 10	20	20	38	25	110	13	10	20	3	AX10	£ 152.49	12000	£ 152.49	12000
E20 R/L 9015-2020-AX 15	20	20	49	25	110	13	15	30	3	AX15	£ 152.49	22000	£ 152.49	22000
E25 R/L 9005-2525-AX 05	25	25	33	30	140	12	5	10	3	AX05	£ 163.35	02500	£ 163.35	02500
E25 R/L 9010-2525-AX 10	25	25	43	30	110	13	10	20	3	AX10	£ 163.35	12500	£ 163.35	12500
E25 R/L 9015-2525-AX 15	25	25	49	30	140	13	15	30	3	AX15	£ 163.35	22500	£ 163.35	22500




Spare parts for Article no.

		80 950 ...	70 950 ...
		£	£
70 825 02000 / 70 826 02000	T15	£ 11.89	£ 2A/28
70 825 12000 / 70 826 12000	T20	£ 12.20	£ 9.90
70 825 22000 / 70 826 22000	T20	£ 12.20	£ 6.60
70 825 02500 / 70 826 02500	T15	£ 11.89	£ 9.90
70 825 12500 / 70 826 12500	T20	£ 12.20	£ 6.60
70 825 22500 / 70 826 22500	T20	£ 12.20	£ 6.60



→ 83 → Chapter 16

Threading inserts TC full profile – External thread 60°

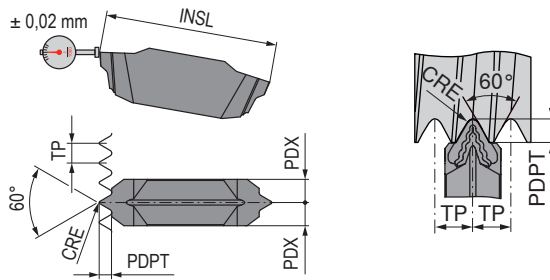

Designation	Size	TP mm	INSL mm	PDPT mm	PDX mm	CRE mm	for tool holder	70 357 ...		70 357 ...		70 357 ...	
								£		£		£	
TC 16-1 E 0.5 ISO	TC 16-1 ...	0.50	16	0.32	1.05	0.06	E.. R/L TC 16-1	1C/84	010	1C/84	110	20.31	610
TC 16-1 E 0.75 ISO	TC 16-1 ...	0.75	16	0.48	1.05	0.09	E.. R/L TC 16-1	25.17	012	25.17	112	20.31	612
TC 16-1 E 1.0 ISO	TC 16-1 ...	1.00	16	0.64	1.05	0.12	E.. R/L TC 16-1	25.17	014	25.17	114	20.31	614
TC 16-1 E 1.25 ISO	TC 16-1 ...	1.25	16	0.80	1.05	0.15	E.. R/L TC 16-1	25.17	016	25.17	116	20.31	616
TC 16-1 E 1.5 ISO	TC 16-1 ...	1.50	16	0.95	1.05	0.18	E.. R/L TC 16-1	25.17	018	25.17	118	20.31	618
TC 16-2 E 1.75 ISO	TC 16-2 ...	1.75	16	1.10	2.15	0.22	E.. R/L/N TC 16-2	25.17	030	25.17	130	20.31	630
TC 16-2 E 2.0 ISO	TC 16-2 ...	2.00	16	1.26	2.15	0.25	E.. R/L/N TC 16-2	25.17	032	25.17	132	20.31	632
TC 16-2 E 2.5 ISO	TC 16-2 ...	2.50	16	1.58	2.15	0.32	E.. R/L/N TC 16-2	25.17	034	25.17	134	20.31	634
TC 16-2 E 3.0 ISO	TC 16-2 ...	3.00	16	1.89	2.15	0.38	E.. R/L/N TC 16-2	25.17	036	25.17	136	20.31	636

P	●	●	
M	●	●	
K	●	●	●
N			●
S	○	●	
H	○		
O			○

→ v. Page 103

→ Application recommendation on page 111

Internal machining


External machining



→ 92

→ 93

Threading inserts TC full profile – Internal thread 60°

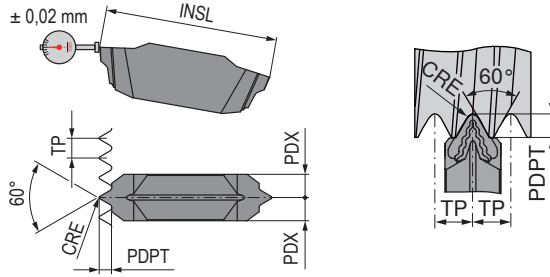

Designation	Size	TP mm	INSL mm	PDPT mm	PDX mm	CRE mm	for tool holder	70 358 ...		70 358 ...		70 358 ...	
								£		£		£	
TC 16-1 1.0 ISO	TC 16-1 ...	1.00	16	0.59	1.05	0.06	I32 R/L TC 16-1	1C/84	014	1C/84	114	1C/84	614
TC 16-1 1.25 ISO	TC 16-1 ...	1.25	16	0.74	1.05	0.07	I32 R/L TC 16-1	25.17	016	25.17	114	20.31	614
TC 16-1 1.5 ISO	TC 16-1 ...	1.50	16	0.89	1.05	0.09	I32 R/L TC 16-1	25.17	018	25.17	118	20.31	618
TC 16-2 1.75 ISO	TC 16-2 ...	1.75	16	1.02	2.15	0.11	I32 R/L TC 16-2	25.17	030				
TC 16-2 2.0 ISO	TC 16-2 ...	2.00	16	1.17	2.15	0.13	I32 R/L TC 16-2	25.17	032	25.17	132	20.31	632
TC 16-2 3.0 ISO	TC 16-2 ...	3.00	16	1.76	2.15	0.19	I32 R/L TC 16-2	25.17	036	25.17	136	20.31	636

P								●		●			
M								●		●			
K								●		●			●
N													●
S								○		●			
H								○					
O													○



→ v_c Page 103
→ Application recommendation on page 111

Internal machining

External machining

→ 94													

Threading inserts TC partial profile 60°

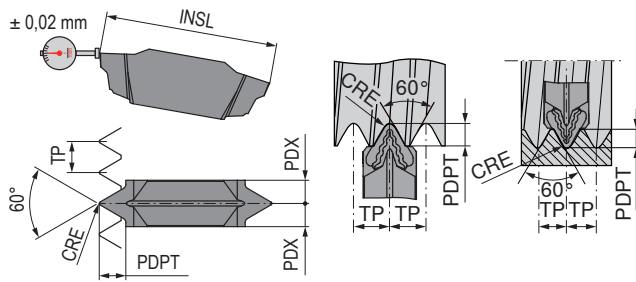


Designation	Size	TP mm	INSL mm	PDPT mm	PDX mm	CRE mm	for tool holder	70 355 ...		70 355 ...		70 355 ...	
								£		£		£	
TC 16-1 EI A 60	TC 16-1 ...	0,5 - 1,5	16	1.27	1.05	0.03	E/I.. R/L TC 16-1	1C/84 25.17	010	1C/84 25.17	110	1C/84 20.31	610
TC 16-2 EI AG 60	TC 16-2 ...	0,5 - 3,0	16	2.57	2.15	0.03	E/I.. R/L/N TC 16-2	25.17	032	25.17	132	20.31	632
TC 16-2 EI G 60	TC 16-2 ...	1,75 - 3,0	16	2.49	2.15	0.11	E/I.. R/L/N TC 16-2	25.17	030	25.17	130	20.31	630
P								●		●			
M								●		●			
K								●		●		●	
N												●	
S								○		●			
H								○					
O													○




→ v_c Page 103
→ Application recommendation on page 111

Internal machining

External machining

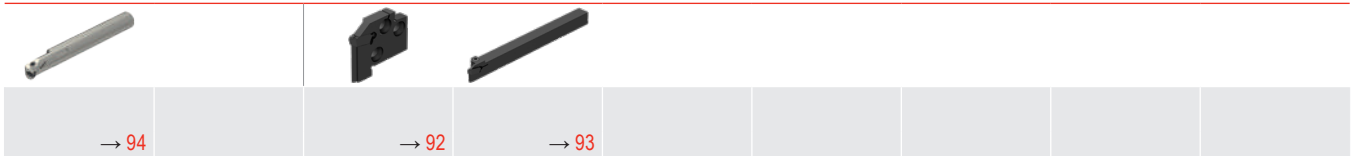

Threading inserts TC full profile 55°

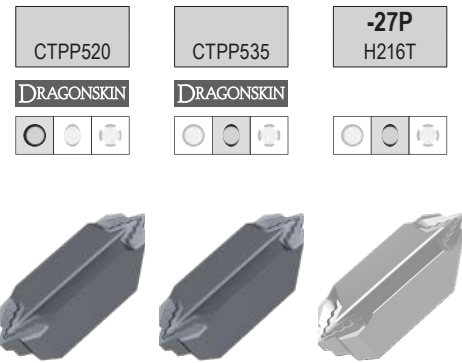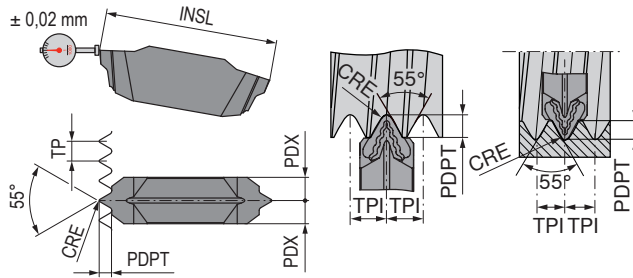


Designation	Size	TPI 1/"	INSL mm	PDPT mm	PDX mm	CRE mm	for tool holder	70 359 ...		70 359 ...		70 359 ...	
								£		£		£	
TC 16-1 EI 28 W	TC 16-1 ...	28	16	0.60	1.05	0.12	E/l.. R/L TC 16-1	1C/84	010	1C/84	110		
TC 16-1 EI 20 W	TC 16-1 ...	20	16	0.84	1.05	0.17	E/l.. R/L TC 16-1	25.17	016	25.17			
TC 16-1 EI 19 W	TC 16-1 ...	19	16	0.88	1.05	0.17	E/l.. R/L TC 16-1	25.17	018	25.17	118	20.31	618
TC 16-1 EI 16 W	TC 16-1 ...	16	16	1.05	1.05	0.21	E/l.. R/L TC 16-1	25.17	022				
TC 16-2 EI 14 W	TC 16-2 ...	14	16	1.20	2.15	0.23	E/l.. R/L/N TC 16-2	25.17	030	25.17	130	20.31	630
TC 16-2 EI 12 W	TC 16-2 ...	12	16	1.40	2.15	0.27	E/l.. R/L/N TC 16-2			25.17	132		
TC 16-2 EI 11 W	TC 16-2 ...	11	16	1.53	2.15	0.30	E/l.. R/L/N TC 16-2	25.17	034	25.17	134	20.31	634
P									●		●		
M									●		●		
K									●		●		●
N													●
S									○		●		
H									○				
O													○




→ v. Page 103
→ Application recommendation on page 111

Internal machining

External machining

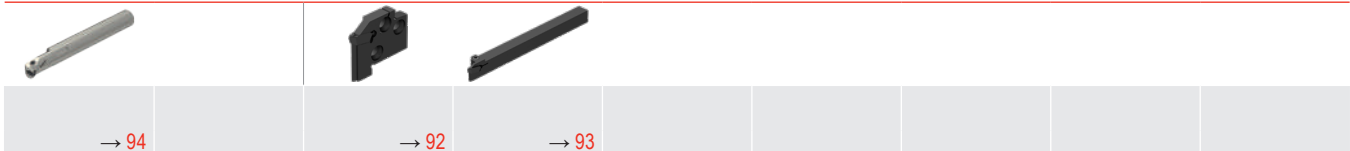

Threading inserts TC partial profile 55°

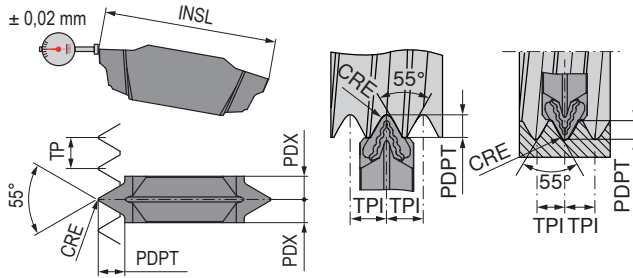


Designation	Size	TPI 1/"	INSL mm	PDPT mm	PDX mm	CRE mm	for tool holder	70 356 ...		70 356 ...	
								£		£	
TC 16-1 EI A 55	TC 16-1 ...	28 - 16	16	1.39	1.05	0.12	E/l.. R/L TC 16-1	1C/84 25.17	010	1C/84 25.17	110
TC 16-2 EI AG 55	TC 16-2 ...	28 - 8	16	2.91	2.15	0.12	E/l.. R/L/N TC 16-2	25.17	032	25.17	132
TC 16-2 EI G 55	TC 16-2 ...	14 - 8	16	2.78	2.15	0.23	E/l.. R/L/N TC 16-2	25.17	030	25.17	130
P									●		●
M									●		●
K									●		●
N											
S									○		●
H									○		
O											

→ v. Page 103
→ Application recommendation on page 111


Internal machining

External machining

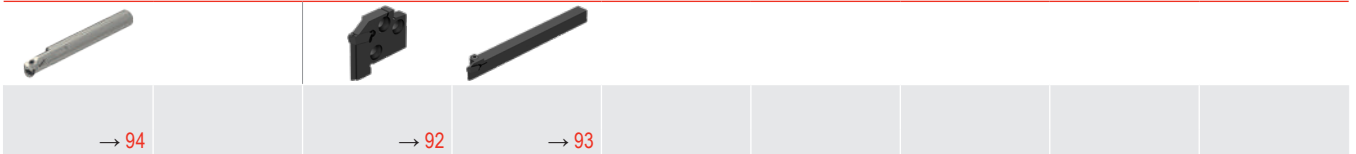

ModularClamp MSS – Threading module TC for external threads

Scope of supply:
Grooving module only



Illustrations show right-hand versions

ISO designation	TP mm	TPI 1/"	WF mm	HF mm	LF mm	H mm	CODX mm	CDX mm	for grooving inserts	Left-hand	Neutral	Right-hand			
										70 872 ... £	70 872 ... £	70 872 ... £			
E20 R/L TC 16-1	0,5 - 1,5	28 - 16	3.45	13	20	24	60	8	TC 16-1 ...	99.14	120	2C/82	99.14	020	
E20 N TC 16-2	1,75 - 3,0	14 - 8	2.20	13	20	24		12	TC 16-2 ...			99.14	220		
E25 R/L TC 16-1	0,5 - 1,5	28 - 16	5.20	13	25	30	75	8	TC 16-1 ...	99.87	125			99.87	025
E25 R/L TC 16-2	1,75 - 3,0	14 - 8	4.10	13	25	30	75	10	TC 16-2 ...	99.87	325			99.87	225





→ 87-91	→ 95+96	→ 97										
---------	---------	------	--	--	--	--	--	--	--	--	--	--

MonoClamp – Monoholder TC – external thread

Scope of supply:

Mono holder incl. key and clamping screw

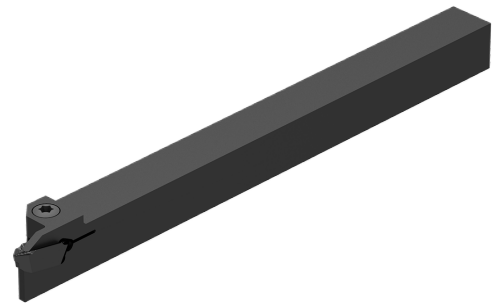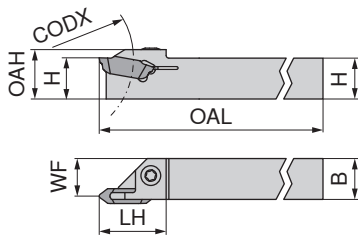

Illustrations show right-hand versions

ISO designation	TP mm	TPI 1/"	H mm	B mm	OAL mm	LH mm	OAH mm	WF mm	CODX mm	for grooving inserts TC16-1/2..	Left-hand		Right-hand	
											70 883 ...	70 882 ...		
E12 R/L 00-1212 TC16	0,5 - 3	28 - 8	12	12	150	20	14,5	11	30	TC16-1/2..	£ 2C/83 147.08	012	£ 2C/83 147.08	012

**Spare parts
for grooving inserts**

TC16-1/2..

	Key D		Clamping screw	
	80 950 ...	70 950 ...		
	£ Y7 15.56	£ 2A/28 11.94		
T15	113	M4x11	442	




→ 87-91	→ Chapter 16									
---------	--------------	--	--	--	--	--	--	--	--	--

MonoClamp – Monobloc boring bar TC – internal thread



Scope of supply:

Boring bar incl. key and clamping screw

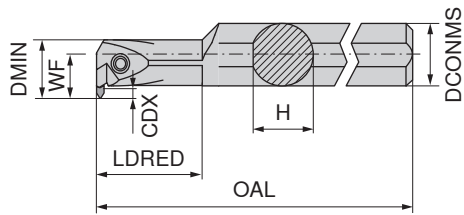

Illustrations show right-hand versions

ISO designation	WF mm	DCONMS mm	H mm	OAL mm	LDRED mm	CDX mm	DMIN mm	for grooving inserts	Left-hand		Right-hand	
									70 857 ...	70 856 ...		
I16 R/L 90-2D TC16	14.0	20	18	180	32	4	20	TC16-1/2..	£ 2C/83		£ 2C/83	
I20 R/L 90-2D TC16	17.5	25	23	200	40	5	25	TC16-..	160.11	016	160.11	016
I25 R/L 90-2D TC16	22.0	32	30	250	50	6	32	TC16-..	176.39	020	176.39	020
									199.59	025	199.59	025



Spare parts

for Article no.

Article no.	Key D	Clamping screw
70 857 016 / 70 856 016	T15	M4x14
70 857 020 / 70 856 020	T20	M5x18
70 857 025 / 70 856 025	T25	M6x20





→ 87-91 → Chapter 16

ModularClamp MSS – Tool holder 0°

Scope of supply:

Base holder incl. clamping screw

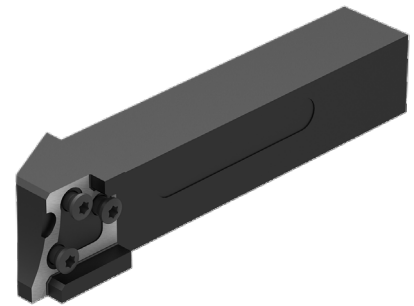
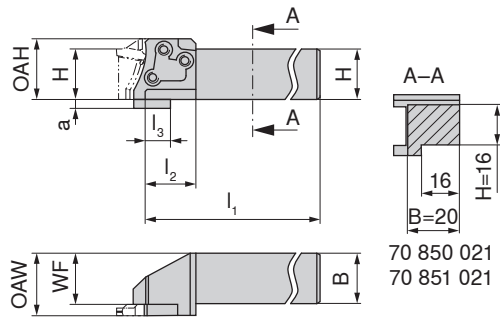


Illustrations show right-hand versions

ISO designation	H mm	B mm	OAW mm	OAH mm	WF mm	l ₁ mm	l ₂ mm	l ₃ mm	for modules	Left-hand	Right-hand
										70 851 ...	70 850 ...
E16 R/L 00-1616G	16	16	19.25	19.5	15.75	90	16		E16 R/L ...	£ 2C/71 152.95	£ 2C/71 152.95
E20 R/L 00-1620G	16	20	24.25	24.0	20.15	90	20		E20 R/L ...	£ 154.36	£ 154.36
E20 R/L 00-2020J	20	20	24.25	24.0	20.15	110	20		E20 R/L ...	£ 154.36	£ 154.36
E25 R/L 00-2525L	25	25	31.00	30.0	25.50	140	25		E25 R/L ...	£ 157.56	£ 157.56
E32 R/L 00-3225N	32	25	31.00	38.0	25.50	160	32		E32 R/L ...	£ 161.83	£ 161.83
E32 L 00-3232N	32	32	38.00	38.8	32.50	180	32	16	E32 R/L ...	£ 164.62	£ 164.62
E32 R 00-3232Q	32	32	38.00	38.8	32.50	180	32	16	E32 R/L ...	£ 164.62	£ 164.62

1) see view A-A

1 For right hand holder → left hand module only
For left hand holder → right hand module only



Spare parts for Article no.		80 950 ...		70 950 ...	
		£ Y7		£ 2A/28	
70 851 016 / 70 850 016	T15	15.56	113	M3,5x12,5	10.35 441
70 851 021 / 70 850 021	T15	15.56	113	M4x14	9.90 403
70 851 020 / 70 850 020	T15	15.56	113	M4x14	9.90 403
70 851 025 / 70 850 025	T20	16.66	114	M5x18	6.60 404
70 851 032 / 70 850 032	T25	17.13	115	M6x20	4.89 405

Module Overview





→ 6+8

ModularClamp MSS – Tool holder 90°

Scope of supply:



Base holder incl. clamping screw

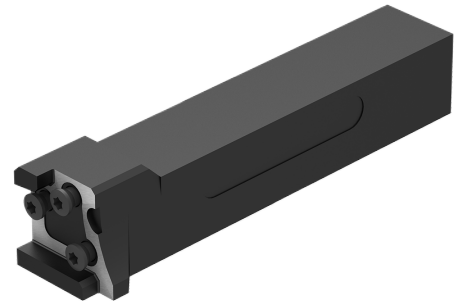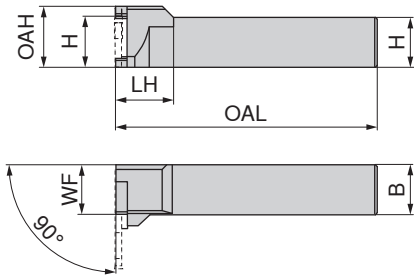

Illustrations show right-hand versions

ISO designation	H mm	B mm	OAH mm	WF mm	OAL mm	LH mm	for modules	Left-hand		Right-hand	
								70 855 ...	70 854 ...		
E20 R/L 90-2020J	20	20	24	20	110	20	E20 R/L ...	£ 2C/71 154.36	020	£ 2C/71 154.36	020
E25 R/L 90-2525L	25	25	30	25	140	28	E25 R/L ...	157.56	025	157.56	025
E32 R/L 90-3225N	32	25	38	32	160	34	E32 R/L ...	161.83	032	161.83	032

i For right hand holder → left hand module only
For left hand holder → right hand module only



**Spare parts
for Article no.**

Article no.	80 950 ...	70 950 ...
70 855 020 / 70 854 020	T15 15.56 113	M4x14 9.90 403
70 855 025 / 70 854 025	T20 16.66 114	M5x18 6.60 404
70 855 032 / 70 854 032	T25 17.13 115	M6x20 4.89 405

Module Overview




→ 6+8

ModularClamp MSS – HSK – T Base Holder 0°

Scope of supply:

Base holder incl. clamping screw



Illustrations show right-hand versions

ISO designation	Adapter	LF mm	l ₂ mm	BDRED mm	WF mm	for modules	Left-hand		Right-hand	
							74 581 ...	74 580 ...	74 581 ...	74 580 ...
HSK T63 E25 R/L 00	HSK-T 63	67	42	53	38.7	E25 R/L...	£ 2D/80 609.08	525	£ 2D/80 609.08	525

i For right hand holder → left hand module only
For left hand holder → right hand module only

Spare parts for Article no.	Protection plugs	Nozzle	Key D	Clamping screw	Hollow key with nose
74 580 525 / 74 581 525	70 950 ... £ 2A/28 23.32	70 950 ... £ 2A/28 33.54	80 950 ... £ Y7 16.66	70 950 ... £ 2A/28 6.60	70 950 ... £ 2A/28 51.85
	05600	05500	114	404	05700

Module Overview




→ 6+8

ModularClamp MSS – Boring bars GX / TC

▲ with thro' coolant

Scope of supply:


Boring bar incl. clamping screw




Illustrations show right-hand versions

	ISO designation	DCONMS mm	DF mm	WF mm	H mm	OAL mm	LDRED mm	LS mm	for modules	Left-hand 70 861 ...		Right-hand 70 860 ...	
										£		£	
≤ 1,5xD	I16 R/L 90-1,5 D-N	20	25	1.0		32	24	50	I 16 R/L	169.00	017	169.00	017
	I20 R/L 90-1,5 D-N	20	25	1.0		37	30	50	I 20 R/L	207.09	021	207.09	021
	I25 R/L 90-1,5 D-N	25	32	1.5		46	38	56	I 25 R/L	237.35	026	237.35	026
	I32 R/L 90-1,5 D-N	32	40	2.0		59	48	60	I 32 R/L	306.03	033 ¹⁾	306.03	033 ¹⁾
	I40 R/L 90-1,5 D-N	40	50	2.5		72	60	70	I 40 R/L/N	381.66	041	381.66	041
≤ 2,5xD	I16 R/L 90-2,5 D-N	20		4.5	19.0	180	40		I 16 R/L	182.16	117	182.16	117
	I20 R/L 90-2,5 D-N	25		6.0	24.0	200	50		I 20 R/L	221.52	121	221.52	121
	I25 R/L 90-2,5 D-N	32		7.0	31.0	250	63		I 25 R/L	253.51	126	253.51	126
	I32 R/L 90-2,5 D-N	40		9.5	38.0	300	80		I 32 R/L	330.63	133 ¹⁾	330.63	133 ¹⁾
	I40 R/L 90-2,5 D-N	50		11.5	48.5	350	100		I 40 R/L/N	421.03	141	421.03	141

1) with 2 clamping surfaces



Key D




Clamping screw

Spare parts for modules

		80 950 ...		70 950 ...	
		£		£	
I 16 R/L	T08	13.09	110	2A/28	440
I 20 R/L	T10	15.30	112	M2,5x10	8.19
I 25 R/L	T15	15.56	113	M3x11	8.48
I 32 R/L	T20	16.66	114	M3,5x12,5	10.35
I 40 R/L/N	T20	16.66	114	M4,5x17	9.42
				M5x18	6.60


Module Overview

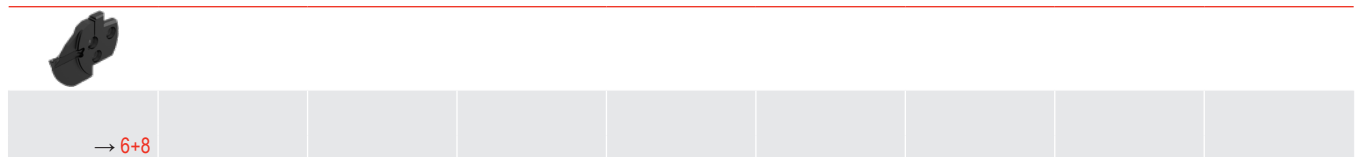

Split clamping block for blades DC

Scope of supply:

Complete clamping block, but without blade

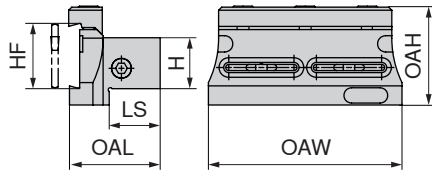

Designation	H mm	HF mm	OAH mm	LS mm	OAL mm	OAW mm	for blades	70 829 ...	
								£	
SBN 2020-26-DC	20	26	43.0	20	40.0	82	XLC.. 26..	275.91	020
SBN 2020-32-DC	20	32	43.0	20	40.0	95	XLC.. 32..	275.91	120
SBN 2525-32-DC	25	32	48.5	25	44.5	95	XLC.. 32..	284.56	025
SBN 3232-32-DC	32	32	52.0	32	51.0	95	XLC.. 32..	297.84	032


Spare parts for Article no.	Coolant screw plug		Clamping rail		clamping screw	
	£		£		£	
70 829 020	2A/28		70 950 ...		70 950 ...	
70 829 120	4.11	294	37.29	290	2.57	861
70 829 025	4.11	294	37.29	291	2.57	861
70 829 032	4.11	294	37.29	291	2.57	861

Spare parts for Article no.	Key I		O-Ring		O-Ring	
	£		£		£	
70 829 020	2A/28		70 950 ...		70 950 ...	
70 829 120	4.26	265	4.97	293	4.97	292
70 829 025	4.26	265	4.97	293	4.97	292
70 829 032	4.26	265			4.97	292

Clamping block for blades GX/LX/FX/SX

Scope of supply:

Clamping block complete, but without blade and coolant set

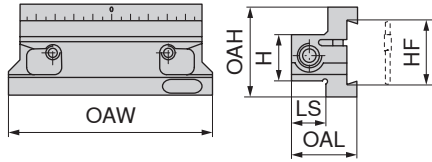


Designation	H mm	HF mm	OAH mm	LS mm	OAL mm	OAW mm	for blades	70 830 ...	
								£	
SBN 2020-26-K	20	26	39	20	33.0	90	XLC.. 26..	189.44	020
SBN 2520-32-K	25	32	48	20	36.0	110	XLC.. 32..	189.44	025
SBN 3229-32-K	32	32	48	29	44.5	120	XLC.. 32..	193.59	032
SBN 3229-46-K	32	46	70	29	52.0	150	XLC.. 46..	320.46	132
SBN 4037-46-K	40	46	70	37	60.0	150	XLC.. 46..	389.03	140

Spare parts for blades		Key I		Cooling agent set		clamping screw	
		70 950 ...	£	70 950 ...	£	70 950 ...	£
XLC.. 26..	SW5	2A/28	4.26	2A/28	48.24	M6x25	2.37
XLC.. 32..	SW5	2A/28	4.26	2A/28	48.24	M6x25	2.37
XLC.. 46..	SW6	2A/28	5.97	2A/28	46.98	M8x35	2.37

Split clamping block for blades GX/LX/FX/SX

Scope of supply:

Clamping block complete, but without blade and coolant set

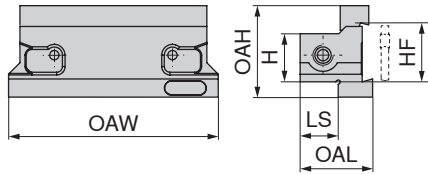

Designation	H mm	HF mm	OAH mm	LS mm	OAL mm	OAW mm	for blades	70 831 ...	
								£	
SBN 2020-26-KS	20	26	39	20	35.0	90	XLC.. 26..	2A/25	020
SBN 2520-32-KS	25	32	48	20	38.0	110	XLC.. 32..	237.35	025
SBN 3229-32-KS	32	32	48	29	46.5	120	XLC.. 32..	246.25	032

Spare parts for blades			Key I		Cooling agent set		clamping screw			
			70 950 ...	£	70 950 ...	£	70 950 ...	£		
XLC.. 26..	SW5	265	2A/28	4.26	2A/28	48.24	278	M6x25	2.37	269
XLC.. 32..	SW5	265	2A/28	4.26	2A/28	48.24	278	M6x25	2.37	269


Material examples for cutting data tables

	Material sub-group	Index	Composition / Structure / Heat treatment	Tensile strength N/mm ² / HB / HRC	Material number	Material designation	Material number	Material designation
P	Unalloyed steel	P.1.1	< 0,15 % C Annealed	420 N/mm ² / 125 HB	1.0401	C15	1.1141	Ck15
		P.1.2	< 0,45 % C Annealed	640 N/mm ² / 190 HB	1.1191	C45E	1.0718	9SMnPb28
		P.1.3	< 0,45 % C Tempered	840 N/mm ² / 250 HB	1.1191	C45E	1.0535	C55
		P.1.4	< 0,75 % C Annealed	910 N/mm ² / 270 HB	1.1223	C60R	1.0535	C55
		P.1.5	< 0,75 % C Tempered	1010 N/mm ² / 300 HB	1.1223	C60R	1.0727	45S20
	Low-alloy steel	P.2.1	Annealed	610 N/mm ² / 180 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.2	Tempered	930 N/mm ² / 275 HB	1.7131	16MnCr5	1.6587	17CrNiMo6
		P.2.3	Tempered	1010 N/mm ² / 300 HB	1.7225	42CrMo4	1.3505	100Cr6
		P.2.4	Tempered	1200 N/mm ² / 375 HB	1.7225	42CrMo4	1.3505	100Cr6
	High-alloy steel and high-alloy tool steel	P.3.1	Annealed	680 N/mm ² / 200 HB	1.4021	X20Cr13	1.4034	X46Cr13
		P.3.2	Hardened and tempered	1100 N/mm ² / 300 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
		P.3.3	Hardened and tempered	1300 N/mm ² / 400 HB	1.2343	X38CrMoV5-1	1.4034	X46Cr13
	Stainless steel	P.4.1	Ferritic / martensitic Annealed	680 N/mm ² / 200 HB	1.4016	X6Cr17	1.2316	X36CrMo16
		P.4.2	Martensitic Tempered	1010 N/mm ² / 300 HB	1.4112	X90CrMoV18	1.2316	X36CrMo16
M	Stainless steel	M.1.1	Austenitic / austenitic-ferritic Quenched	610 N/mm ² / 180 HB	1.4301	X5CrNi18-10	1.4571	X6CrNiMoTi17-12-2
		M.2.1	Austenitic Tempered	300 HB	1.4841	X15CrNiSi25-21	1.4539	X1NiCrMoCu25-20-5
		M.3.1	Austenitic / ferritic (Duplex)	780 N/mm ² / 230 HB	1.4462	X2CrNiMoN22-5-3	1.4501	X2CrNiMoCuWN25-7-4
K	Grey cast iron	K.1.1	Pearlitic / ferritic	350 N/mm ² / 180 HB	0.6010	GG-10	0.6025	GG-25
		K.1.2	Pearlitic (martensitic)	500 N/mm ² / 260 HB	0.6030	GG-30	0.6045	GG-45
	Spherulitic graphite cast iron	K.2.1	Ferritic	540 N/mm ² / 160 HB	0.7040	GGG-40	0.7060	GGG-60
		K.2.2	Pearlitic	845 N/mm ² / 250 HB	0.7070	GGG-70	0.7080	GGG-80
	Malleable iron	K.3.1	Ferritic	440 N/mm ² / 130 HB	0.8035	GTW-35-04	0.8045	GTW-45
		K.3.2	Pearlitic	780 N/mm ² / 230 HB	0.8165	GTS-65-02	0.8170	GTS-70-02
N	Aluminium wrought alloy	N.1.1	Non-hardenable	60 HB	3.0255	Al99,5	3.3315	AlMg1
		N.1.2	Hardenable Age-hardened	340 N/mm ² / 100 HB	3.1355	AlCuMg2	3.2315	AlMgSi1
	Cast aluminium alloy	N.2.1	≤ 12 % Si, non-hardenable	250 N/mm ² / 75 HB	3.2581	G-AlSi12	3.2163	G-AlSi9Cu3
		N.2.2	≤ 12 % Si, hardenable Age-hardened	300 N/mm ² / 90 HB	3.2134	G-AlSi5Cu1Mg	3.2373	G-AlSi9Mg
		N.2.3	> 12 % Si, non-hardenable	440 N/mm ² / 130 HB		G-AlSi17Cu4Mg		G-AlSi18CuNiMg
	Copper and copper alloys (bronze/brass)	N.3.1	Free-machining alloys, PB > 1 %	375 N/mm ² / 110 HB	2.0380	CuZn39Pb2 (Ms58)	2.0410	CuZn44Pb2
		N.3.2	CuZn, CuSnZn	300 N/mm ² / 90 HB	2.0331	CuZn15	2.4070	CuZn28Sn1As
		N.3.3	CuSn, lead-free copper and electrolytic copper	340 N/mm ² / 100 HB	2.0060	E-Cu57	2.0590	CuZn40Fe
	Magnesium alloys	N.4.1	Magnesium and magnesium alloys	70 HB	3.5612	MgAl6Zn	3.5312	MgAl3Zn
	S	Heat-resistant alloys	S.1.1	Fe - basis Annealed	680 N/mm ² / 200 HB	1.4864	X12NiCrSi 36-16	1.4865
S.1.2			Fe - basis Age-hardened	950 N/mm ² / 280 HB	1.4980	X6NiCrTiMoVB25-15-2	1.4876	X10NiCrAlTi32-20
S.2.1			Ni or Co basis Annealed	840 N/mm ² / 250 HB	2.4631	NiCr20TiAl (Nimonic80A)	3.4856	NiCr22Mo9Nb
S.2.2			Ni or Co basis Age-hardened	1180 N/mm ² / 350 HB	2.4668	NiCr19Nb5Mo3 (Inconel 718)	2.4955	NiFe25Cr20NbTi
S.2.3			Ni or Co basis Cast	1080 N/mm ² / 320 HB	2.4765	CoCr20W15Ni	1.3401	G-X120Mn12
Titanium alloys		S.3.1	Pure titanium	400 N/mm ²	3.7025	Ti99,8	3.7034	Ti99,7
		S.3.2	Alpha + beta alloys Age-hardened	1050 N/mm ² / 320 HB	3.7165	TiAl6V4	Ti-6246	Ti-6Al-2Sn-4Zr-6Mo
S.3.3	Beta alloys	1400 N/mm ² / 410 HB	Ti555.3	Ti-5Al-5V-5Mo-3Cr	R56410	Ti-10V-2Fe-3Al		
H	Hardened steel	H.1.1	Hardened and tempered	46–55 HRC				
		H.1.2	Hardened and tempered	56–60 HRC				
		H.1.3	Hardened and tempered	61–65 HRC				
		H.1.4	Hardened and tempered	66–70 HRC				
	Chilled iron	H.2.1	Cast	400 HB				
Hardened cast iron	H.3.1	Hardened and tempered	55 HRC					
O	Non-metal materials	O.1.1	Plastics, duroplastic	≤ 150 N/mm ²				
		O.1.2	Plastics, thermoplastic	≤ 100 N/mm ²				
		O.2.1	Aramid fibre-reinforced	≤ 1000 N/mm ²				
		O.2.2	Glass/carbon-fibre reinforced	≤ 1000 N/mm ²				
		O.3.1	Graphite					

* Tensile strength


Cutting data values for grooving inserts GX/LX/FX/SX/AX/TC

Index	DRAGONSKIN						H216T (SX/FX/GX)	H216T (TC)
	CTCP325	CTCP335	CTPP345	CTPP520	CTPP535	CTP1340		
	v _c in m/min.							
P.1.1	220	185	135	235	180	180		
P.1.2	195	160	120	205	150	150		
P.1.3	170	140	105	175	125	125		
P.1.4	165	130	100	165	120	115		
P.1.5	150	120	95	150	105	100		
P.2.1	200	165	120	210	160	155		
P.2.2	160	130	100	160	115	110		
P.2.3	150	120	95	150	105	100		
P.2.4	120	90	75	115	75	70		
P.3.1	150	130	100	185	120	110		
P.3.2	95	90	80	130	90	75		
P.3.3	45	50	60	75	60	40		
P.4.1	150	130	100	185	120	110		
P.4.2	125	110	90	160	105	95		
M.1.1	150	130	100	185	120	110		
M.2.1	95	90	80	130	90	80		
M.3.1	135	115	95	170	110	100		
K.1.1	170	135		140	165	150	140	140
K.1.2	150	115		115	150	125	115	115
K.2.1	160	130		180	145	140	150	150
K.2.2	145	105		115	155	120	110	110
K.3.1	210	150		130	190	170	170	170
K.3.2	140	115		110	145	120	140	140
N.1.1						300	400	450
N.1.2						200	400	450
N.2.1						300	450	300
N.2.2						200	450	300
N.2.3						150	500	225
N.3.1						300	425	190
N.3.2						300	400	290
N.3.3						200	275	290
N.4.1						200	225	290
S.1.1	35			40	30	35	40	
S.1.2	30		30	30	25	30	30	
S.2.1	20		25	20	15	20	30	
S.2.2	15			15	15	15	25	
S.2.3	15			20	15	15	20	
S.3.1				125	85	85	90	
S.3.2				50	35	40	55	
S.3.3				35	25	30	40	
H.1.1				15				
H.1.2				15				
H.1.3								
H.1.4								
H.2.1				15				
H.3.1				40				
O.1.1						130	130	290
O.1.2								
O.2.1						105	105	290
O.2.2								
O.3.1								

 The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. ±20% according to the usage conditions.

Cutting data values for TX grooving inserts

Index	CWX500		● 1st choice ○ suitable		
	v_c (m/min)	f (mm/rev)	Emulsion	Compressed air	MMS
P.1.1	160	0,03–0,10	●		
P.1.2	140	0,03–0,10	●		
P.1.3	110	0,03–0,10	●		
P.1.4	110	0,03–0,10	●		
P.1.5	90	0,03–0,10	●		
P.2.1	110	0,03–0,10	●		
P.2.2	90	0,03–0,10	●		
P.2.3	90	0,03–0,07	●		
P.2.4	80	0,03–0,06	●		
P.3.1	80	0,03–0,07	●		
P.3.2	60	0,03–0,07	●		
P.3.3	50	0,03–0,07	●		
P.4.1	100	0,03–0,06	●		
P.4.2	90	0,03–0,06	●		
M.1.1	110	0,02–0,06	●		
M.2.1	90	0,02–0,06	●		
M.3.1	70	0,02–0,06	●		
K.1.1	140	0,03–0,10	●		
K.1.2	100	0,03–0,10	●		
K.2.1	90	0,03–0,10	●		
K.2.2	80	0,03–0,10	●		
K.3.1	140	0,03–0,10	●		
K.3.2	120	0,03–0,10	●		
N.1.1	330	0,05–0,12	●		
N.1.2	310	0,05–0,12	●		
N.2.1	270	0,05–0,12	●		
N.2.2	230	0,05–0,12	●		
N.2.3	140	0,05–0,12	●		
N.3.1	240	0,05–0,12	●		
N.3.2	200	0,05–0,12	●		
N.3.3	180	0,05–0,12	●		
N.4.1	180	0,05–0,12	●		
S.1.1	60	0,02–0,07	●		
S.1.2	50	0,02–0,08	●		
S.2.1	60	0,02–0,09	●		
S.2.2	50	0,02–0,10	●		
S.2.3	40	0,02–0,11	●		
S.3.1	60	0,02–0,12	●		
S.3.2	40	0,02–0,13	●		
S.3.3	30	0,02–0,14	●		
H.1.1	50	0,01–0,07	●		
H.1.2					
H.1.3					
H.1.4					
H.2.1					
H.3.1					
O.1.1	180	0,05–0,12	●		
O.1.2	180	0,05–0,12	●		
O.2.1	150	0,05–0,12	●		
O.2.2	110	0,05–0,12	●		
O.3.1	170	0,03–0,10	●		

 The cutting data is strongly influenced by external conditions, such as the stability of the tool and workpiece clamping, material and type of machine. The specified values represent guideline cutting data that can be adjusted by approx. ±20% according to the usage conditions.

GX – Depths of cut and feed rates

GX Standard / GX-E

Turning



Parting / Grooving



GX Standard / GX-E	Depth of Cut a_p in mm							GX Standard / GX-E
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	
Cutting width in mm	Feed rate f in mm/rev.							Feed rate f in mm/rev.
2	0,10–0,15	0,05–0,15	0,05–0,12	0,05–0,10				0,05–0,20
3	0,10–0,17	0,05–0,17	0,05–0,17	0,05–0,15	0,05–0,12			0,10–0,25
4	0,10–0,20	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,17	0,07–0,15		0,10–0,25
5	0,10–0,25	0,10–0,25	0,07–0,25	0,07–0,25	0,07–0,22	0,07–0,20		0,10–0,30
6	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,25	0,15–0,22	0,15–0,35

When axial grooving reduce feed by 40%.

GX-F2

Turning



Parting / Grooving



GX-F2	Depth of Cut a_p in mm									GX-F2
	0,50	0,75	1,00	1,25	1,50	1,75	2,00	2,25	2,50	
Cutting width in mm	Feed rate f in mm/rev.									Feed rate f in mm/rev.
2	0,03–0,15	0,03–0,15	0,03–0,15	0,03–0,10						0,05–0,15
3	0,04–0,17	0,04–0,17	0,04–0,17	0,04–0,15	0,04–0,13	0,04–0,12				0,075–0,20
4	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,17	0,05–0,15			0,10–0,25
5	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,20	0,07–0,17	0,07–0,15		0,10–0,30
6	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,23	0,10–0,19	0,10–0,15	0,15–0,325

When axial grooving reduce feed by 40%.

GX-M40

Turning



Parting / Grooving



GX-M40	Depth of Cut a_p in mm								GX-M40
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	
Cutting width in mm	Feed rate f in mm/rev.								Feed rate f in mm/rev.
2	0,10–0,20	0,05–0,20	0,05–0,17	0,05–0,15					0,05–0,15
3	0,10–0,22	0,10–0,22	0,10–0,21	0,10–0,20	0,10–0,17				0,075–0,20
4	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,22	0,10–0,17			0,10–0,25
5	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,27	0,10–0,23	0,10–0,20		0,10–0,30
6	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,32	0,10–0,27	0,10–0,23	0,10–0,20	0,15–0,325

When axial grooving reduce feed by 40%.

GX-27P

Turning



Parting / Grooving



GX-27P	Depth of Cut a_p in mm								GX-27P
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	
Cutting width in mm	Feed rate f in mm/rev.								Feed rate f in mm/rev.
2	0,05–0,23	0,05–0,23	0,05–0,23	0,05–0,20					0,05–0,20
3	0,05–0,25	0,05–0,25	0,05–0,25	0,05–0,25	0,05–0,20				0,05–0,25
4	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,25			0,05–0,30
5	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,35	0,10–0,32	0,10–0,30		0,10–0,35
6	0,10–0,40	0,10–0,40	0,10–0,40	0,10–0,40	0,10–0,40	0,10–0,36	0,10–0,33	0,10–0,30	0,10–0,40

When axial grooving reduce feed by 40%.

GX – Depths of cut and feed rates

GX-M3

Turning



Parting / Grooving



GX-M3	Depth of Cut a_p in mm							
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0
Radius RE in mm	Feed rate f in mm/rev.							
1,5	0,15–0,35	0,15–0,35	0,15–0,30					
2	0,15–0,40	0,15–0,40	0,15–0,40	0,15–0,30				
2,5	0,15–0,50	0,15–0,50	0,15–0,50	0,15–0,40	0,15–0,35			
3	0,20–0,70	0,20–0,70	0,20–0,70	0,20–0,60	0,20–0,50	0,20–0,40		

GX-M3
Feed rate f in mm/rev.
0,05–0,20
0,10–0,25
0,10–0,25
0,10–0,35

GX-M33

Turning



Parting / Grooving



GX-M33	Depth of Cut a_p in mm							
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0
Radius RE in mm	Feed rate f in mm/rev.							
1,5	0,05–0,25	0,05–0,20	0,05–0,15					
2	0,05–0,35	0,05–0,30	0,05–0,25	0,05–0,20				
2,5	0,10–0,45	0,10–0,40	0,10–0,35	0,10–0,30	0,10–0,25			
3	0,10–0,50	0,10–0,45	0,10–0,40	0,10–0,35	0,10–0,30	0,10–0,25		

GX-M33
Feed rate f in mm/rev.
0,05–0,15
0,05–0,20
0,05–0,25
0,10–0,25

GX-27P /-27PF Radius

Turning



Parting / Grooving



GX-27P /-27PF Radius	Depth of Cut a_p in mm							
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0
Radius RE in mm	Feed rate f in mm/rev.							
1,5	0,10–0,45	0,05–0,45	0,05–0,40					
2	0,15–0,50	0,10–0,50	0,10–0,50	0,10–0,40				
2,5	0,15–0,60	0,10–0,60	0,10–0,60	0,10–0,50	0,10–0,45			
3	0,25–0,70	0,20–0,70	0,15–0,70	0,15–0,70	0,15–0,65	0,15–0,60	0,15–0,55	
4	0,25–0,80	0,20–0,80	0,15–0,80	0,15–0,80	0,15–0,80	0,15–0,80	0,15–0,75	0,15–0,70

GX-27P /-27PF Radius
Feed rate f in mm/rev.
0,05–0,15
0,075–0,20
0,10–0,25
0,10–0,30
0,15–0,35

GX-M1

Parting / Grooving



GX Radius grooving inserts

Parting / Grooving



GX circlip grooving

Grooving



GX-M1	Feed rate f in mm/rev.
Cutting width in mm	
2	0,05–0,15
3	0,10–0,20
4	0,10–0,25

GX Radius grooving insert	
Radius RE in mm	Feed rate f in mm/rev.
0,80	0,05–0,10
1,00	0,05–0,15
1,20	0,05–0,15

GX circlip grooves	
Cutting width in mm	Feed rate f in mm/rev.
0,60–1,70	0,02–0,09
1,95–2,25	0,05–0,10
2,75–3,25	0,05–0,12


Feed guide and machining instructions for axial grooving and face turning with GX 24 axial

Approximate feed rates

GX

Designation				$a_{p,max}$ mm
	f in mm/rev.	f in mm/rev.		
GX 24-2 E 3.00 ..	0,05–0,15	0,05–0,20	2,5	
GX 24-3 E 4.00 ..	0,05–0,15	0,05–0,25	3,0	
GX 24-3 E 5.00 ..	0,05–0,15	0,10–0,25	3,0	
GX 24-4 E 6.00 ..	0,05–0,20	0,10–0,30	3,5	


Axial grooving

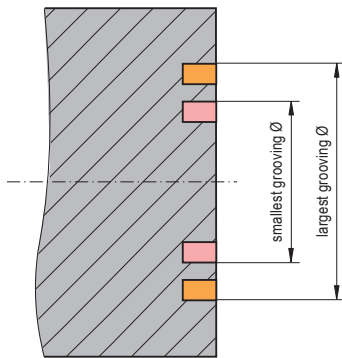

It is only possible to plunge within the fixed diameter range of the axial grooving module or monoholder (e.g. 50 - 70 mm).

Important: The indicated diameter range is always valid for the external diameter of the groove!


Axial grooving – Groove widening

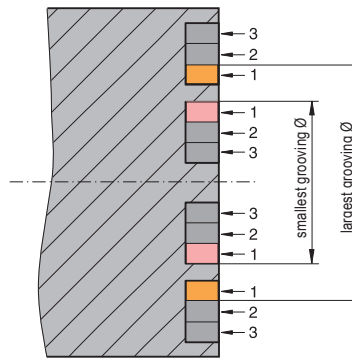

In case of face turning it is possible to widen the groove above and below the diameter range indicated on the Axial grooving module or monoholder.

Important: Only the first groove must lie within the diameter range of the axial grooving module or axial monoholder. The depth of the widening groove must not be larger than the depth of the original groove.

Axial grooving and face turning

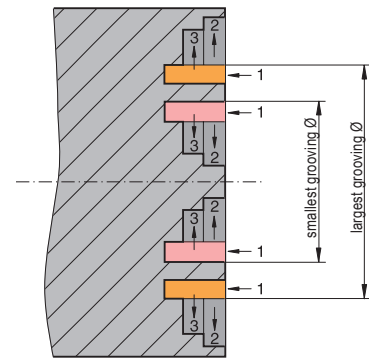


Groove widening by face turning in the diameter range above and below the values specified for the Axial grooving module and Axial monoholder are possible.

Important: Only the first groove must lie within the diameter range of the module.



Attention: The diameter of face grooves must lie within the diameter range indicated on the axial grooving module and axial monoholder. Not following this range will result in the tool being damaged or destroyed.

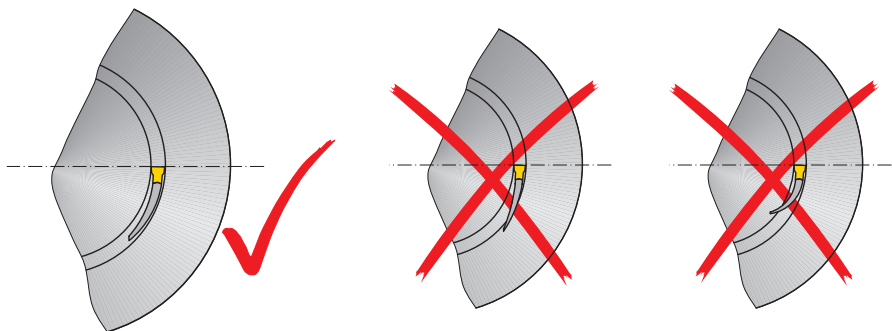

Correct Axial mono holder

Incorrect Axial mono holder

SX – Depths of cut and feed rates

SX -F2

Turning



Parting / Grooving



SX -F2	Depth of Cut a_p in mm									SX -F2
	0,50	0,75	1,00	1,25	1,50	1,75	2,00	2,25	2,50	
Cutting width in mm	Feed rate f in mm/rev.									Feed rate f in mm/rev.
2	0,03–0,15	0,03–0,15	0,03–0,15	0,03–0,10						0,05–0,15
3	0,04–0,17	0,04–0,17	0,04–0,17	0,04–0,15	0,04–0,13	0,04–0,12				0,075–0,20
4	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,20	0,05–0,17	0,05–0,15			0,10–0,25

SX-M2

Turning



Parting / Grooving



SX-M2	Depth of Cut a_p in mm								SX-M2
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	
Cutting width in mm	Feed rate f in mm/rev.								Feed rate f in mm/rev.
2	0,05–0,17	0,05–0,13	0,05–0,10						0,05–0,15
3	0,07–0,20	0,07–0,20	0,07–0,18	0,07–0,15					0,075–0,20
4	0,10–0,25	0,10–0,25	0,10–0,25	0,10–0,22	0,10–0,18				0,10–0,25
5	0,12–0,27	0,12–0,27	0,12–0,27	0,12–0,25	0,12–0,22				0,10–0,30
6	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,30	0,15–0,25	0,15–0,20			0,15–0,35

SX-27P

Turning



Parting / Grooving



SX-27P	Depth of Cut a_p in mm								SX-27P
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	
Cutting width in mm	Feed rate f in mm/rev.								Feed rate f in mm/rev.
2	0,05–0,23	0,05–0,23	0,05–0,23	0,05–0,20					0,05–0,20
3	0,05–0,25	0,05–0,25	0,05–0,25	0,05–0,25	0,05–0,20				0,05–0,25
4	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,30	0,10–0,25			0,05–0,30

SX/LX – Depths of cut and feed rates

SX-M1

Parting / Grooving



SX-M1	Feed rate f in mm/rev.
Cutting width in mm	
2	0,05–0,15
3	0,10–0,20
4	0,10–0,25
5	0,15–0,30
6	0,15–0,35

SX-M7

Parting / Grooving



SX-M7	Feed rate f in mm/rev.
Cutting width in mm	
2	0,10–0,20
3	0,10–0,20
4	0,10–0,20
5	0,15–0,25
6	0,15–0,25

SX-M8

Parting / Grooving



SX-M8	Feed rate f in mm/rev.
Cutting width in mm	
2	0,05–0,20
3	0,05–0,20
4	0,05–0,15
5	0,05–0,15
6	0,05–0,15

SX-M3

Turning



SX-M3	Depth of Cut a_p in mm							
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0
Radius in mm	Feed rate f in mm/rev.							
1,5	0,15–0,35	0,15–0,35	0,15–0,30					
2	0,15–0,40	0,15–0,40	0,15–0,40	0,15–0,30				
2,5	0,15–0,50	0,15–0,50	0,15–0,50	0,15–0,40	0,15–0,35			
3	0,20–0,70	0,20–0,70	0,20–0,70	0,20–0,60	0,20–0,50	0,20–0,40		

Parting / Grooving



SX-M3	Feed rate f in mm/rev.
	0,05–0,20
	0,10–0,25
	0,10–0,25
	0,10–0,35

LX-M2

Turning



LX-M2	Depth of Cut a_p in mm							
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0
Cutting width in mm	Feed rate f in mm/rev.							
8	0,17–0,45	0,17–0,45	0,17–0,45	0,17–0,45	0,17–0,40	0,17–0,37	0,17–0,35	
10	0,20–0,50	0,20–0,50	0,20–0,50	0,20–0,50	0,20–0,46	0,20–0,42	0,20–0,38	0,20–0,35

Parting / Grooving



LX-M2	Feed rate f in mm/rev.
	0,20–0,50
	0,20–0,50

LX-M3

Turning



LX-M3	Depth of Cut a_p in mm							
	0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0
Radius in mm	Feed rate f in mm/rev.							
4	0,25–0,80	0,25–0,80	0,25–0,80	0,25–0,80	0,25–0,80	0,25–0,70	0,25–0,60	0,25–0,50

Parting / Grooving



LX-M3	Feed rate f in mm/rev.
	0,15–0,35

AX/FX – Depths of cut and feed rates

AX-F50

Face turning



AX-F50	Depth of Cut a_p in mm			
	0,5	1,0	1,5	2,3
Size	Feed rate f in mm/rev.			
AX 05	0,03–0,10	0,03–0,10		
AX 10	0,03–0,13	0,03–0,13	0,03–0,135	
AX 15	0,03–0,15	0,03–0,15	0,03–0,15	0,03–0,15

Axial grooving



1. Plunging	
Feed rate f in mm/rev.	Feed rate f in mm/rev.
0,025–0,080	0,025–0,20
0,025–0,065	0,05–0,25
0,025–0,050	0,05–0,30

FX-F1

Parting / Grooving



FX-F1	Feed rate f in mm/rev.
Cutting width in mm	
2,2	0,025–0,10
3,1	0,05–0,15
4,1	0,05–0,20

FX-M1

Parting / Grooving



FX-M1	Feed rate f in mm/rev.
Cutting width in mm	
2,20	0,05–0,15
3,10	0,08–0,18
4,10	0,10–0,20
5,10	0,15–0,28
6,50	0,15–0,33
8,20	0,20–0,40
9,70	0,20–0,40

FX-27P

Parting / Grooving



FX-27P	Feed rate f in mm/rev.
Cutting width in mm	
2,20	0,01–0,10
3,10	0,015–0,125
4,10	0,05–0,15

FX-R2

Grooving



FX-R2	Feed rate f in mm/rev.
Cutting width in mm	
3,10	0,10–0,275
4,10	0,15–0,35

TC – Reference values for profile depth and number of passes



All listed values are guide values for steel machining

Metric ISO 60° external thread

Pitch in mm	0,5	0,75	1,0	1,25	1,5	1,75	2,0	2,5	3,0	3,5	4,0	4,5	5,0
Number/cuts	4–6	4–7	4–8	5–9	6–10	7–11	8–12	9–14	10–18	10–18	12–20	12–20	12–20
Thread profile depth in mm	0,32	0,48	0,64	0,8	0,95	1,10	1,26	1,58	1,89	2,21	2,53	2,84	3,16

Metric ISO 60° internal thread

Pitch in mm	0,5	0,75	1,0	1,25	1,5	1,75	2,0	2,5	3,0	3,5	4,0	4,5	5,0
Number/cuts	4–6	4–7	4–8	5–9	6–10	7–11	8–12	9–14	10–18	10–18	12–20	12–20	12–20
Thread profile depth in mm	0,30	0,45	0,59	0,74	0,89	1,02	1,17	1,46	1,76	2,02	2,35	2,64	2,93

Whitworth 55° external and internal thread

TPI	28	26	24	20	19	18	16	14	12	11	10	9	8	7	6	5
Number/cuts	5–8	5–8	5–9	5–9	6–10	6–10	7–11	8–12	9–14	9–14	10–17	10–18	10–18	12–20	12–20	12–20
Thread profile depth in mm	0,60	0,65	0,70	0,84	0,88	0,93	1,05	1,20	1,40	1,53	1,68	1,87	2,11	2,41	2,81	3,37

Partial profile 60° external and internal thread

External	TC 16–2EI–AG60																
	TC 16–1EI–A60								TC 16–2EI–G60				TC 16–3EI–N60				
Pitch in mm	0,5	0,75	1,0	1,25	1,5	1,75	2,0	2,5	3,0	1,75	2,0	2,5	3,0	3,5	4,0	4,5	5,0
Number/cuts	4–6	4–7	5–9	6–10	7–11	8–12	9–14	10–15	12–19	8–12	9–14	10–15	12–20	12–20	13–21	14–22	14–22
Thread profile depth in mm	0,33	0,52	0,71	0,90	1,09	1,28	1,47	1,84	2,22	1,23	1,42	1,79	2,17	2,45	2,83	3,21	3,59

Internal	TC 16–2EI–AG60																
	TC 16–1EI–A60								TC 16–2EI–G60				TC 16–3EI–N60				
Pitch in mm	0,5	0,75	1,0	1,25	1,5	1,75	2,0	2,5	3,0	1,75	2,0	2,5	3,0	3,5	4,0	4,5	5,0
Number/cuts	4–6	4–7	5–9	6–10	7–11	8–12	9–14	10–15	12–19	8–12	9–14	10–15	12–20	12–20	13–21	14–22	14–22
Thread profile depth in mm	0,27	0,44	0,60	0,76	0,92	1,09	1,25	1,57	1,90	1,04	1,20	1,52	1,85	2,07	2,40	2,72	3,05


Partial profile 55° external and internal thread

External	TC 16–2EI–AG55													
	TC 16–1EI–A55													
TPI	28	26	24	20	19	18	16	14	12	11	10	9	8	
Number/cuts	5–8	5–8	6–9	6–9	7–12	7–12	8–14	9–14	10–16	10–16	11–18	12–20	12–20	
Thread profile depth in mm	0,66	0,72	0,79	0,95	1,01	1,07	1,21	1,39	1,63	1,79	1,97	2,20	2,48	


Internal	TC 16–2EI–G55							TC 16–3EI–N55		
	TPI	14	12	11	10	9	8	7	6	5
Number/cuts	8–12	9–14	10–15	11–18	12–20	12–20	12–20	12–20	14–22	
Thread profile depth in mm	1,22	1,46	1,56	1,80	2,03	2,31	2,40	2,89	3,56	

Comparison threading system with TC and conventional

TC




- ▲ Neutral configuration of insert makes operation in both directions possible
- ▲ Only one threading insert per pitch for partial profile and Whitworth thread; only two threading inserts (internal – external) per pitch for ISO threads
- ▲ Reduced stock holding
- ▲ good chip formation due to chip breaker with rake angle + 10 °




Greater efficiency through:

- ▲ shorter operating time
- ▲ Less tool changing
- ▲ High stability with small overhang
- ▲ Material saving
- ▲ Thread turning between shoulders
- ▲ Fewer tools and indexable inserts




- ▲ Very good access to workpiece, therefore use of tailstock also possible with small thread diameters

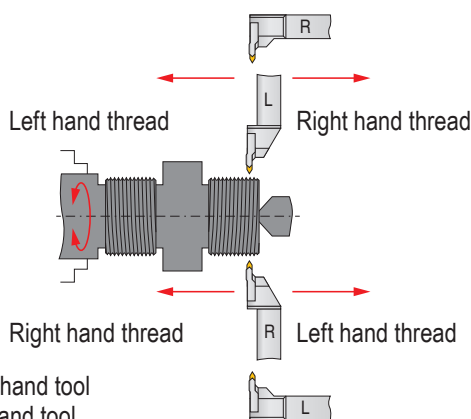


R = Right hand tool
L = Left hand tool

- ▲ ease of use, as the tools have no pitch angle correction they can be used in both directions


Conventional



- ▲ Right-hand and left-hand version of indexable insert, therefore operation only in one direction
- ▲ For every pitch 4 threading inserts are necessary (right – left, internal – external)




- ▲ For this machining method 2 tools are required
- ▲ additional material and stability loss with large overhang



- ▲ poor accessibility
- ▲ Collision danger

Right hand thread

Left hand thread

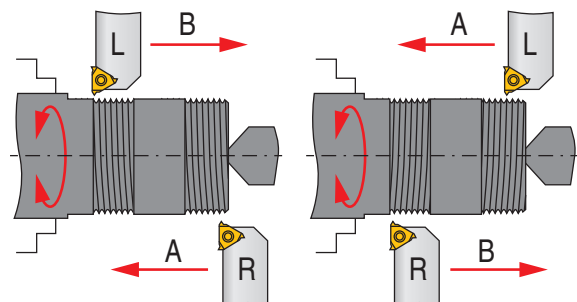


- ▲ With conventional thread turning the correction of the helix angle is necessary, therefore a high degree of application know-how is required
- ▲ Can only be operated in one direction

ModularClamp



The ModularClamp grooving modules are matched according to size on a particular workpiece diameter CODX. If the diameter of the workpiece is greater than CODX of the grooving Modules, this reduces the achievable penetration depth by the dimension „a“. The extent of reduction can be determined with the following table.

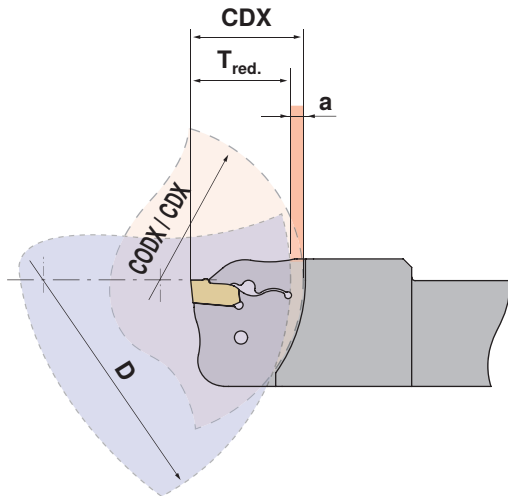

- CDX** maximum plunge depth in mm
- CODX** maximum workpiece Ø with full penetration depth in mm
- a** Reduction amount in mm

$$T_{red.} = CDX - a$$

Grooving depth reduction

Size	Reduction a (mm) of the maximum grooving depth (CDX)																
		0,5	1,0	1,5	2,0	2,5	3,0	3,5	4,0	4,5	5,0	5,5	6,0	6,5	7,0	7,5	8,0
E12	35	40	45	60	75	115	>250										
E16	50	55	60	70	80	100	130	200	>420								
E20	60	65	70	75	85	95	110	130	165	220	>330						
E25	75	80	85	90	100	110	125	140	160	190	240	320	>500				
E32	95	100	105	110	120	125	135	145	160	180	200	225	270	320	400	530	>800

Workpiece diameter D (mm)

Maximum workpiece diameter (CODX) with full penetration depth (CDX) in mm

11

Calculation example:

E25R21-GX24-3


Size 25 CDX = 21 mm, Ø 75 mm

$$D = \text{Ø } 100 \text{ mm} \qquad CDX - a = T_{red.}$$

$$21 - 2 = 19 \text{ mm}$$

MonoClamp

SX

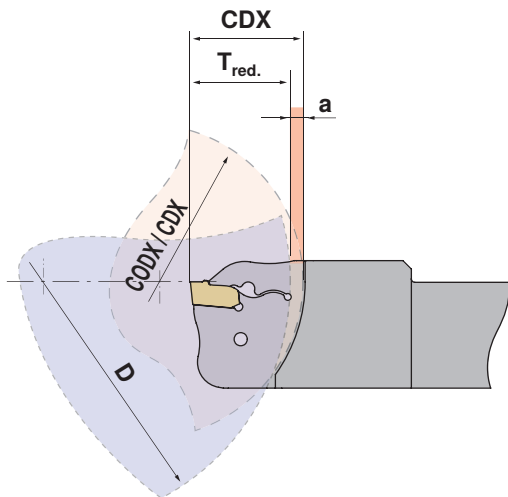

Depending on the groove width and shank size, the MonoClamp tools are designed for use with a specific workpiece diameter CODX. If the workpiece diameter is larger than the CODX of the grooving module, the achievable groove depth is reduced by the dimension „a“. The extent of the reduction is determined using the following table.

- CDX** maximum plunge depth in mm
- CODX** maximum workpiece Ø with full penetration depth in mm
- a** Reduction amount in mm

$$T_{red.} = CDX - a$$

Grooving depth reduction

Shank	Reduction a (mm) of the maximum grooving depth (CDX)																	
	0	0,5	1	1,5	2	2,5	3	3,5	4	4,5	5	5,5	6	6,5	7	7,5	8	
E12R/L0022...	44	70	80	95	115	150	225	>450										
E16R/L0026...	52	90	105	125	155	210	305	>600										
E20R/L0026...	52	110	125	140	160	195	240	320	475	>950								
E20R/L0033...	66	110	125	140	160	195	240	320	475	>950								
E25R/L0026...	52	140	160	190	235	310	465	>930										
E25R/L0033...	66	155	175	200	230	275	340	450	675	>1350								
E25R/L0040...	80	155	175	200	230	275	340	450	675	>1350								

Workpiece diameter D (mm)

Maximum workpiece diameter (CODX) with full penetration depth (CDX) in mm

Calculation example:

E25R0033...

CDX = 33 mm, Ø 66 mm

$$D = \text{Ø } 200 \text{ mm} \qquad CDX - a = T_{red.}$$

$$33 - 1,5 = 31,5 \text{ mm}$$


Clamping Method – SX-System

System function – inserting and removing the cutting inserts

Precision system for internal and external grooving.


The key has been designed in such a way that it will not stress the material beyond its 'elastic limit'.

With this alternate system the material always remains in its flexible range and provides a substantial increase in tool life.

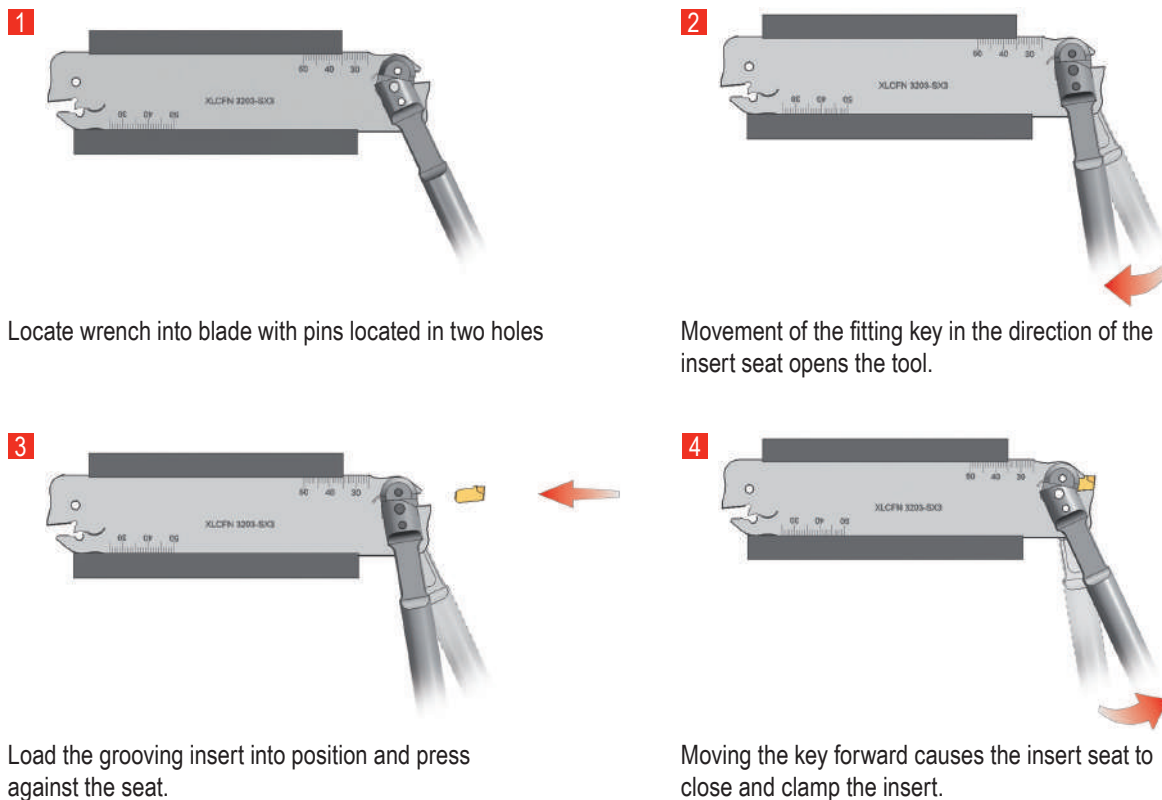

i When changing the inserts, always maintain tension on the key!

The clamp is designed so that the wrench can be inserted from both sides of the blade according to the accessibility.

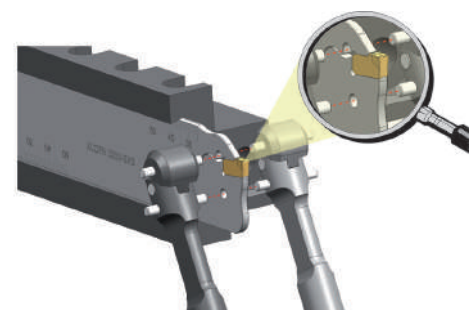


Maximum blade projection when turning

Blade	max. overhang
SX 2 – SX 3	25 mm
SX 4 – SX 5	30 mm
SX 6	35 mm




Clamping function – ModularClamp-Module

Module unclamped



▲ Gap between module and support face for axial clamping


Module clamped

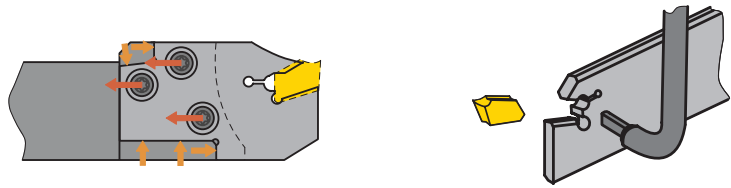

▲ Axial clamping with support face
▲ Connection free from play, therefore maximum stability

GX LX
AX


Active insert clamping

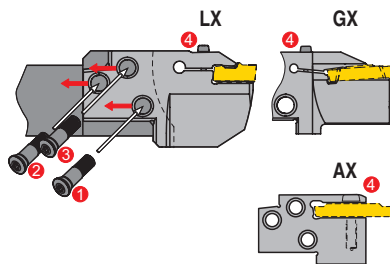

Clamping screws 1, 2 and 3 are used to clamp the modules.
The insert is clamped in the module via the additional screw 4.

FX SX


Self clamping of the insert

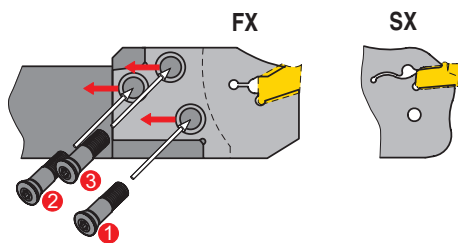

Clamping screws 1, 2 and 3 are used for clamping the module.
The insert is self-clamping.

GX TC


Active insert clamping

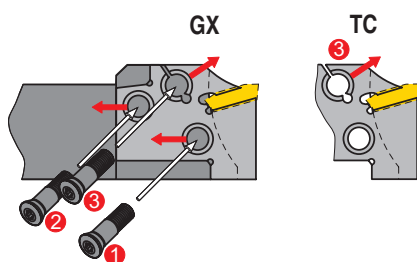

Clamping screws 1 and 2 are used for clamping the module.
Important: first tighten clamp screws 1 and 2.
Then clamp the insert with screw 3.

Torque Moment ModularClamp Module Screws

ModularClamp – Tool holder

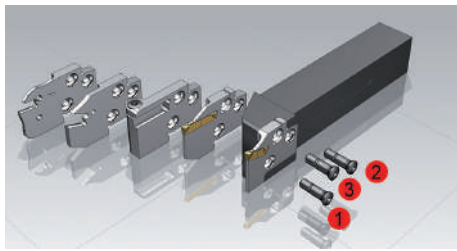

1 Tighten screws to the correct Torque moment in this order.

ModularClamp – Tool holder	Screw	Torx	Torque moment	
			Nm	in.lbs
E12..	M2,5x10	T08	1,2	10,6
E16..	M3,5x12,5	T15	3,2	28,3
E20..	M4x14	T15	4,0	35,4
E25..	M5x18	T20	5,0	44,3
E32..	M6x20	T25	6,0	53,1

ModularClamp – Boring bar



1 Tighten screws to the correct Torque moment in this order.

ModularClamp – Boring bar	Screw	Torx	Torque moment	
			Nm	in.lbs
I16..	M2,5x10	T08	1,2	10,6
I20..	M3x11	T10	2,0	17,7
I25..	M3,5x12,5	T15	3,2	28,3
I32..	M4,5x17	T20	4,0	35,4
I40..	M5x18	T20	5,0	44,3

Tightening torque for the insert clamping

Recommended tightening torque

Grooving systems	Screw	Torx	Torque moment	
			Nm	in.lbs
GX / AX / LX	M3,5	T15	3,2	28,3
	M4,0	T15/T20	4,0	35,4
	M5,0	T20	5,0	44,3


Advantages due to DirectCooling

Internal coolant supply with groove machining has a decisively positive effect on your turning process. In our CERATIZIT grooving range, the following grooving systems have an internal coolant supply:

- ▲ SX Grooving holder (single tool)

Advantages due to DirectCooling

- ▲ Improved chip control
- ▲ Longer service life of the indexable insert
- ▲ Greater process security
- ▲ Application of higher cutting data

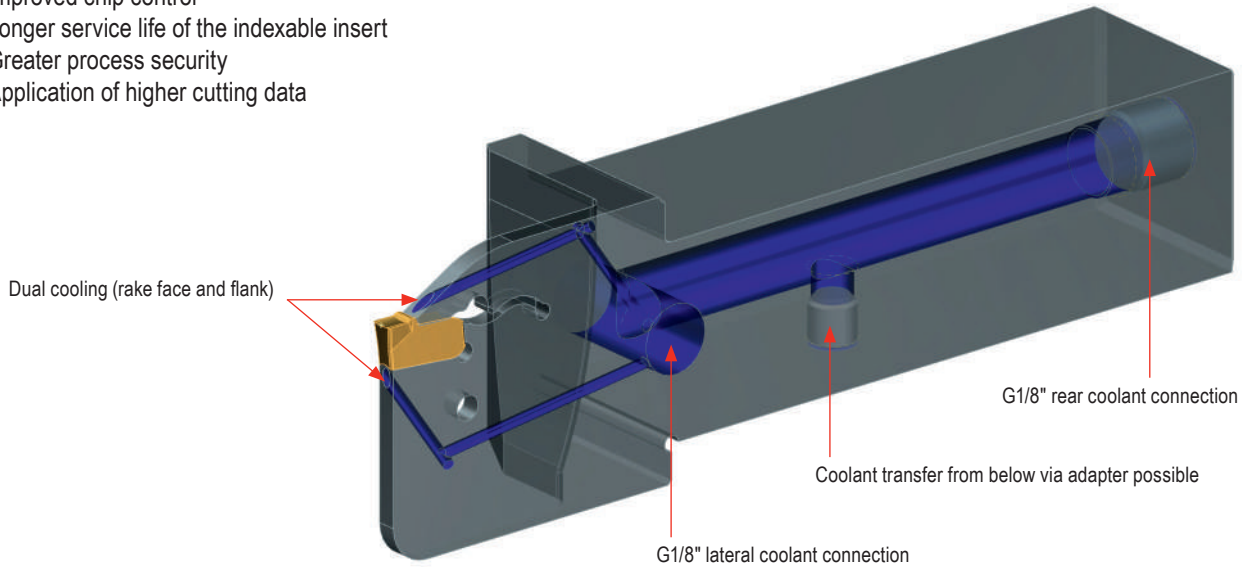

Advantages of the trochoidal turning strategy



- ▲ Less wear and longer tool life due to softer entry and exit
- ▲ Smaller angle of engagement = less vibration
- ▲ Up to 40% higher feed rate values possible
- ▲ Broad field of application in austenitic steels, heat-resistant steels, Inconel and nickel-base alloys as well as long-chipping ductile materials
- ▲ Savings on tools

Trochoidal turning with support of the following CAM systems:

- ▲ hyperMill – High-performance turning
- ▲ Esprit CAM – ProfitTurning
- ▲ SolidCAM – Turning
- ▲ EdgeCAM – Waveform turning
- ▲ MasterCAM – Dynamic turning


Possible applications

- ▲ Radial and axial recesses and grooves
- ▲ Rough machining – high-speed turning with button insert

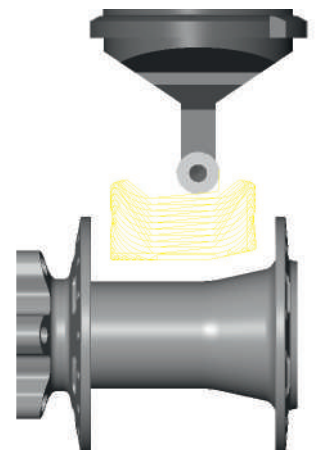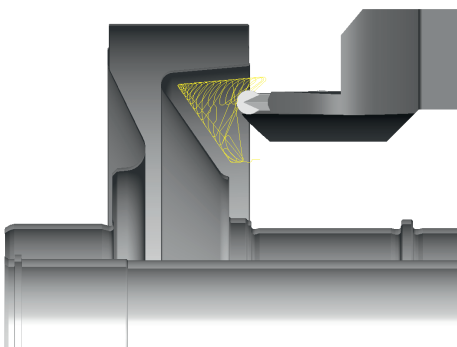


General references

Tool position

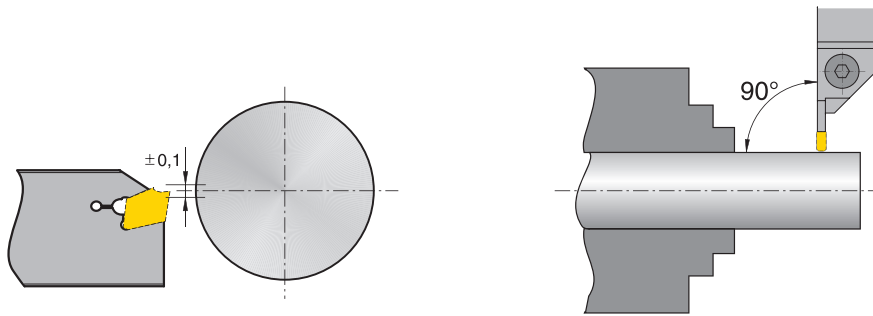


Tool overhang

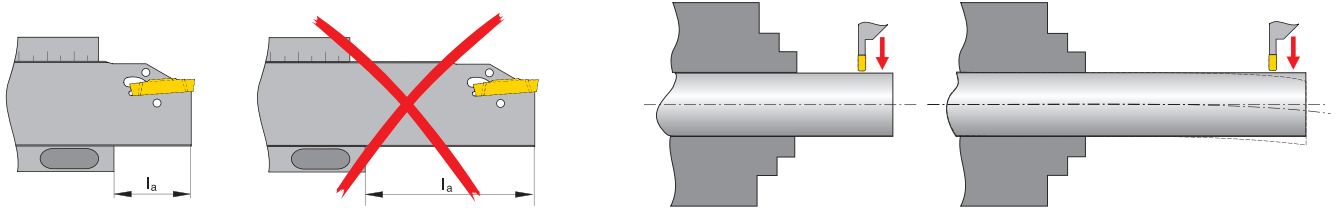


i As a rule of thumb: Overhang l_a should not be greater than $8 \times s$ (Groove width).


References for Parting off



From $\varnothing 5$ mm on, reduce feed "f" by approx. 50%. No parting across centre (risk of breakage).




For parting pip-free, use R or L inserts. In order to minimize lateral deflection reduce feed by approx. 20–50 %.




In order to prevent ring formation, use R or L inserts. Reduce feed "f" because of lateral deflection by approx. 20 % - 50%.

11

References for grooving



When grooving with an axial displacement the width „a“ should amount to at least 70 % of the grooving width „s“.



When grooving oblique surfaces the feed should be reduced by approx. 20% - 50 % until fully engaged.

Trouble shooting guide for grooving FX/SX/GX/LX

Type of problem												
Type of wear				Work piece problems				Swarf control				
Edge breakage	Built-up edge	Wear on clearance face	Plastic deformation	Vibration	Formation of pips and burrs	Chattered surface	Surface quality	Chip too long (snarl chip)	Chip too short (fragmented chip)			
	↑	↓	↓	↓			↑	↓		Cutting speed	Cutting data	Remedy measures
↓			↓	↑		↓	↓	↑	↓	Feed rate		
↓		↓	↓		↓	↓	↓			Feed rate at centre	-R ↑ -F ↓ -M ↓	
↑	↓		~	~	↓	↓	↓	↓	↑	Chip groove	Insert selection	
					●					R/L execution		
↑		↑	↑	↓	↓	↓	↑			Corner radius	larger ↑ smaller ↓	
↓		↑	↑							Tool Material	Wear resistance ↑ toughness ↓	
				↓		↑	↑			Groove width	General criteria	
~				~		~	~			Tool clamping		
~				~		~	~			Work piece clamping		
~				~			↓			Overhang		
~		~		~	~		~			Tip height		
	●	●	●		●		●	●		Cooling lubricant		

↑ raise, increase large influence
↑ raise, increase small influence

↓ avoid, reduce large influence
↓ avoid, reduce small influence

~ check, optimise
● use

Trouble shooting guide for TC threading

Type of problem																
Type of wear				Workpiece				Swarf control								
Wear on clearance face	Break out cut	Plastic deformation	Built-up edge	Formation of a shoulder at the external thread Ø	Profile	Surface quality	Chatter marks, vibrations	Chip too thick	Chip too thin	Chip shape (snarl chip)						
↓		↓	↑			↑	↓				Cutting speed	Cutting data	Remedy measures			
a, b	a, b		a, b	a, b		a, b	a, b	a, b		a, b	Feed			a – over the flanks b – Alternating flanks		
↑	↓	↓		↓	↓	↓	↓	↓	↑	~	Feed (Cutting depth)					
↓	↑	↑		~	~	↑	~	↑	↓	↓	Number of passes					
				●	●	●					Spring cut (Air cut)					
			●			●	●			●	Chip groove	Indexable insert selection	Remedy measures			
↑	↓	↑									Tool Material			↑ Wear resistance ↓ toughness		
				●	●	●					Full profile					
											Partial profile					
	~					~	~				Stable tool holder / insert	Various criteria	Remedy measures			
	~					~	~				Stable workpiece					
	↓					↓	↓				Overhang					
~	~	~			~	~	~				Tip height					
●	●	●	●	●		●					Cooling lubricant					

↑ raise, increase
large influence
↑ raise, increase
small influence

↓ avoid, reduce
large influence
↓ avoid, reduce
small influence

~ check, optimise
● use

Wear causes

Wear on clearance face



Abrasion on the flank, normal wear after a given operation time

Cause

- ▲ cutting speed too high
- ▲ grade with too low wear resistance
- ▲ insufficient coolant

Remedy

- ▲ Reduce the cutting speed
- ▲ select a more wear resistant grade
- ▲ Improve/check coolant feed

Edge chipping



Excessive mechanical stress on the cutting edge causing carbide particles to break out.


Cause

- ▲ too hard grade
- ▲ vibration
- ▲ too high feed and depth of cut
- ▲ chip impact

Remedy

- ▲ use tougher grade
- ▲ use negative geometry with chip breaker
- ▲ reduce overhang, check center height
- ▲ stabilize the cutting edge

Cratering



The outgoing hot chip causes cratering of the insert on the clamping surface.

Cause

- ▲ too high cutting speed, feed, or both
- ▲ too low rake angle
- ▲ grade with too low wear resistance
- ▲ incorrectly supplied cooling

Remedy

- ▲ Reduce cutting speed and / or feed
- ▲ Check coolant flow and / or increase pressure
- ▲ Use harder grade

Plastic deformation



Large mechanical load produces high temperature machining, this can lead to plastic deformation.

Cause

- ▲ too high operating temperature, thus softening the base material
- ▲ unsuitable grade
- ▲ inadequate coolant supply

Remedy

- ▲ Reduce the cutting speed
- ▲ select a more wear resistant grade
- ▲ use coolant

Built-up edge



Weld deposits of material on the cutting edge occurs when the chip does not flow caused by low average temperature.


Cause

- ▲ too low cutting speed
- ▲ too low rake angle
- ▲ Incorrect grade
- ▲ lack of cooling / lubrication

Remedy

- ▲ Increase the cutting speed
- ▲ Increase rake angle
- ▲ Use TiN coating
- ▲ increase coolant strength

Notch wear



Contraction at maximum cutting depth.














Cause

- ▲ Oxidation at the cutting edge
- ▲ Too high a temperature at the edge












Remedy

- ▲ Use different cutting depths
- ▲ Reduce cutting speed
- ▲ Improve/check coolant feed



Chip breakers / Applications

System GX		Smooth cut	irregular cut	interrupted cut	Model	f in mm/rev.
						
<p>-F2</p> <ul style="list-style-type: none"> ▲ very positive geometry ▲ honed cutting edge ▲ low feed rates ▲ low cutting forces ▲ first choice for stainless materials 		CTCP325	CTP1340	CTPP345		0,05–0,15
		CTP1340	CTP1340/CTPP345	CTPP345		
		CTCP325	CTP1340			
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
<p>-Standard / -E</p> <ul style="list-style-type: none"> ▲ positive geometry ▲ low-medium feed rates ▲ universal application ▲ first choice for axial grooving 		CTCP325	CTCP335/CTP1340	CTPP345		0,05–0,17
		CTP1340	CTP1340/CTPP345	CTPP345		
		CTCP325	CTCP335/CTP1340	CTP1340		
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
<p>-M40</p> <ul style="list-style-type: none"> ▲ stable geometry ▲ medium feed rates ▲ universal application ▲ good chip control 		CTCP325	CTP1340	CTPP345		0,075–0,20
		CTP1340	CTP1340/CTPP345	CTPP345		
		CTCP325	CTCP325/CTP1340	CTP1340		
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
<p>-M1</p> <ul style="list-style-type: none"> ▲ very stable cutting edge ▲ medium-high feed rates ▲ for interrupted cut ▲ for high tensile materials ▲ first choice for parting off 		CTCP325	CTP1340	CTPP345		0,1–0,20
		CTP1340	CTP1340/CTPP345	CTPP345		
		CTCP325	CTCP325/CTP1340	CTP1340		
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
<p>-27P</p> <ul style="list-style-type: none"> ▲ very positive geometry ▲ ground periphery ▲ sharp cutting edge ▲ polished chip breaker ▲ first choice for non-ferrous metals 						0,05–0,25
		H216T	H216T	H216T		
		H216T	H216T	H216T		
		H216T	H216T			
		H216T				



Chip breakers / Applications

System GX		Smooth cut	irregular cut	interrupted cut	Model	f in mm/rev.
						
Standard – Radius ▲ positive geometry ▲ honed cutting edge ▲ low-medium feed rates ▲ low cutting forces ▲ Radius grooving/copy turning		CTCP325	CTCP325/CTP1340	CTP1340		0,05–0,20
		CTP1340	CTP1340	CTP1340		
		CTCP325	CTCP325/CTP1340	CTP1340		
		CTP1340	CTP1340			
		CTCP325				
		CTP1340	CTP1340			
-M3 – Radius ▲ stable geometry ▲ medium-high feed rates ▲ high surface quality ▲ Radius grooving/copy turning		CTCP325	CTCP325/CTCP335	CTCP335		0,07–0,20
		CTCP335	CTCP335			
		CTCP325	CTCP325/CTCP335	CTCP335		
		CTCP325				
		CTCP325				
		CTCP325				
-27P – Radius ▲ very positive geometry ▲ ground periphery ▲ sharp cutting edge ▲ polished chip breaker ▲ first choice for non-ferrous metals						0,05–0,30
		H216T	H216T	H216T		
		H216T	H216T	H216T		
		H216T	H216T			
		H216T				
M33 ▲ Radius grooving & copy turning ▲ Finishing geometry ▲ Specially for tough and ductile steels ▲ Low - medium feed rates ▲ High surface quality		CTCP325	CTCP325	CTCP325		0,05 - 0,20
		CTCP325	CTCP325	CTCP325		
		CTCP325	CTCP325	CTCP325		


















Circlip grooving

Standard ▲ positive geometry ▲ honed cutting edge ▲ low feed rates ▲ small corner radius ▲ Circlip grooves		CTP1340	CTP1340	CTP1340		0,05–0,30
		CTP1340	CTP1340	CTP1340		
		CTP1340	CTP1340	CTP1340		
		CTP1340	CTP1340	CTP1340		
		CTP1340	CTP1340	CTP1340		
		CTP1340	CTP1340			
















System AX

-F50 ▲ positive geometry ▲ honed cutting edge ▲ low feed rates ▲ small corner radius ▲ Circlip grooves		CTP1340	CTP1340	CTP1340		0,025–0,125
		CTP1340	CTP1340	CTP1340		
		CTP1340	CTP1340	CTP1340		
		CTP1340	CTP1340	CTP1340		
		CTP1340	CTP1340	CTP1340		
		CTP1340	CTP1340			

Chip breakers / Applications

System SX		Smooth cut	irregular cut	interrupted cut	Model	f in mm/rev.
						
-F2 ▲ very positive geometry ▲ honed cutting edge ▲ low feed rates ▲ low cutting forces ▲ first choice for stainless materials		CTCP325	CTCP325/CTP1340	CTPP345		0,05–0,15
		CTP1340	CTP1340/CTPP345	CTPP345		
		CTCP325	CTCP325/CTP1340	CTP1340		
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
-M1 ▲ very stable cutting edge ▲ medium-high feed rates ▲ for interrupted cut ▲ for high tensile materials ▲ first choice for parting off		CTCP325	CTCP335/CTP1340	CTPP345		0,10–0,20
		CTP1340	CTP1340	CTPP345		
		CTCP325	CTCP325/CTP1340	CTP1340		
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
-M2 ▲ stable geometry ▲ medium feed rates ▲ universal application ▲ good chip control		CTCP325	CTCP335/CTP1340	CTPP345		0,075–0,20
		CTP1340	CTP1340	CTPP345		
		CTCP325	CTCP325/CTP1340	CTP1340		
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
-27P ▲ very positive geometry ▲ ground periphery ▲ sharp cutting edge ▲ polished chip breaker ▲ first choice for non-ferrous metals		H216T	H216T	H216T		0,05–0,25
		H216T	H216T	H216T		
		H216T	H216T	H216T		
		H216T	H216T	H216T		
		H216T				
		H216T				
-M3 – Radius ▲ stable geometry ▲ medium-high feed rates ▲ high surface quality ▲ Radius grooving / Copy turning		CTCP335	CTCP335/CTP1340	CTP1340		0,05–0,20
		CTP1340	CTP1340	CTP1340		
		CTCP335	CTCP335/CTP1340	CTP1340		
		CTP1340	CTP1340	CTP1340		
		CTP1340				
		CTP1340	CTP1340			
M7 ▲ Grooving & parting off ▲ First choice for steel ▲ Medium - high feed rates ▲ Good chip control ▲ Positive geometry		CTP1340	CTP1340			0,10 - 0,20
		CTP1340	CTP1340			
		CTP1340	CTP1340			
		CTP1340	CTP1340			
		CTP1340	CTP1340			
		CTP1340	CTP1340			
M8 ▲ Grooving & parting off ▲ Ground cutting edge ▲ Good chip control ▲ First choice for stainless steel ▲ Low feeds		CTP1340	CTP1340			0,03 - 0,15
		CTP1340	CTP1340			
		CTP1340	CTP1340			
		CTP1340	CTP1340			
		CTP1340	CTP1340			
		CTP1340	CTP1340			

Chip breakers / Applications

System LX		Smooth cut	irregular cut	interrupted cut	Model	f in mm/rev.
						
-M2 ▲ stable geometry ▲ medium feed rates ▲ universal application ▲ good chip control		CTCP325	CTCP335/CTP1340	CTCP335		0,20–0,50
		CTCP335	CTP1340	CTP1340		
		CTCP325	CTCP325	CTCP335		
		CTP1340	CTP1340	CTP1340		
		CTCP325				
		CTP1340	CTP1340			
		CTP1340	CTP1340			
-M3 – Radius ▲ stable geometry ▲ medium-high feed rates ▲ high surface quality ▲ Radius grooving/copy turning		CTCP325	CTCP335/CTP1340	CTCP335		0,15–0,35
		CTCP335	CTCP335/CTP1340	CTP1340		
		CTCP325	CTCP325/CTCP335	CTCP335		
		CTP1340	CTP1340	CTP1340		
		CTCP325				
		CTP1340	CTP1340			
		CTP1340	CTP1340			
-F1 ▲ very positive geometry ▲ low-medium feed rates ▲ low cutting forces ▲ good chip control ▲ low cutting edge build up		CTCP325	CTCP325/CTP1340	CTPP345		0,05–0,15
		CTP1340	CTP1340/CTPP345	CTPP345		
		CTCP325	CTCP325/CTP1340	CTP1340		
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
		CTP1340	CTP1340			
-M1 ▲ very stable cutting edge ▲ medium-high feed rates ▲ for interrupted cut ▲ for high tensile materials ▲ first choice for parting off		CTCP325	CTCP335/CTP1340	CTPP345		0,08–0,20
		CTP1340	CTP1340/CTPP345	CTPP345		
		CTCP325	CTCP325/CTP1340	CTP1340		
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
		CTP1340	CTP1340			
-R2 ▲ very stable cutting edge ▲ high feed rates ▲ good chip control		CTCP325	CTCP325/CTP1340	CTPP345		0,10–0,27
		CTP1340	CTP1340/CTPP345	CTPP345		
		CTCP325	CTCP325/CTP1340	CTP1340		
		CTP1340	CTP1340	CTPP345		
		CTCP325				
		CTP1340	CTP1340			
		CTP1340	CTP1340			
-27P ▲ very positive geometry ▲ ground periphery ▲ sharp cutting edge ▲ polished chip breaker ▲ first choice for non-ferrous metals						0,03–0,13
		H216T	H216T	H216T		
		H216T	H216T	H216T		
		H216T	H216T			
		H216T				

Example of Coding Grooving Tools Grooving insert

GX	16	E	2	3.00	N	0.50
Grooving system (GX)	Insert length (16 mm)	Type of insert, application	Width class of the holder / module or support surface (2 mm)	Groove width (3.0 mm)	Insert seat N=Neutral L=Left Handed R=Right Handed	Corner radius size (0.5 mm)
E	25	12	R	GX	16	2
Module	Size (25 mm)	Maximum groove depth (12 mm)	Module version R=Right Handed L=Left Handed	Grooving system (GX)	Insert size (16 mm)	Width class ²

Basic holder

E	25	00	R	2525	L
Application E = external I = internal	Size (25 mm)	Approach angle 0°	Holder version R=Right Handed L=Left Handed	Shank type 25x25mm	Shank length L = (sh. ISO)

Monobloc tool holder

E	20	R	00	21	S3	2020	X	S	DC	GX24
Application E = external I = internal	Size (20 mm)	Approach angle 0°	Holder version R=Right Handed L=Left Handed	Groove depth (21 mm)	Groove width (3 mm)	Shank type 20x20 mm	Shank length X = (sh. ISO)	Insert clamping S = Key	Cooling system DC = DirectCooling	Grooving system/width (3 mm)




Summary

Grooving insert


GX 16-2	E3.00 N 0.50	E25 R 12 - GX 16-2	E25 R 00 - 2525L	E20 R/L 0021S3-2020X-S-DC-GX24
Grooving insert	Module	Basic holder	Monobloc tool holder	

Grade description

CTCP325



ISO | P25 | M20 | K30 | S25




Specifications:

Composition: Co 7.0%; mixed carbide 8.1%; WC balance | grain size: 1-2 µm |
Hardness: HV₃₀ 1470 | Layer system: CVD TiCN-Al₂O₃ Multilayer

Recommended use:

The wear-resistant solution for steel and cast iron materials at high cutting speeds

CTCP335



ISO | P35 | M30 | K35




Specifications:

Composition: Co 10.5%; mixed carbide 1.9%; WC balance | grain size: 1 µm | Hardness: HV₃₀ 1370 |
Layer system: CVD TiCN-Al₂O₃ Multilayer

Recommended use:

The reliable choice for machining steel and cast iron materials.

CTP1340



ISO | P30 | K30 | N30 | S30 | O30




Specifications:

Composition: Co 9.0%; mixed carbide 0.75%; WC balance | grain size: 0.7-1 µm | Hardness: HV₃₀ 1590 |
Layer system: PVD TiAlTaN


Recommended use:

The universal high-performance grade for steels, austenitic steel, cast iron materials and heat-resistant alloys

CTPP345



ISO | P45 | M40 | S40




Specifications:

Composition: Co 12.5%; mixed carbide 2.0%; WC balance | grain size: 1-1.5 µm | Hardness: HV₃₀ 1350 |
Layer system: PVD TiAlTaN


Recommended use:

The reliable solution for steel and austenitic steels in unstable conditions.

CTPP520



ISO | P20 | M25 | S25 | H05




Specification:

Composition: Co 6.0%; WC balance | Grain size: 1 µm | Hardness: HV₃₀ 1650 | Layer system: PVD AlTiN

Recommended use:

The wear-resistant thread turning grade for high cutting speeds.

CTPP535



ISO | P35 | M30 | K25 | S30




Specification:

Composition: Co 10%; Others 1.2%; WC balance | Grain size: 0.7 µm | Hardness: HV₃₀ 1600 |
Layer system: PVD AlTiN

Recommended use:

The tough thread turning grade for universal application.

H216T



ISO | K15 | N15 | S15 | O10




Specification:

Composition: Co 6.0%; WC balance | Grain size: 1 µm | Hardness: HV₃₀ 1630

Recommended application:

The uncoated carbide grade for the machining of aluminium and other non-ferrous metals

CWX500



ISO | P30 | M30 | K35 | N35 | S15 | H05 | O10



Specification:

Composition: Co 10.0%; Others 0.7 %, WC balance | Grain size: 1 µm | Hardness: HV₃₀ 1660

Recommended application:

The universal carbide grade for almost all materials

Application

